AIR FORCE



SIMULATING MAINTENANCE MANNING FOR NEW WEAPON SYSTEMS:

BUILDING AND OPERATING A SIMULATION MODEL

Donald C. Tetmeyer, Major, USAF

ADVANCED SYSTEMS DIVISION Wright-Patterson Air Force Base, Ohio 45433

William D. Moody, SMSgt, USAF

Headquarters, Air Force Systems Command Andrews Air Force Base, Maryland 20334

December 1974 Final Report for Period July 1971 - May 1974

Approved for public release; distribution unlimited

LABORATORY

NATIONAL TECHNICAL INFORMATION SERVICE U.S. Department of Commerce Springfield VA 22151

AIR FORCE SYSTEMS COMMAND

BROOKS AIR FORCE BASE, TEXAS 78235

NOTICE

When US Government drawings, specifications, or other data are used for any purpose other than a definitely related Government procurement operation, the Government thereby incurs no responsibility nor any obligation whatsoever, and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise, as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

This final report was submitted by Advanced Systems Division, Air Force Human Resources Laboratory, Wright-Patterson Air Force Base, Ohio 45433, under project 1124, with Hq Air Force Human Resources Laboratory (AFSC), Brooks Air Force Base, Texas 78235.

This report has been reviewed and cleared for open publication and/or public release by the appropriate Office of Information (OI) in accordance with AFR 190-17 and DoDD 5230.9. There is no objection to unlimited distribution of this report to the public at large, or by DDC to the National Technical Information Service (NTIS).

This technical report has been reviewed and is approved.

GORDON A. ECKSTRAND, Director Advanced Systems Division

Approved for publication.

HAROLD E. FISCHER, Colonel, USAF Commander

1-0

NOTICE

THIS DOCUMENT HAS BEEN REPRODUCED FROM THE BEST COPY FURNISHED US BY THE SPONSORING AGENCY. ALTHOUGH IT IS RECOGNIZED THAT CERTAIN PORTIONS ARE ILLEGIBLE, IT IS BEING RELEASED IN THE INTEREST OF MAKING AVAILABLE AS MUCH INFORMATION AS POSSIBLE.

REPORT DOCUMENTATION PAGE	READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER AFHRL-TR-74-97(II) 2. GOVT ACCESSION NO.	ADA011987
4. TITLE (and Subtitle) SIMULATING MAINTENANCE MANNING FOR NEW WEAPON SYSTEMS: BUILDING AND OPERATING A	5. TYPE OF REPORT A PERIOD COVERED Final July 1971 — May 1974
SIMULATION MODEL	6. PERFORMING ORG. REPORT NUMBER
7. AUTHOR(*) Donald C. Tetmeyer William D. Moody	B. CONTRACT OR GRANT NUMBER(s)
9. PERFORMING ORGANIZATION NAME AND ADDRESS	10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS
Advanced Systems Division Air Force Human Resources Laboratory Wright-Patterson Air Force Base, Ohio 45433	62703F 11240403
11. CONTROLLING OFFICE NAME AND ADDRESS Hq Air Force Human Resources Laboratory (AFSC)	12. REPORT DATE December 1974
Brooks Air Force Base, Texas 78235	13. NUMBER OF PAGES
14. MONITORING AGENCY NAME & ADDRESS(if different from Controlling Office)	15. SECURITY CLASS. (of this report)
	Unclassified
	15a. DECLASSIFICATION/DOWNGRADING SCHEDULE
16. DISTRIBUTION STATEMENT (of this Report)	
Approved for public release; distribution unlimited.	
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from	n Report)
18. SUPPLEMENTARY NOTES	
This report is the second in a series of 5 volumes.	
19. KEY WORDS (Continue on reverse side if necessary and identify by block number)	
maintenance manpower simulation	:
There is a need for a more responsive method for predicting mainte systems during development. This method should provide early estimates should be sensitive to the ways in which the new aircraft will be employ model was developed. In using the model, early estimates of maintenance Air Force experience with comparable subsystems and equipment on exi and environment. These data are meshed with a detailed operations scena model run on the Logistics Composite Model (LCOM) simulation progra	for use in trade offs and evaluations, and ved. A maintenance manpower simulation task data for the new aircraft are based on sting aircraft, factored for the new design ario and support concept assumptions in a

SECURITY CLASSIFICATION OF THIS PAGE (When Data Enter	

Item 20 (Continued)

analyzed in post-processor programs whose final output is a complete basic manning authorization document. This entire effort is reported in a five volume technical report. This volume II describes the procedures developed to build a maintenance simulation data base for a new aircraft, to run it with the Logistics Composite Model (LCOM) computer program, and to use the results to predict the maintenance manning required for a new aircraft flying a specific operations scenario. Computer programming knowledge is not necessary to follow and apply this instruction. The procedures presented have been tested and used at the Aeronautical Systems Division of Air Force Systems Command in building and operating simulation models of A-10 and A-7 aircraft.

Unclassified

SUMMARY

Problem |

There is a need for a more responsive method for predicting maintenance manpower requirements for aircraft systems during development. This method should provide early estimates for use in trade offs and evaluations, and should be sensitive to the ways in which the new aircraft will be employed.

Approach

A maintenance manpower simulation model was developed. In using the model, early estimates of maintenance task data for the new aircraft are based on Air Force experience with comparable subsystems and equipment on existing aircraft, factored for the new design and environment. These data are meshed with a detailed operations scenario and support concept assumptions in a model run on the Logistics Composite Model (LCOM) simulation program. The simulation output is iterated and analyzed in post-processor programs whose final output is a complete basic manning authorization document. This approach was evaluated by applying it to the A-10 Weapon System.

Results and Conclusions

The methodology and models were successfully applied on the A-10 program and are being considered for implementation on other aeronautical systems in or entering development. This method provides useful maintenance data in a more timely manner, can be rapidly updated, and can show the sensitivity of manning requirements to a wide range engineering design, support and operations alternatives. During the project procedures were developed to build a maintenance simulation data base for a new aircraft, to run it with the LCOM computer program, and to use the results to predict the maintenance manning required for a new aircraft flying a specific operations scenario. These are described in this report.

PREFACE

This report is the second of five volumes describing a new method for determining the maintenance manpower requirements of new aircraft.

Volume I - <u>Maintenance Manpower Management During Weapon System</u>
Development

Volume II - Building and Operating a Simulation Model

Volume III - Maintenance Data Analysis Programs

Volume IV - Data Base Management Programs

Volume V - Manpower Programs

This volume provides a detailed description of the procedures for using the Logistics Composite Model (LCOM) to determine maintenance manpower required for a new weapon system. It is intended to service as a manual of instruction and methodological source document. These procedures were developed by a joint research and development team at the Advanced Systems Division, Air Force Human Resources Laboratory (AFSC), Wright-Patterson AFB, Ohio. The team included collocated members from the Headquarters Air Force Systems Command and the A-10 Program Office, under the general guidance of a steering group at Headquarters Air Force Systems Command. Laboratory work was conducted under Project 1124, Human Resources in Aerospace System Development and Operation, Melvin T. Snyder, project scientist, and Task 112404; Adaptation of Operational Research Techniques to Air Force Human Resources Problems, Major Donald C. Tetmeyer, task scientist.

The work was initiated in July 1971 when the proposed research and development plan was approved by the Air Force Systems Command Council. This plan was documented in AFHRL-TR-74-31.

All members of the team and participating organizations who worked on the simulation models contributed to the final methodology. In addition to the listed authors, they include Mr. Frank Maher, Mrs. Sharon Nichols, and Dr. Richard Luckew of the Air Force Human Resources Laboratory: Mr. Craig McLean, Maj Michael Vasilik, Capt Eugene Benson, Capt Paul Verdier, Capt Carroll Widenhouse, Capt David Welch, Capt John Mallar and SSgt Thomas Shipley of the A-10 Program Office; Maj Michael York of Hq Air Force Systems Command; and Mr. Wayne Jansen, Maj Bobby Green, and Mr. Nathan Davis of the Aeronautical Systems Division. The generous cooperation of the LCOM program author, Mr. William Drake of Headquarters Air Force Logistics Command, and of the Headquarters Tactical Air Command LCOM Simulation Modeling Team of Lt Col Gerald Thompson, Maj Richard Gunkel, Mr. Robert Leckliter, and Mr. Owen Dinger, made the work much easier. The effort might never have been brought to a successful conclusion without the visibility, support and guidance provided by the Headquarters Air Force Systems Command Steering Committee: Lt Col Robert Mathias and Lt Col William Pope of the Deputy for Systems, who served successively as chairman; Lt Col Thomas Castaldo and Lt Col Joseph Beardsley of the Deputy for Operations (Management Engineering) and Lt Col John Ahlborn of the Deputy for Science and Technology.

TABLE OF CONTENTS

I.	Introduction	Page • 9
	Why Use a Simulation?	. 9
	An Overview of the Procedure	. 10
	How the Simulation Works	
	Relationship of the Input Formats	
II.	Defining an Operations Schedule	. 13
	Coordinating the Assumptions	. 13
	Developing a Basic Schedule	. 16
	Entering Mission Data on Forms 20	
	Phase and Periodic Inspections	. 19
	Entering Alert Missions on Forms 20 and Forms 15	
	Scheduling Total Requirements for Combat	
	Scheduling Total Requirements in Peacetime	
	Network Entry Points on Forms 17	. 28
	Additional Scenarios	. 28
III.	Main Aircraft Servicing Networks	. 28
	Content and Data Sources	. 28
	Coding the Networks	. 32
	Coding Network Call Sections	. 36
	Including Provisions for Unscheduled Maintenance	
	Preflight to Postflight Network	
	Networking Turnarounds and Scheduled Inspections	
	Networking Alert Missions	
	Networks for Peacetime Flying	. 47
IV.	Corrective Maintenance Networks	47
	Content and Data Sources	. 47
	Procedure	. 51
	Network Structure	. 53
	Coding Conventions	. 55
	Using the MDC Data Bank	. 56
	Computations with MSBMA	. 62
	Network with Expendable LRUs	. 65
	Engine Network	. 71
	Complex Avionics Networks	. 76

Table of Contents (Continued)

			Page
v.	Networks for Phased and Periodic Scheduled Maintenance	•	. 85
	Phased Inspections		
	Other Scheduled Inspections and Time Change Items	•	. 90
VI.	Building a Data Base		. 91
	Data Base Processing		. 91
	Debugging with Phase I	•	
	Translation into LCOM		. 97
	Building an LCOM Input File		
	Debugging the Input Processor		
	Establishing the Operations File		
VII.	Testing and Operating the Simulation		. 109
	LCOM Run Parameters		. 109
	LCOM Run Parameters	•	. 111
	Establishing Run Length		
	Full Simulation with Matrix Output	•	. 115
VIII.	Iterations to Constrain Direct Manning		. 118
	General Concept and Method		. 118
	Computing Daily Requirements		
	Allocating Daily Manning to Shifts		
	Procedure for Constraining Manning		
	Computing Direct Manning		. 124
	Example of Manning Computations	•	. 126
IX.	Determining Manning Requirements	•	. 126
	Integrating Simulation Results		. 126
	Producing a Basic Manpower Authorization Document		
	Variations and Updates		
Refere	nces		. 134
List o	f Symbols and Codes		. 135

LIST OF ILLUSTRATIONS

Figure 1	Model development and operation	Page 11
_		12
2	How the simulation works	
3	Relationship of inputs	14
4	Example of missions repeated daily	18
5	Cumulative probability distribution of takeoff times for night alert	21
6	Form 15 for night alert missions	22
7	Alert missions	24
8	Example of a 24 aircraft combat schedule	26
9	Example of a 24 aircraft peacetime schedule	27
10	Example of Form 17	29
11	Example of mode 2 preflight to postflight network	31
12	Example of mode 2 preflight to postflight network coding	33
13	Relationship of mode 1 and mode 4 networks	41
14	Example of mode 4 thru flight to postflight network coding .	42
15	Example of alert mission network	44
16	Example of mode 3 network coded with preflight and hangar dummies	48
17	Subsystem corrective maintenance network basic logic	54
18	Data bank printout for VHF radio on-aircraft work	58
19	Schematic of VHF radio network	59
20	VHF Radio network coding	60

. List of Illustrations (Continued)

Figure		Page
21	Data bank printout for VHF radio shop work	63
22	Data bank printout for external lighting on aircraft work	66
23	Data bank printout for external lighting shop work	67
24	External lighting network coding	69
25	Schematic of engine network	72
26	Engine network coding	73
27	Data bank printout for FLR on-aircraft work	77
28	Data bank printout for bombing system special inspections	78
29	Data bank printout of intergrated avionics system CND troubleshoot	7 9
30	Schematic of FLR network	81
31	Integrated avionics FLR subsystem network	82
32	Data bank printout of AFSC 424X0 unscheduled maintenance in phase	87
33	Phase network example	88
34	Scheduled maintenance examples	92
35	Five steps in processing a simulation data base	93
36	Sample DBASE corrections using update	98
37	LCOM input processor file	99
38	Format for LCOM 10 cards	101
39	Sample update entries to supplement an FDATA file	102
40	LCOM run parameters	110

List of Illustrations (continued)

Figure									Page
41	Example LCOM test run parameter cards	•	•	.•	•	•	•	•	112
42	Representative extracts from an analysis of run length test data	•	•	•	•	•	•	•	116
43	Simulation run sequence	•	•	•	•	•	•	• •	117
44	Factors determining daily direct manning requirements for an AFSC	•	•	•	•			•	120
45	Work center matrix	•	•	•	•	•	•	•	122
46	Criteria for rounding in manpower computations	•	•	•	•	•	•	÷	125
47	Example of manning constraint tabulation	•	•	•	•			•	127
48	Regression and Moody manpower programs	•	•	•	•	•	•		130
49	Curve shifting			•				•	132

SIMULATING MAINTENANCE MANNING FOR NEW WEAPON SYSTEMS: BUILDING AND OPERATING A SIMULATION MODEL

I. INTRODUCTION

Why Use a Simulation?

Any model is a simplification of reality. A model is designed to answer a particular kind of question. Once tested and proven, the model can be used to predict and answer rather than having to find out by trial and error each time. The simplifications that are acceptable in any particular model depend on the question the model was designed to answer. The ideal model contains the minimum amount of information to give a useful result.

Mathematical models are the basis of science and engineering work, and are commonly used in many other fields as well. Mathematical models consist of equations. The simplification made in using mathematical models is in the number of variables and criteria that are considered at one time. For example, manning can be computed precisely from a maintenance manhour per flying hour equation: All you need to know is the MMH/FH factor for the airplane and the number of flying hours. The drawback of using this model is that maintenance manhours per flying hour is not really a constant (Donaldson & Sweetland, 1968). Variables other than these two determine the manning that will actually be needed in a given situation. The unit size; the takeoff pattern; frequency of turnarounds; and the sequence in which jobs by different specialists must be done; all effect where bottlenecks will occur, and the number of people required at particular times to overcome them. Information needed to answer questions about required manning and the support resource mix under specific operational conditions cannot be adequately handled in a single equation or set of equations.

Many people are not aware that mathematical equations are not the only kind of available model. Simulation models utilize the tremendous speed and storage capacity of modern digital computers to duplicate the complex sequence of events over time. In effect, the answer is obtained by trial and error experience run in a computer instead of in the real world. Simulation is ideally suited to answering complex questions about the manning and resource support mix that will be required by a new aircraft under a range of different operational conditions. However, it is not an answer to everything. Even large computers have capacity limits. The more complex a model, the more costly it is to run, and the greater the chance for preparation error. The principle that nothing should be included that does not affect the answer is just as important in simulation as in mathematical models, or the purpose and essential logic will be lost in a maze of sophisticated trivial data.

Preceding page blank

An Overview of the Procedure

The method described in this report is based on using a Logistics Composite Model (LCOM) simulation (Drake et al., 1970) to predict the manning requirements for a new aircraft. The procedures cover how to build a data base and set up the model logic, how to run the simulation, and how to interpret and use the results.

Figure 1 illustrates the major elements in this modeling process. The maintenance tasks required on the new aircraft are estimated from Air Force experience with similar subsystems on existing aircraft, factored for differences in design. Experience data is obtained from a maintenance data bank, described in AFHRL-TR-74-97(III). The first block in Figure 1 represents use of the data bank programs to obtain comparable data from a number of current aircraft.

The second block in Figure 1 represents the maintenance task and operations scenario data bases that must be constructed for the new aircraft. When processed through a series of translation programs, these data comprise the input to the third block, the LCOM simulation.

The simulation model is iterated until the minimum manning necessary to accomplish the required scenario is determined. In the fourth block, the result of several simulation runs are taken to compute regression curves for direct manning, overhead factors added, and a manning document produced.

How the Simulation Works

The necessary inputs (Block 2) to the LCOM program (Block 3) include: daily mission schedules, defining when aircraft are to fly and for how long; main aircraft servicing networks, defining the tasks, times, and resources to prepare and launch an aircraft at its scheduled time and service it on return; corrective maintenance networks defining the tasks, times, and resources to fix each subsystem when it breaks; failure clocks and derements, defining how frequently each subsystem is likely to require corrective maintenance; and the initial quantities of each resource (aircraft by type, men by AFSC and shift, LRU spares, ground equipment).

Figure 2 is a simplified diagram showing how the program uses these inputs to simulate a sequence of maintenance activities that would take place in an operational unit attempting to fly the specified schedule. When the schedule calls for an aircraft to start preparation for a mission, the computer checks the number of aircraft in available status (those not flying nor in maintenance) and assigns those needed to the mission. Each of the assigned aircraft then begins processing through the appropriate main aircraft servicing network, using the resources needed for the simulated time specified in the task data. The computer keeps count of each resource. For example, when all the load teams are already working on aircraft of equal or higher priority, the loading task on another aircraft will be delayed until a load

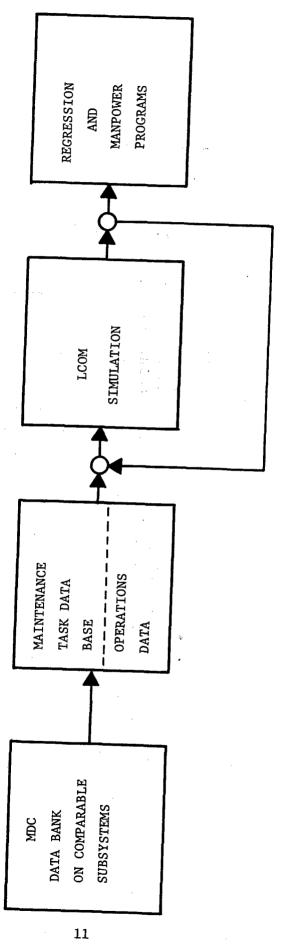


Figure 1. Model development and operation.

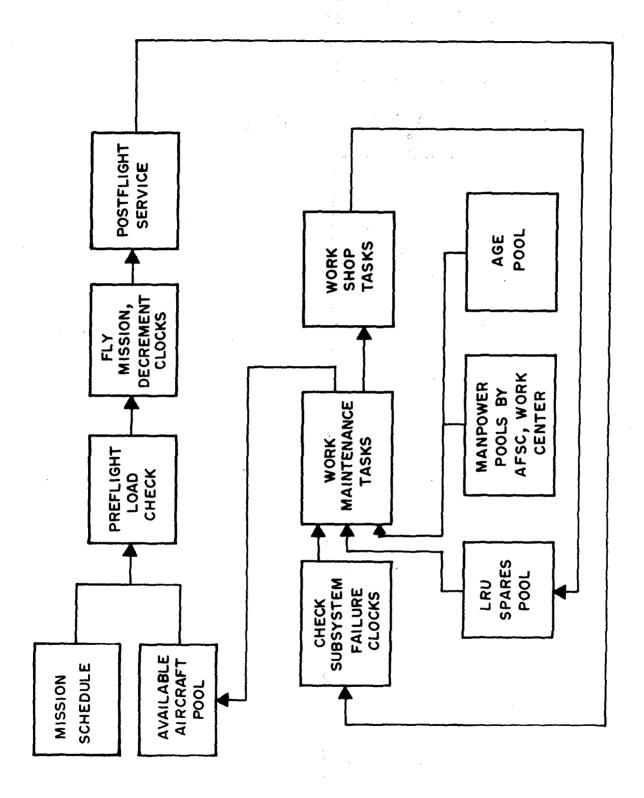


Figure 2. How the simulation works

team becomes available. If enough aircraft are ready to go by scheduled takeoff time, the planes are launched and "fly" for the specified mission duration. At the end of this time, they return to base and process through the post sortie servicing and maintenance tasks.

The program keeps a failure clock on each subsystem. A random draw is made from a subsystem failure distribution to determine the number of sorties until the next corrective maintenance action on that subsystem will be required. Whenever an aircraft flies, each failure clock on its subsystems is advanced one sortie. When the sum of sorties flown reaches the randomly drawn number for a subsystem, the computer lists it as a required corrective maintenance action on that aircraft. The tasks in the corrective maintenance network for that subsystem must be worked off before the aircraft can be returned to available status.

The lower the initial resource levels, the more tasks are delayed, aircraft take longer to return to available status, and fewer missions are accomplished. The extent of the mission loss depends on the timing of the mission schedule and resultant bunching of resource demands.

Relationship of the Input Formats

The hierarchic relationships among input data are illustrated in Figure 3. An operations schedule is contained on LCOM Forms 20. An LCOM Form 17 identifies the appropriate main aircraft servicing network to be processed for each mission type. These networks are entered into the data base on extended Forms 11. Networks define the sequences of tasks to be accomplished and the time and resources required for each task. The main networks also contain appropriate clock decrement and call tasks. Decrement tasks specify when and on what basis subsystem clocks are to be advanced, and the call tasks specify when they are to be checked and any required maintenance accomplished. The corrective maintenance networks and the failure distributions for each subsystem are entered into the data base on extended Forms 11.

The next four sections contain detailed instructions on how to develop and prepare input data. Section II covers the operations scenario (LCOM Forms 20, 17, and 15). Section III describes the main networks, Section IV the corrective maintenance networks, and Section V the phase and periodic inspection networks, all of which are entered into the maintenance data base on extended Forms 11. The methods and formats described have been developed to work with the LCOM program version and related data analysis and data management programs available on the Aeronautical Systems Division CDC 6600 computer. Minor variations may be necessary to work with LCOM versions programmed on other computer systems.

II. DEFINING AN OPERATIONS SCHEDULE

Coordinating the Assumptions

Often, the most difficult step in building an operations scenario is getting agreement on the specific mission requirements. These requirements

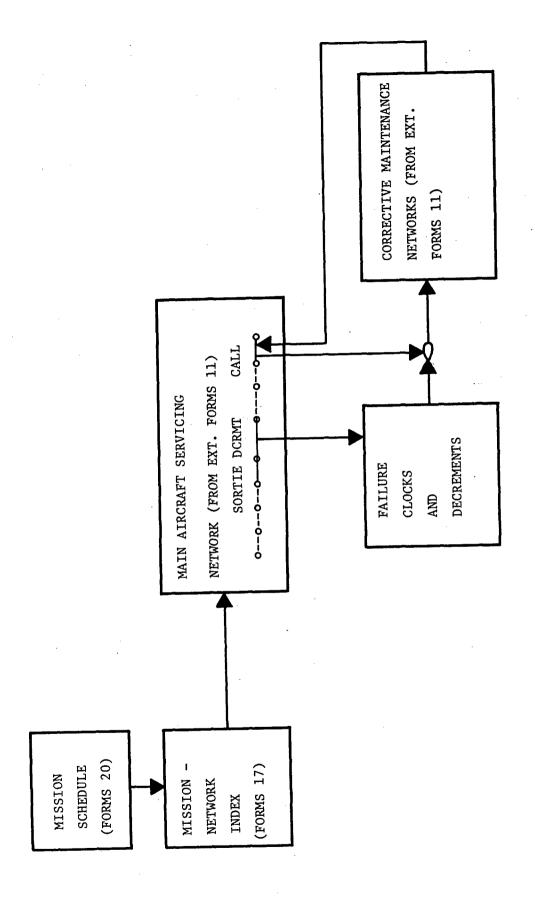


Figure 3. Relationship of inputs.

must be coordinated and agreed to among the decision makers and organizations who are going to use the end results. Few combat aircraft have only a single mission and single possible mode of operation in all situations. Operations scenarios can range from a low sustaining rate of peacetime training flying by a full wing at an established CONUS base, to a round-the-clock combat surge by a single squadron deployed at a forward base. Scenarios must be defined that are appropriate to the decisions and plans that will be made with the model results. The CONUS wing training scenario cannot be used to determine manning for a deployed squadron in combat.

The requirements office in the operating command is a primary source of information on operations plans for new aircraft. The general questions that must be answered to define a scenario are:

Is it combat or peacetime?

How many aircraft are based at the same location?

What level of maintenance is available at the base? (e.g., do they have field maintenance capability, or is that provided at some other "home" base?)

Are there any other aircraft types sharing the same field maintenance shops and facilities?

What is the desired sortie generation rate, in sorties per aircraft per day?

What is the average sortie length?

Sortie rate x sortie length x flying days in a month gives flying hours per aircraft per month. Is this result acceptable?

What are the missions and load types? These should be defined in a mission-load matrix. Consider wing tanks, camera film, gun ammunition, pods, etc., as types of loads.

Which load configurations could be substitutes? (i.e., if a mission requires Load A, but an aircraft cannot be prepared in time, could a ready spare aircraft with Load B be used? If so, B is a substitute for A.)

What proportion of the total sorties does each mission type represent?

What is the average mission length, the desired number of aircraft, the minimum number of aircraft, and priority for each mission type?

How soon after scheduled take-off time will a mission be cancelled if the minimum number of aircraft are not ready?

What is the policy for preparation of ground spare aircraft?

What proportion of the aircraft scheduled to fly per day will be turned to fly a second time if possible?

What is the proportion of day and night flying by mission type?

What is a typical daily schedule (fragmentation order)? Is it basically similar for the entire period to be simulated?

Are all available aircraft that are not scheduled to fly preflighted and available to load and fly if necessary?

What is the variability on mission lengths?

Do any aircraft stand alert? If so, how many and for how long? What mission types fly off alert, and what is the sortie generation rate for alert aircraft?

How many weather days and weather cancellations are likely, and what mission types are affected?

What is the period or schedule for major inspections (Phase, corrosion, gun, etc.)?

Developing a Basic Schedule

The first step is to reduce the number of load and mission types as much as possible. Missions which have substitutable loads, require the same load times and crews, require the same pre and post sortic servicing, and have reasonably similar mission lengths can be grouped under a single mission type, regardless of what they do in the air. LCOM simulates what happens on the ground. Time in the air is just time the aircraft is out of consideration as far as the simulation is concerned.

When the number of missions types are reduced to a minimum, a daily flying schedule is laid out. Schedule the takeoff time of each mission and identify the mission type, the number of aircraft per mission, and whether the aircraft are on their initial flight of the day or were turned after a previous flight. Alert missions are not scheduled. The sortic rate, average mission length, and flying hours per aircraft per month derived from this schedule, plus alerts, must match the respective assumptions. This may require several iterations and adjustments of assumptions until a consistent set is obtained. The computation is:

Sortie rate = Scheduled sorties + Alert sorties

Number of aircraft

The assumed proportion of spare aircraft are added, distributed across the non-substitutable mission types. These spares are put on initial flights. In order that they are not released too early, a proportional requirement for additional spares can be put on turnaround flights. This will hold any spare aircraft not used in the morning for afternoon or evening turnarounds. This method of handling spare aircraft is unique to the ASD CDC 6600 version of LCOM.

The same basic flying schedule should be repeated each simulated day wherever this is a reasonable assumption, since it greatly simplifies preparation of input data on the LCOM Forms 20 (sortie generation data).

Entering Mission Data on Forms 20

Each mission is a line entry on the Form 20 (Figure 4). All missions which fly on the first day have a 1 in column 7. Column 12 will always be 1, since a separate line entry is used for each mission. Takeoff time, in 24 hour clock time, is entered in columns 15 - 18. The aircraft type is entered in columns 20 - 25, and the mission type in columns 27 - 32.

A unique name is given to each mission type. Many missions of the same type may fly on the same day, or even at the same time, as long as each is a separate line entry on the Form 20. Mission types must be further subdivided according to the kind of preflight and postflight processing tasks required. The last digit (column 32) of the mission type identifies the processing mode, as follows:

1 = Preflight to thruflight

- 2 = Preflight to postflight
- 3 = Thruflight to thruflight (also used for first flights when aircraft preflight is scheduled with a separate Form 20 line entry)
 - 4 = Thruflight to postflight

When preflight is scheduled separately from the missions, the preflight task is followed by a dummy "sortie" with a minimum constant "mission length" of one tenth of an hour. This is the minimum simulated time entry for processing with CDC 6600 LCOM. The dummy sortie does not represent any flying but is just a mechanism for scheduling a block of aircraft into the preflight task, and getting it listed in the simulation output statistics. The time when preflight should be completed is entered as "takeoff time" in columns 15-18.

The minimum number of aircraft that must be ready for the mission to fly is entered in columns 34 - 35, and the scheduled number in columns 36 - 37. If preparation of a ground spare is to be shown with a mission, is entered in column 39. For preflight dummy sorties, the maximum number to be preflighted if available is entered in column 36 - 37, and a minimum 2 is entered in column 35. No spares are ever indicated for a preflight dummy.

	<u>.</u>		្រា				_	_			_	_	_		_						7		_			_	1	_			γ	7		- -		-	-	_
l			77 78 79 80		-	H		-	-												\exists	⇉	\exists						コ						1			-
			8/						\Box	\dashv	\Box				L_			Ь			\dashv	\dashv				-	\dashv			\dashv				-	\dashv	7	\Box	\exists
			1/9	_	-			\dashv			-	-	_	_	-	-	-	Н			ᅱ	ᅥ	\dashv	_		\dashv	-1	ᅥ		┪	\dashv	-		-				\dashv
ا یا			75 76										_										01000		20000													コ
2 \$	M	M	7.4			***			***											翻翻																		
Zà		3	2 73	5	999	666	719	5	999	999	999	919		-		\vdash	-	-		-	\dashv	\neg	\dashv	_	-	\dashv	-1	_		— <u>†</u>	\neg			-	-1		-+	\dashv
교장	4	STOP	22 12	ö	6	6	6	6	6	ŏ	ŏ	99		_													\Box								_			
8 5	CYCLE		8	_	Ξ	-		Ξ		-	_									_	4	_	_		_	4			\dashv	_							-+	
≥ 2	٦	INT	698	_		_	_				4			_	-		-	-		-		-	\dashv	_		\dashv			\dashv	\dashv				\vdash	-1	\dashv	-	-
			576		Nest		*****					****			***																	300						
ĚΟ			99	n	3	3	4	3	3	n	n	3									\Box						_	_						\sqcup				_
3 1	YTIG	ова	64 65 66 67 68 69	12000	00000	G0000	erene	Share	100000	25/(0.58)	35000	****	Weeks	95054	39110c	*****	STATES:	200200	i Sililion	VXXXX	18083		****	335633 335633	8000		****				Take							- N
- SIMULATION MODEL INPUTS - SORTIE GENERATION DATA	2		36	I	7		7	Ŧ	7	1	T			98862	TO CANA	(120)	SH KORE	22.00	30201	101144				e locare														
3 3	CANCEL	(E	59 60 61 62 63	_	SH	5 H	SH	S	SH	SH	SH	SH															\Box											\Box
	Ž	TIME	5		-	·	•	•	-	•		٠		L_	ļ	_				ļ	_			_			\rightarrow					<u> </u>			\vdash			
CTION II FORM 20	_	_	9 60	estado.	C (2007)	200000	2008/2018	\$3000 CE	5504335	2000000	8889	000000	30000) (2000)		93000					****	****	3000		***													
2 €	_	_	585	H	H	H	H	Ŧ	I	H	H		coass	WASTER.			20.72.70																					
SECTION II FORM 20	ā	AE.	56 57 58		7 H	3 H	٥	n	SH	7 H	3	34									\Box	_		ļ	\vdash	\dashv		-	_	\dashv		-		┟╌┤		-		
"	LEAD	TIME	35	_				7	•	3	•	•	<u> </u>	-	-			-	-	-		_		-	\vdash	-	\dashv	-		\dashv		├		├─┤				
	_		54 55	7	0	7							****																			***						
		TZIQ	53		Z	Z	Z	Z	Z	Z	Z	Z														\Box				П			<u> </u>	\Box			├	
			52	NO H	H 9	6 H N	王	Ŧ	25HN	6HN	I GHIN	NH9 /	_	<u> </u>	ļ	-	-	-	_	<u> </u>	_			-	\vdash	_				\vdash		-		\vdash			 	
		VARIANCE	40 41 42 43 44 45 46 47 48 49 50 51 52	2	-9	-2	8	1 6	3	7	3	7 /	-	-	+-	-	-	-	╁	-	۲		H	-			\dashv											
Ä	TH	RIA	495	•	-	•	-		**	•	•	•]
MODEL	MISSION LENGTH	>	48															L	_	_				<u> </u>			1		_		_			\vdash	-			
Σ	z		5	f	_	_	_	_	-		_	-	-	_	-	├	-	 	-	 	_		-	-			-		-		 	-	-	H			 	_
	SSIC		15 4(11	40	19 H	8	=	5 H	H9	エタ	H 9	-		 	 	\vdash	<u> </u>		_																		
	Σ	Z	441	•			•	•	•	•	•	•																				<u> </u>					 	
S		MEAN	43	0	-	~	1	-	7		-				 	-	-	-	-	 	_				\vdash		-1					-	-	\vdash				
0			1			-	<u> </u>		\vdash	-			-	-	\vdash	\vdash	\vdash	┢	-	_	_		 	-														
COMPOSITE	М	=	ģ.																																			
0	ωį	MIN MAX SPARE	38 39	0	-		0	1	0	-	~	0	-	<u> </u>	┡	<u> </u>	-	├ —	<u> </u>	-	_	ļ	-	-		_	Н		-	_	-	-	 	-	-	-	 	
	MISSION SIZE	- S	7 38	K	_	7	~	~	-	4	~	~	┝	├-	\vdash	╁╴		┼	╁╌	-	_	_	-	-		\vdash		_										
S	OI N	MA	33 34 35 36 37	-	1	1	ĺ																									_	_				1	
2	SSIV	Z	35	7	1	7	7	7	7	7	K	7	-		ļ.,	<u> </u>	ļ	├	ļ	<u> </u>	<u> </u>	_	-		_		-	-	-	├—	-	├-		-	-	_		لـــا
1 15	Ĺ	×	334	::::::::::::::::::::::::::::::::::::::	3332	383942	2000	eneral Taran	30000	4500 SA		90 A	1000	1000																								
LOGISTICS			323	F	3	3	4	n	7	16AT4	4	4																						Γ_	_			
0		<u>.</u>	5	7	-	S	ড	S	œ	۲	2	A S 4	_		_	<u> </u>	<u> </u>	↓ _	-		ļ	_		 —		 		-		-	├-	┼-	├-	┼	- -		₩-	لـــــا
		MISSION I.D.	930	4	1	15	Z	3	A	3	ਹੋ	ວ	 	┼-	╀	\vdash	 	╁╌	+	+-			-	\vdash		-	-	-	-	 		-		+-	 	1		
<u> </u>		1SS1	28 29	RE	A	1	F	۲		ď	<u> </u>	_	1	1	+	†																						
İ	<u> </u>	Σ	26 27								- O/6								000000	20000	Halling	2000	3000	1 200 200	1 (1 (1 (1 (1 (1 (1 (1 (1 (1 (1 (1 (1 (1	2000	070000	3500	10000	270	1000		2000	1800		! #88008	alleras.	200
1	\geq	\leq	15	K				_				0							4889					1			**************************************			1000	1			1			L	ئىتىتىت ئىسىد
l		AIRCRAFT I. D.	24 25	70	10	12	2	5	5	A7D	-	5	1	T		\perp								匚						\Box			<u> </u>			+	Į	
1	ł	1	23 24	4	4	4	~	⋖	4	A	A	4						L	Ţ.	Γ	Γ_		_	<u> </u>	<u> </u>	<u> </u>	-		-	├-	╀	╁	├-	┼-	-	├	┼	
i	1	S. S.	22	<u> </u>	├ -	-	├-	┼	₽		_	 —	╀	₽	╁	╁—	╂-	+-	╁	┼~	 —	╀	-	╁	┢	├		├	├-	 	+	+	+-	+-	t^-	-	†-	-
Ì		AIR	20 21 22	-	+-	+-	+	-		1	\vdash	\vdash	+	\vdash	\dagger		†	1	T																			-
l	\triangleright	\leq	12																															1			#	
	1	;	18	5		5			3	20	2	2	-	+-	+	-	+-	+-	+	\vdash	\vdash	┼	╁	+	+-	\vdash	+	+-	 	<u> </u>	+-	+-	†-	+-	ļ		1	
	1 3	TIME	15[16]17[18]19	=	2	0 00	282	4	0	53	V	V	'	+	+	+	\dagger	+	\dagger	1													I	1_	Ţ.,		1	Ļ.
1		<u> </u>	15	5	Š	0 W	2	8	1	15	=	Ξ			1000	3 77 77			\$ 5000	0 21 27	211010	96%	3 14100	2 130554	2000	0 (511152	10000		1000	1		9 3338						
1		Ż	1		1	4	H		H	4		H	H	1	4-	H	+	#	H	₩	٠	٠			۳	H	H	H	•	m	۳	Ħ	t					
	\vdash	_	٦	_	-						-	-	-	1000	1	- 1000		2000	400	Ï	eressis L	L		I		Ľ	T	Ľ			Γ	I	I				1	<u> </u>
	NUMBER	OF MISSIONS	0011011111	1		1							I		I	I	I	\top	T	L	L	\Box	\vdash	\perp	1	\perp	1-	1	\vdash	 	+	+-	+-	+-	┼-	+	+-	
1	NO.	SSI	100		Ψ.	4	\perp	ļ_	1	+_	L	+	+	-	+	+	+-	+-	+	+	+	+	+-	+	+-	+	+-	+-		+-	+	+-	+	+	\vdash	+-	-	<u> </u>
i	-	Ź	Š	2																												8						
1			5	-	-	-	Ξ	Ŧ	-		=	Œ	I	I	Τ	I	Γ	T	I		\Box		Γ	Ţ.,	\perp		1	<u> </u>	1	-	1	4	1-	4	+-	 -	 - -	
		DAY	Ž	3	1	\perp	+	ļ	1		 	1	+	+	+	+	+-	+	+-	+	+	+	+	+	┨	 -	+-	+-	╁╴		+-	+	1-	 	t	1	1	1
	-	_	١																																			
	1	VKD I	7	3 2		Ŧ	Ŧ	+	-		H		+	Τ	1	H	Ξ	Ţ	-	F			T	-	1	F	-		-	=				=	E		13	-
1	\perp	× 1 (1/6)			1 -	+	+		+	2 200		22.000	W 200	2 30		0 00	w es							757	. A.Y.									1	F		Ť	1
				51																																		

Figure 4. Example of missions repeated daily.

Mission length in hours, with decimal, is entered in columns 41 - 45, and standard deviation in columns 47 - 52, both right justified. An H is placed in columns 46 and 52 to indicate that the time units are hours. The distribution type is entered in column 53. N indicates a normal distribution. For tactical fighters, mission times are generally normally distributed with standard deviations about ten percent of the mean mission length, although this may vary for specific scenarios and aircraft with loiter capability.

Leadtime on the Form 20 has a unique meaning. It is not the amount of time it takes to get the aircraft ready, but rather the earliest time before takeoff when work would begin to get the aircraft ready. This can never be less than the sum of the mean task times, but must be somewhat greater to account for randomness in the task times and resource availability. The leadtime is entered as hours, with decimal, in columns 55 - 57, with an H to indicate the units in column 58.

Cancel time is the amount of time that will be allowed after scheduled takeoff for the mission aircraft to finish preparation and takeoff late, in the event the minimum number is not ready at takeoff time. Typical policies in tactical units are to allow a half hour to an hour before cancelling the mission, but this depends to some extent on the missions and situation being modeled. Longer cancel times can be used for preflight dummies. The cancel time is entered in hours, with decimal, in columns 60 - 62, and an H to show it is in hours is entered in column 63.

Numerical mission priorities are entered in columns 65 - 66. Priority 1 is highest, and is usually reserved for missions flown from alert. The cycle fields indicate how the scheduled is repeated on subsequent days. A 1 in column 70 indicates the mission is to be flown at the time shown in columns 15 - 18 every day, a 2 in column 70 indicates it is to be flown every other day, etc. If columns 68 - 70 are left blank, the mission is flown only on the day indicated in columns 5 - 7. When missions are repeated 999 should be entered in columns 71 - 73, unless there is a specific day when the repetition cycle is to stop. In that case, the day on which the mission stops recurring is entered in columns 71 - 73. A more detailed explanation of the various Form 20 entries can be found in the LCOM Users Reference Guide (Drake et al., 1970).

Phase and Periodic Inspections

Major inspections that tie an aircraft up a flying day or longer (such as phase or periodics), and major inspections that are done at fixed calendar time intervals (such as 45-day corrosion wash and annual gun teardown), are scheduled on the Forms 20. The inspection tasks follow a dummy "sortie" with "mission length" a constant one tenth of an hour. The dummy sortie does not represent any flying, but is just a mechanism for scheduling aircraft into inspections and getting data on inspections accomplished listed on the simulation output. The inspection dummy sorties are entered on the Forms 20 with unique identifying mission names. In this case, the inspection work

will follow the dummy sortie, so the time work is to begin is entered in columns 15 - 18. Work will not begin until the scheduled time, so a long leadtime can be entered to "grab" an aircraft.

The inspection frequency is computed for the programmed flying hours (scheduled plus alert) and number of aircraft. For example, if there are 72 aircraft, flying 50 hours per aircraft per month, and the phase interval is every 100 hours, each aircraft will require one phase every two months, and there will be 36 phases per month. This is scheduled on the Form 20 as one phase every day, and an additional line entry for a phase every 5 days (5 in column 70). If there are 72 aircraft, an annual gun inspection would come up every 5 days, and would be scheduled in a similar manner.

Entering Alert Missions on Forms 20 and Forms 15


Alert missions by their nature are not scheduled. The LCOM program provides a mechanism for launching a predetermined number of aircraft from alert at different randomly drawn times each day. Instead of specifying a takeoff time in columns 15 - 18 of the Form 20 line entry, an asterisk and distribution number are indicated.

The distribution is then defined on a Form 15 with the distribution number entered in columns 5-7 of the form. Column 9 contains an I (for continuous interpolation), and H is entered in column 11 to define the time units as hours. Cumulative probabilities from 0.0 to 1.0 are entered in columns 13-16, 23-26, 33-36, etc. The corresponding points on the takeoff time curve are entered as decimal hours in columns 17-22, 27-32, 37-42, etc. Figure 5 is an example of a cumulative probability curve of takeoff times for a night alert mission. The periods of greatest activity are from 0300-0700 and 2200-2400. The Form 15 entry for this curve is shown in Figure 6. Note that it can be continued on a second line where necessary.

When preflight is accomplished before aircraft are put on alert, and postflight is done while they are in alert status awaiting a mission, or after they are taken off alert, then 3 will be entered in column 25 for all alerts, since they will all process through the networks as mode 3, thruflight to thruflight. The preflight tasks to prepare aircraft for alert, and the postflight tasks after they are taken off alert, are scheduled as dummy missions with separate Form 20 line entries.

In order to make the program keep aircraft tied up on alert between missions, the average time between alert missions is entered as leadtime in columns 55 - 58. This is computed as the time on alert, less the time flying, divided by the number of sorties flown:

Leadtime = Alert Duration - (Alert Sortie Rate x Avg. Sortie Length)
Alert Sortie Rate

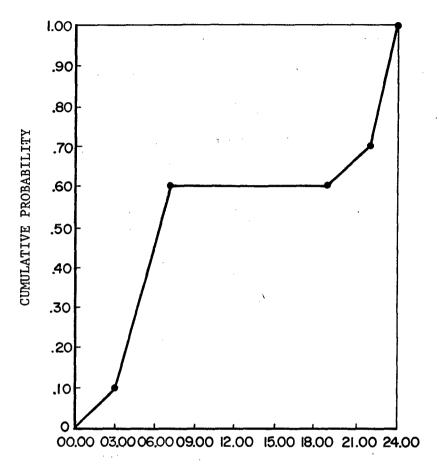

TIME OF DAY IN DECIMAL HOURS

PERIOD OF DAY IN DECIMAL HOURS	PERCENT OF ALERT MISSIONS OCCURRING IN THIS PERIOD	CUMULATIVE PROBABILITY
00.00 - 03.00	10	0 + .10 = .10
03.00 - 07.00	50	.10 + .50 = .60
07.00 - 18.00	0	.60 + 0 = .60
18.00 - 22.00	10	.60 + .10 = .70
22.00 - 24.00	30	.70 + .30 =1.00

Figure 5. Cumulative probability distribution of takeoff times for night alert.

Figure 6. Form 15 for night alert missions.

A sample Form 20 for alert missions is shown in Figure 7. In this example, there are 8 alert aircraft, a 3.0 alert sortie rate, 2.34 hour average sortie length, and a 24 hour alert duration, giving a 5.7 hour leadtime. Aircraft are prepared for alert before midnight. The "takeoff time" in columns 15 - 18 of the "on alert" dummy mission represents completion of the preflight. Sufficient time is allowed for completion of additional processing tasks shown in the mode 3 main aircraft servicing networks so that the new aircraft will be ready to fly at midnight when their alert turn begins. The "takeoff time" in columns 15 - 18 for the "off alert" dummy mission represents the latest time for starting postflight on aircraft coming off alert. The leadtime and "takeoff time" are both set to 4 hours in this example. This allows sufficient time to catch all aircraft returning from late alert flights. With this coding, any aircraft on the alert pad at midnight, and any returning from late alert missions within the next 4 hours, will process into a postflight. The relationship between dummy sortie takeoff times and their associated network tasks is discussed further in Section III.

Scheduling Total Requirements for Combat

In combat all available aircraft are usually preflighted every day, and preflights are accomplished as organizational maintenance mechanics can get to them, rather than at a single fixed time. Under these assumptions, preflight tasks for mission aircraft are entered within the mode 1 (preflight to thruflight) and mode 2 (preflight to postflight) networks. Preflight dummy missions are only required for the remaining available aircraft that are not scheduled to fly, and to bring aircraft up onto alert. All aircraft that fly must receive a postflight at the end of the day. Therefore, any aircraft scheduled for a mode 1 mission (preflight to thruflight) must also be scheduled for a mode 4 mission (thruflight to postflight) later that day. Enough time must be allowed between takeoffs to fly and do all between flights servicing tasks.

Under these assumptions the following relationships must be maintained on every simulated day:

Aircraft Scheduled = (mode 1 missions maximum aircraft + mode 2 missions maximum aircraft + mode 1 mission spares + mode 2 mission spares + phase and scheduled inspection dummy missions + number of aircraft on alert)

Additional Preflights = Total Aircraft - Aircraft Scheduled

Mode 1 Missions Maximum Aircraft = Mode 4 Missions Maximum Aircraft

Aircraft must be assigned to mission and inspection requirements first. Additional scheduled preflights will not all be accomplished, since many of the remaining aircraft will be down for maintenance. To assure that mission requirements take precedence, the preflight dummy missions are scheduled so their scheduled time minus leadtime falls after the scheduled takeoff minus leadtime of the last mode 1 and morning mode 2 missions, but

Figure 7. Alert missions.

before the scheduled takeoff of the first mode 3 mission. An example combat schedule for a 24 aircraft squadron is shown in Figure 8. The scheduled sortie rate is 1.15 (Section II). There are 19 aircraft scheduled per day. Phase and corrosion wash are done on alternate days.

Scheduling Total Requirements in Peacetime

In a peacetime CONUS scenario, aircraft are often preflighted at a fixed time each day. In this case, the preflight can be scheduled separately on the Forms 20, and all missions scheduled as mode 3 or mode 4. In a peacetime scenario, there may not be any alert requirement. Aircraft not scheduled to fly are not preflighted and must be taken out of the simulation with a dummy mission that sends them "to the hangar" for the rest of the day. However, the Form 20 entries must assign the available aircraft against real requirements. If any aircraft are down for maintenance, it is the hangar dummy and not the missions or inspections that should be shorted. The hangar dummy mission is therefore given a scheduled time (columns 15 - 18) such that the scheduled time minus the leadtime falls after the scheduled time minus leadtime of the preflight and any phase or inspections, but before the takeoff time minus leadtime of the first flight. This is easier to do if inspections and phase are entered with long leadtimes.

Under the above assumptions, the following relationships must hold on every simulated day:

Preflights = (Mode 4 first flight to post flight maximum aircraft + Mode 3 maximum aircraft + Mode 4 first flight to post flight spares + Mode 3 spares)

Total Scheduled = Preflights + Phase and scheduled inspection dummy missions

Mode 3 maximum aircraft = Mode 4 turnaround to post flight maximum aircraft

Hangar Dummies = Total Aircraft - Total scheduled

Figure 9 is an example schedule for a 24 aircraft squadron flying a 30 hour/aircraft/month peacetime program, with a 1.8 hour sortie length and resultant .57 sortie rate. Low sortie rates are typical of peacetime flying. For a 24 aircraft squadron, a .57 sortie rate is approximately 14 sorties per day. Assuming 60% turnaround, and 10% ground spare policies, 8 aircraft plus a spare will be preflighted each day, and 6 of these will fly a second time. Since every aircraft that flies must have a postflight, there will be 6 mode 3 and 8 mode 4 missions scheduled. Enough time must be allowed on turnarounds to complete the flight and all between flight servicing and inspection tasks shown in both applicable networks.

Assuming a 45-day corrosion wash requirement, 16 of the 24 aircraft must be washed each month, so a dummy wash mission is scheduled every other

	<u> </u>		6	_		1		1	Т		Т	Т	Т	乛		7	\neg	Ţ			Ţ		J		\Box		I	I								7		٦
			08 62			\vdash	\dashv			\exists		\exists	士		コ		\Box	\Box		\Box	コ	耳	\supset	\exists	1	\exists	二	\exists	\dashv	\exists	\Box	コ	コ	二		二	二.	\exists
	1	ì	2				\Box		\exists	\exists		_	\perp							{		\dashv	\dashv	+	-+	┥	-+	\dashv	\dashv	-{	{	\dashv	{		-∤	-+		-
	1		浧			$\vdash \vdash$		-	+	-+	+	-+	+	-	-+		\dashv	-	\dashv	\dashv	+	-	-	\dashv	\dashv	寸	寸	-+	_			1	一		+	-	+	\dashv
S			75 76			-	-	-	-+	-	+	+	一	7	_		\exists												-		20000							J
SIMULATION MODEL INPUTS SORTIE GENERATION DATA	5	$\overline{}$	7						***							9.0										4											-	
SIMULATION MODEL INPUT		٩		5	<u>o</u>	999	6	6	0	9	9	9	의	<u> </u>	66	5	5	엀			\dashv	\dashv	\dashv	\dashv	\dashv		\dashv	-+	-									
_ z		STOP		9	5	8	ᄗ	뒤	<u> 9</u>	뙸	딌	5	띩	딞	6	66	66	8		\dashv	-+	-1	+	+	\dashv	1		\exists		\Box				口		†		
<u>8</u> 0	CYCLE		70 71	19	त		븬	늭	=	2	=	=	₹	₹	ㅋ			त्र								\Box												
¥ ¥	Ö	INT	ह्रो		•••	Н		-	7				\Box			\Box				\Box			_	_				-+						\vdash				
Z		=	69 89											2022		20000	2002000	355520	0250	111911	0100	33330	77.45	9888		3565	33000		388									
ᅙᄧ	Μ	M	3							_	_			-				7	1000	W 62			3412.07	****	2000	-							:::::::::			2000		3333
E AT	YTIA	ьвіо	9959		וח	ч	4	4	4/	"	•	4	\dashv		7	一	-	•••		\neg	寸	_																
₹ E	-	_	9																		*																	
S S			63	I	Ξ	5 H	SH	SH	=	Ή	=	H	H	H	3	3	SH	=				_		-									-					
1 1	CANCEL	TIME	60 61 62	SH	0	3	S	5	0	3	S	7	S	3	-7	7	47	0		-				-	-	-	-	-1									}	
¤8	1	F	19	0	_;	6	6	0	ત	0	a	0	0	右	0	Ö	0	त	_	\dashv	\dashv	一	一	一	\neg	\neg												
Z∑	$\stackrel{\sim}{\sim}$		59 60	200	200	2000	0000	888 H	80 W S			2898	XXX												***													
≓ő			585	Ξ	3	Ξ	Ή	H	I	耳	Ŧ	X	H S	=	H	Н	H	1				_		_	_							_	├-	\vdash			+	
SECTION II FORM 20	۾ ا	Æ	5	0	0	5 H	S	2	9	3	~	0	3	7	1	Ŋ	0	5		$\vdash \vdash$	-			\dashv		-	1		\dashv	-	-	-	-	╁╌┤	-	\vdash	[†	
<i>v</i> ,	Ĕ	TIME	54 55 56		•	4 •I	•	۱ ۹	•	٩	तं	_	•	-	≓	-	7	0		\vdash	-		-	\dashv		\dashv			\dashv									
			\$5	7	1,	4	7	4	2000				<u></u>		Š	<u> </u>								000														
	M			J	J	2	Z	Z	ی	Z	Z	2	Z	2	Z	Z	J	J			\Box					_			_	_	_	-	-	-	-	-	 	{
			52	ОНО	П	NHO	33HN	3 H N	OHC	3 H N	33 H	Ξ	3H	3 H	50H	H	OH	OH	_	\square					-	\dashv	\vdash	\dashv			-	-		-				
		CE	51	٥	0	0	S	S	9	3	였	~	3	33	8	32	2		-	Н			-			-		-1					<u> </u>	 -	İ			
급	Ξ	IAN I	55		<u> </u>	4	[7]	6	-	3	**4		114	•					-																			
0	NG.	VARIANCE	8			┤╌				-	_																		_		L-		ļ	 	├	ļ		
MODE	MISSION LENGTH		40 41 42 43 44 45 46 47 48 49 50 51																<u> </u>	_					\dashv	_		\dashv	_	_	├-	├-	-	┼─	├─	-	 	
_	ĝ		46	H	11	Ξ	2H	2H	H	ア	H 7	프	프	OH	5	E	IH	1 H	-				Н				H	-			┝	-	-	\vdash	-	-		
띧	MIS	-	45	~	_	0	4	4		a	-	~	9	۲,	_	-		_	-	-		_					-					<u> </u>			1			
COMPOSITE		MEAN	<u>은</u>	_•	-	2	ત	त्र	-•	તં	त	_	d		₹	ત															<u> </u>			↓_	-	ļ	<u> </u>	-
SC	1	Σ	42		-	-	-															L									-	-	-	+-		-	├─┤	\vdash
<u>Б</u>			Ŧ								ero e e			annes).	8825	200000	200000	200000	03:040	888	guirie.	66000	100000	10000	133.463	60000					333							
S	\geq	(پ	휥			-			0		0	0	0	10	0	0	0	0	1377720		(X)(1)(1)	0.000	33,232	2000		2010100												
2	12	¥	38 39	ုဝ	C	1-	-)			$\overline{}$		=	-	-	1															1	L	╀-	↓	<u> </u>	\vdash	_
	MISSION SIZE	MAX SPARE		4	=	4	4	~	2	4	~	7	R	7	7	7	4	_											-		┞-	╁	-	┼	┼-	├-	ļ	
S	ĝ		36 37					1			1					l	-	-	_	-	-	-	 	_	-		-	-	-	┝	╁	+-	╁╌	+	†-	T	1	
2	Ais	MIN	135	4	=	14	14	3	3	7	~	a	7	C	u	-7	4	=	-	-		-	-	-	-		-	-	-		\vdash	1	T	T				
13	L~	Σ	33 34	34/X39	1 1000000		1000		3620				******																									
LOGISTICS			32	K	u	J	-	त्र	-	CAS4	4	4	3	3	3	3	F	SH				L_					-	_	-	<u> </u>	ـ	┼	┼	 	+-	 -		
9	J	Ġ.	5	7	5	را	S	CAS 2	لہ	গ	5	ပ	S	S	SAR	S	LRT	8	<u> </u>	1_			-	-	-			-			┼	 -	 	+	+	 	+	
🗀	1	MISSION I.D.	8	٧	4	: 3	4	X	u	4	A	2	5	4	3	-	-	3			-	├	├-	-	-	-	-	-		1	1	+ -	+	1	1			
	1	SSIC	28 25	3 3		щ	2	10	RE	٦	2	_	¥	ĕ	-	ă	Z	อ	1	+												Ι.	L	I_		L	ļ	_
l	1	Σ	12	ᇹ	-	-	\vdash	+	a	1-	-						8	CWA						L,			2000	22727	10000	-	1 13429	o Dominio	2 2000	1886	S 13765		1000	1000
		\leq	18														1												126					2000			1	
		o	\$125	<u> </u>	XXV	V X	×	AXX	X	×	×	×	×	S	ΑX	÷	AXX	7	}-	+	\vdash	+	\vdash	 -	t	-	t^-		<u> </u>				İ					
		- -	23 24	Ľ		3	12	3	6	4	R	â	F	P	a	†á	4	Á	1								L				L	\bot	1	\perp	1	1-	 	i
!	1	RAF	2		Ť		1-	T									I			\Box			1	-	1	L	 -	—		-	+	+-	+	+	+	+-	+	-
!		AIRCRAFT 1.D.	20 21			\perp	\Box					L	ļ	1	1_	 	↓_		4	+-	-	+-	+-	-	\vdash	┢	-	+-	+	+	+	+-	+	+-	+	+-	+-	1
İ	_	<u> </u>	18	190		F 0200	2 2000	3 (3) (3)	3000	20000	90000					888	2 2000																					
1	1	\leq	6181	12	1) C	10	30	0	Y	5	C	_	~	ī	[-	- C	C	>	T		Ι								Г	I	\bot	\perp	4	1	4		<u> </u>
		TIME	E	1	3 6	0 4 0 0	-	- 10	Š	4	- V	m	*	*	×	. 7	7	7 19	7			\Box	L			1	1	4-	 	╁	+	+	+	+-	+-	+	+	-
	:	TIME	13/14/15/16/17	9		9 (0	o ><	ā	ر 4	4	4		\perp	\perp	Ĺ	22	12	2	-	-	+-	+-	-	+	+-	+-	+	+-	+	+	 	+-	+	+-	+	1	
1			ľ	15	2	> <) <u>C</u>	2 (, C				1	1																								
1		\prec	F		₩	+			+	+		†	†	Ħ	1	t	1				1														4		4	
			10		-	- -	-		-	-	-	-	-	-	E				1	oxdot	$oxed{\Box}$	F	\perp	+	4-	<u> </u>	 	1-	+-	+-	+-	+	+-	+	+	+	+	+
	NUMBER	OF MISSIONS	E		I	工	I	I	\top			igspace	1	1	+	+	+	+-	+	+	+-	+-	+	+	+-	╁	+-	+-	+-	+-	+-		+-	+	+	+	+	t^-
	1 3	OF ISSI	1		F	+	1	+	+	+	+-	+	+-	+	+	+	+	+	+	+	+	+	+-	+-	+-	+-	+	+	+	1-	1-	1	1		土	1		
-	F		Lithorioolog																																		4	1
1	-		- 15	<u>:</u> [-	-				-	-	-	1=		-	-[-		==	. 6	4	\bot	I	I	\perp	1	<u> </u>	1	\perp	1	1	+	+	+			-+		+	
1		DAY	770/30	3	1	I	工	I	I	1	\Box		L	\perp	\perp	1	4	+	+	+-	+	+	+	-	+-	+-	+-	+-	+	╁-	+-	+	+-	+	1	+	1-	1
	_		1	4	22.00	300 C	100 miles	(2) (32)	23 22 22	95 57000	V 250.		9 10000	2 1000	9,500	() () () () ()				S 1888													1				1	
1	12		7	2 0	5 -		200			34 W	1000				20 72.5	3.433	202	1	-10 21-2		1		1	I	-	E	\equiv	-	+	Ŧ	-		-	=	-	1	12	
1	'a	ARD I.	ા ક	300	۰ ا	4	1	_	+	+ -	+	+	7	 	+	7-	+	1	-	+=	Ŧ	£			1	#	_	1	1	1	J .,			7=	7	7-	-	

. **.**

Figure 8. Example of a 24 aircraft combat schedule.

	_		1	8	7		7	7	7	Т		Т	Т		_			_	ı.	г	_	T	Т	η_	T	Т	$\overline{}$	—	Υ	γ-	γ				_		_		
	-		f	₹	+	+	+	+	+	\dashv	\dashv	+	+	+	_		-	٠		 	╀	+	+	+-	╁	+-	╀	┼	-	╁	-	╂	+	+	1.	1	L	L]_
	-		Ē	<u> </u>		I	1	\Box		\Box	ユ	I	\Box									\top	1		†	 	t	┢	H	†	+-	╁	╁╌	╁	+-		╁-	┧	-j
1			ľ	辶	+	4	4	\dashv	4	_	4	4	4	_								L	L	I	L					匚			1	†-	+	+-	-	·	
15			Į,	<u> </u>	+-	+	+	\dashv	+	+	+	+	+	\dashv	-				<u> </u>	⊢	↓	\perp	-	╀	╀	<u> </u>		ļ	ļ	L		\Box		I			1-	1	+
INPUTS	٠,	><	ď					200	828 N	we fo					827	33 A	Sala	800	34888	1000.00		S 1330	A VESTE	1 1 SHR		- COSE	1000		entre	000000	515552		1 5-77	0 0000	1			ľ	
Į ž d		T	ş	0	He	, C	F	5	3	5	5	5	,	5	6	6						1	200000			120000	8998	1	3302							-		١.	1.
_ z		STC	33	à	7	700	7 (7	٠,	5	77	6	7 (6	5	6							1_				T		-	T	1	 - -	╆	+-	+-	+-	+	-	
1 8 9	2	<u> </u>	٠.	0		7 0	7	<u> </u>	2 (7	7	7	5	9				_				L	$oxed{}$										上	1		İ	+ .	†-	+
104	1 8	⊢	0	-	-	- 6	Α.	7	۲.	7	7	Ŧ	7	7	4	Y					ļ	1	├	ļ.,	┡	_	<u> </u>			Ļ	<u> </u>	L	L	L	L	I	<u> </u>	1	1
7 5		I E	67 68 80 70		+	+	╅	+	+	+	+	+	+	+	+	\dashv	\dashv	\dashv	-		1	╀	┼-	┼	├		H	Н		-		┼	 —	╁	┼-	 		ļ.,	L
一直無		\leq	Ţ													***					W.													1000	100		• •	٠,	4
SIMULATION MODEL SORTIE GENERATION	T.,	ьвіов	1 9	4	2 (3 6	ŋ s	7,	₹ (7 (V	7	٧,	7	7	5				.,											-				3300	1	•	٠	+
13 🖺	-		13		3 222	92 990	00.00	200 S25	0.7		00000	200	33,100	929 20						70															1	1	<u> </u>	- -	
≧ ŏ		_	, 63 63	-								4		-																									1
0, 0,	1 3	TIME	62,6	V	7	C 3	5 0	0 1	ã√	7 .	7	Ħ	ลีเ	7	5	<u>ज</u>	-+	-		-	-	-	\vdash	-	-					_		-		 	 	╁	<u> </u>	<u> </u>	∔
۵ ا ا	1	TIME	1		4	•	•	•	•	•	4	•	٠	•	_	-	+	+	7			H	_			\dashv							-	┼-	-	+	├-	┼	· -
ZS		<i>)</i>	1909	2	2 5	(0	54	33	3 C	S	5 C	3 (3	2	7	0									1								\vdash	1	 	+-	 -	†	+-
SECTION II FORM 20	2	\leq	5										20																										
12 5	1.	. ω	57 58	끊	7	2 2	7 (7 2		[=	\ <u>-</u>	(°	1) (H,	_	+					ļ		-			_	\dashv	_				L_	L					Ĭ.
1 2	1	TIME	38	<u> </u>	\vdash	7	+		10	*	+	15	ᡟ	+	₹'	*/	+	+	+	\dashv	-		Н	$\vdash\vdash$			-		-						+-	├ -	ļ	ļ	Ļ.
[L		55	C	7	حـ ا	6	(2 6	70	(14	חכ	วุ้ -	-	3	a	\dagger	+	Ť	\dashv	-			\vdash			-	-+	\dashv				-	\vdash	-	 -		 	ļ
1	\triangleright	\leq	54				1		3000		8 183		88		888		XX 8	*	***			****																	
	1	TSIG		<u>೨</u>	<u> 2</u>	ਹ ਸ ਹ	2	7	13	12	13	3	47	2 9	י ני	<u>ی</u>	_	\supset	\perp										\Box									فننخ	1
1	1	ш Ш	47 48 49 50 51 52	HO	=		5	32	55	걸근	3 =	3 2	0 5	<u> </u>	豆 : つ c	₹.	+	+	-+	_				-	_			-1	_										
		VARIANCE	505)	~	+=			1	-6	Œ			3	7	4	+	+	\dashv	-				\dashv	\dashv	-	-+	\dashv	-							ļ			<u> </u>
MODEL	MISSION LENGTH	Æ	49			1.		•	•	•	•	•	•	•	†	+	1	+	+	\dashv		-	\neg	ᅱ	-+	-+	+	-	-	-		-	\dashv				 		÷
0	I S	>	48															\perp	工	士			士			1	\dashv	$^{+}$	-	-		-		-	-				
2	Z	<u> </u>	5 47		-	ļ_	<u> </u>	_	┵		4_	<u> </u>	<u> </u>	_			_		\perp	\Box		\Box		\Box				\Box									1		
ш	SSI		38 39 40 41 42 43 44 45 46	IH] -	10	1	12	=	16	I O	1 2		5	5	+	+	-+		-		\dashv	\dashv	_		\dashv	-	-		_		_						
=	Ξ	2	44 4	•	-		•] ~	1		-		#		•	+	+	+	\dashv	\dashv	\dashv		\dashv	\dashv	+	\dashv	+		\dashv				-		_			-
SITE	i	MEAN	43				_	-	1=	-	-	-	-		\pm	1	\perp	+		-	7	一	\dashv	1	_	\top	+	+	-+	-	{						<u>—</u> ;		-
0	i i		42			Ĺ		<u> </u>	oxdot	_	\Box			oxdot	T			I	\perp	\Box	\Box								⇉	T	7						-+		t
4		\Box	4	3000000	76.44.50 20.45.50 20.	0000000	No.	3000	42000	2 000000	: distan	1 2 1 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2	3165500	2 000	1	20000	986 227		200				100 to 100 to						\perp										
COMPO		E E	9 4	0	0	O		6	7	2			C	1	₹2	51 51	2 8	<i>20</i>																					
ပ	SIZE	SPARE	38			-	 	╁▔	+=		╁	+-	~	1	+	+	+	+	+	+	+	+	-	\dashv	\dashv	+	+	+			-+								·
	z l	×		σ	4	-	7	7	7	7	17	n	n	(=	4=	=	+	\top	\top	7	+	1	_	-	-	+	+	+	_	+	-+	-+	-		-	-	-+	_	
LOGISTICS	MISSION	MIN MAX	36 37	. 1	_			1 .	Π			П	I	Т	I		I				ユ																		
_	MIS	Z.	34 35	7	K	_	d	12	10	R	u	7	u	1	¥-	‡	\perp	\perp	Ŧ	1	\Box	\Box	\Box	\exists	\Box		\Box	\Box	T	\Box									
ST	$\vdash \prec$		읈	1000	880ZE	S20000	23:520 23:520	1854E	100000		1000	1000	2020	1000	0.00	24 658	SE 1993	non nec	SS 533	2000	- PAGE 12	0000	X2342.30	2000000	user es	00000		200	2000							į			
=				œ	-	Ξ	~	~	3		4	-	7	ш	i		900	<i>344</i> 733	30 1 00		-		-	3380)			4					-							
0	!		ਜ਼	A	1	SH	W	F	GAT	54	F	F	7	3	a	4	+	+	+	+	十	\dashv	+	+	+	_	+	+	+	-+	+	-†	-+	\dashv	+		+		
	,	•	8	B	F	A	ဎ	⋖	Ø	4	4	A	Z	4	7	>				1						\Box	I	1			\top	\top	1	1					
	G a lacatoria	į,	28 29	Z	Ä	CMA	Α	9	9	BFCAS4	9	7	2	=	2	<u> </u>	4-	_	4	4	4	_	4		\perp		I	T	I	I	I					i			
	2	Ē	272	¥ H	2	ย	-	<	-	20	3	-	F	0	. 4	9	+	+	+	+		-	-	+	\downarrow	-	1		4	-	4	-	4		-4	<u>. i</u>	<u>.</u>	_	
ı	\blacksquare		হ								1888												388 B						20. 20							1000	ere de	000	areten
- 1	,		2	×	×	×	×	×	×	×	×	×	×	7	×	4	7	T										***	30483		S) Sec. 477								
	A TOTA OF THE		2	¥	×	×	×	×	×	AXX	×	×	×	×	Z	٢	L	I	\perp	\perp								\top			1		\exists					1	
1	45.	1	223	4	<	4	<u> </u>	4	4	•	V	4	N.	7	. <	٩	╀	+	4	4	+	4	\downarrow	4	-		\perp	\perp	1	1		Ţ	\perp		T	\Box	1		
1	0, 20	ŀ	18 19 20 21 22	\dashv	\dashv	\dashv				-		-		-	1	╁	╁╌	+-	+-	+	+		+	-	+	- -	+	+	+	+		+	\dashv			-		∔	\dashv
l	7		Ŕ	7	_	寸			-					 	+-	+	+	+	+	╈	+		+	+	+	╅	+	+		+	-+-	+	+	+		+	-	-	\dashv
[\geq	M	6																										f										
	FF		<u>=</u>	9	9	0	9	b	0	٥	0	0	0	0			L	I	\perp	\perp	\perp	\perp	\perp		\Box	Ι			T				T		الانتانة	-	سنهنات (چيند ا	~
	TAKEOFF	TIME	#	#	9	3	2	=	7	35	ū	4	5	5	7		╀-	-	4		\perp	_	4		4	4	\perp	\perp	_[_	Ţ.	\bot		T			ļ.			=
İ	T.A	<u> </u>	15 16 17	6	9	80	ö	Ö	0	260	=	15	1 5	Š	70	-	╁	+	+	+	4-	+	-		+	+	\perp			_	+	+	\perp			\perp		i-	
ı	eg		13 14															7 (M)				HI S	**			*							33433						333
ļ	_	\geq	2																						T	7	T	Ť			7	Ť	+	*	7	-1		+	
ļ	ER.	2	08 09 10 11 12	-	_	_	-	_	1	1	I	1	_			•	1	\perp	\perp	工	T	T	T	T	T	I	T	T	T	1			Ï		I		I		
- 1	NUMBER	₽	5	-+	\dashv	-+	-1				-				ـ	-	╁-	+-	+-	+	-	+	+	4	-	4	4	4	1	4	4	4	4	4		_		4	_
į	ž	MISSIONS	8	\dashv	-+	\dashv	\dashv	-			\dashv			-	+	\vdash	╁	+-	+	+	+	+	+	+	+		-	+-		+-	4-		-+-	-4-	-1	-+-	- ‡-	4	-1
t	\geq	⊴	ĕ			X													38			SM 311								33 SE		28 27.	38 3	98. S	+		d		33
· [·	. T	ò	耳	Ξ	=	=	=	-	-	=	1	-	7	7	<u> </u>	Γ	Ι	Τ	T								J				1	7	7			7	7	7
1	74.0		05 06 07	4	\dashv	_	_		_]	\Box	\Box	\Box			匚		Г	\Box	I	I	1	\perp	I			1_	I	1	T	1	1	1	1	\Box	1	1	_1-	1	
ŀ	<u></u>	7	0	2001		302	2603	#800AP	(22,028	99.000e	853.57	(10)(00)	33000c	300000	erises	23:30	8 8 000	M 20052	15 Paris	W 200	200,000	23,000		522 222		931 (300)						$oxedsymbol{\Box}$	Ţ		T			I	
ł	.,,,,,		3	<u></u>			9999	(200) ES	458,634					44.6												4	44	1	1	4-		4			4	4.	4.	با.	4
1	0.16	BAD	ဗ	~	_	_		_	_			-				f =	F	-	-	-	Ŧ	Ŧ		F	- [:	F	Ŧ	1	Ŧ	∃ =:	7	₹	3			3	7	Ξ	\exists
[\geq	\leq	5E																										1		1		ქ~	1	d	+		7	7
										_			_	_	_	_		_					غيمس		_	-	-				_	-	-				-	-	كسيير

Figure 9. Example of a 24 aircraft peacetime schedule.

day. Assuming a 100 hour phase requirement, each aircraft must go into a phase every 100 days. This equates to a phase on 7 of the 24 aircraft each month, or one phase approximately every 4 days. Washes are scheduled on odd days, phases every other even day. Using the relationships shown above, there are 10 aircraft scheduled per day out of 24, so 14 hangar dummies are needed. Every fourth day there are only 9 aircraft scheduled (no phase or wash) so one more hangar dummy is added.

Network Entry Points on Forms 17

The Form 17 is an index that tells the computer where to go to find the appropriate network to process for a specified mission type and mode. All mission names appearing on the Forms 20 must be listed in columns 5-10. Real missions are listed first, then dummies. The mission entries are numbered in sequence, beginning with 1, in columns 12-13. The appropriate network entry **node** is entered in columns 15-20. (These are explained in Section III). Several missions may have the same entry **node**.

Wherever an aircraft loaded for one mission can substitute as a spare for other missions, they are given a common spares substitution classification in columns 22 - 27. The substitute class is a feature of the ASD version of LCOM allowing aircraft that have missed a mission, or spares prepared but not flown, to serve as spares for other missions in the same class without further preparation or loading. Figure 10 shows an example Form 17 to match the missions scheduled in Figure 9.

Additional Scenarios

.....

Once the basic scenarios are completed, variations in sortic rate can be produced by proportionally reducing or increasing missions of each type, and adjusting the dummies accordingly. At least 2 such variations are needed off each basic scenario to produce a full set of simulation runs.

III. MAIN AIRCRAFT SERVICING NETWORKS

Content and Data Sources

At this point it would be a good idea for the reader to go back and briefly review Figure 3. The Form 20, described in Section II, specify when missions are to be flown and the preparation leadtime. This controls when servicing and maintenance jobs must start. The task sequences, the resources needed, and the time it takes to do the work are put into the model in network format. These next 3 sections discuss how to prepare networks.

The main aircraft servicing networks cover work done by the organizational maintenance squadron and the munitions maintenance squadron load teams in launching and recovering aircraft. They also include certain scheduled inspections and service work by other specialists that is regularly done in conjunction with preflight or postflight inspections.


arker jack

Figure 10. Example of Form 17.

Maintenance data collection (MDC) data on similar systems is not much help in modeling munitions loading or crew chief work. Work unit codes for this area are not detailed enough, and the level of reporting is not that accurate. The operations concept for the new aircraft is a better starting point. The requirements office at the operating command head-quarters can assist in translating an operations concept into specific assumptions and task sequences. For example, do aircraft have to be towed into shelters when they land or do they taxi to revetments? If towed, will three man or five man tow teams be required? If they taxi, who guides them in and parks them? Taxi time and maintenance man's travel time could depend on the distance revetments are dispersed. What kind of fueling facilities will be available? Will aircraft taxi right to fueling pits, or wait for a truck to come around during postflight?

Visit an organizational maintenance squadron at a base flying aircraft of the same type and similar mission, and discuss in detail what they do, who does it, and in what order (Figure 11). Aircraft servicing tasks and sequences tend to be generally similar in the same command, and more so for aircraft flying the same type of missions. The preflight and postflight technical orders (checklists) for similar aircraft should be reviewed for similarities and differences with the new aircraft. The time estimates obtained from experienced line and crew chiefs on similar aircraft can then be adjusted for these differences, to get task estimates for the new aircraft. Published munitions loading standards can be a useful data source where loads, release mechanisms, and loading heights are comparable. Again, judgment must be used to factor for identified differences. Many safety standards and policies will apply across all aircraft in a command. A detailed review of the 04 series of special inspection work unit codes listed in -06 technical manuals for aircraft of the same type can suggest many inspection tasks that may be applicable. Service and inspection requirements identified by the contractor should be evaluated and included. However, contractor task times and crew sizes usually depict touch times rather than the time people are tied up on the job, and their crew sizes may not reflect actual practice. Experienced maintenance technicians from the operating command who have had a chance to observe maintenance on prototypes or test aircraft are a good source of information and more realistic estimates.

The access necessary in order to do each task should be analyzed as soon as mockups, prototypes, or test aircraft can be seen. Access is peculiar to the new aircraft design and cannot be identified from data on other systems. A-10 manning requirement was reduced by providing an easier way to get an engine oil sample during postflight. This change was made at an early mockup review before the design was firm. Main network tasks should be given a lot of attention because they can have the biggest impact on manning. Servicing and inspections are done every time an airplane flies. Cutting one man off a maintenance crew or saving time by an easier access, can have a big payoff in the manning that will finally be required.

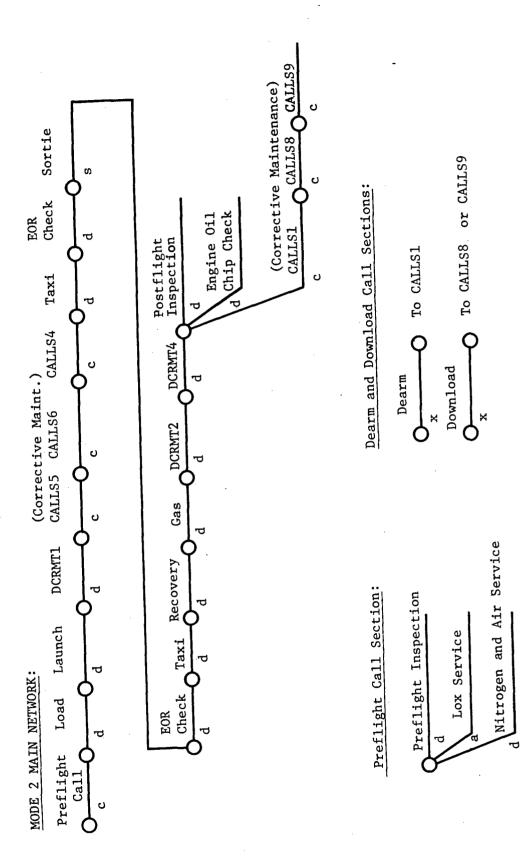

, 35°C

Figure 11. Example of mode 2 preflight to postflight network.

Coding the Networks

A network names the tasks that have to be accomplished, and shows the order in which they are to be done. It also identifies the time and resources needed for each task. Nodes or connection points specify the task processing sequence to the computer. However, every task does not always have to be done in the same sequence. Doing a task can be made contingent on a probability or on the occurrence of some other simulated event.

Network data is entered on an extended Form 11 (Figure 12). The task name goes in columns 12 - 17. Column 12 is a code identifying the action type. Task action codes used for main networks include:

- B = Loading or downloading.
- G = Fueling or defueling.
- H = Inspections, servicing, scheduled checks.
- J = Aircraft handling and moving.

The rest of the field (columns 13 - 17) is used to complete a unique name for each task. In addition to the codes listed above, there are some special task names reserved for specific uses:

Z00000 = Flying a sortie.

CALLS1 = Interrogating the unscheduled maintenance failure clocks and processing through the applicable corrective maintenance tasks to fix anything that broke.

The starting node number is entered in columns 5 - 10, and the next node number ending the task is entered in columns 19 - 24. This ending node is entered again as the starting node (columns 5 - 10) of the following task. When no more tasks follow, the ending node is left blank. Node numbers must be unique. If the same number is used on nodes in two different networks, the computer will not distinguish any difference, and will run all the tasks they connect through both of them. This causes all sorts of errors in the simulation. A systematic node numbering scheme by network will reduce the likelihood of such an error. Under the scheme recommended in this report main network nodes should be four numeric digits preceded by letter J.

Task processing logic is specified with a selection mode in column 26, followed by an appropriate parameter in columns 27 - 32. Selection mode codes used in main networks include:

A = Non-mutually exclusive probability. The task will be done the indicated proportion of times and if not done the tasks that follow from it will not be done either. The probability is entered as two digits right justified, without any decimal point. A probability of .2 would be entered as 20 in columns 31 - 32.

	_	oiteunitno			I	工		T	T	Γ	Γ		I	I			I
			5	-	╀	╀	╂-	╁╌	+-	╁	╀┈	┿	+	1	\perp	Τ.	工
			1		上				Ŀ				1	1	十	+-	┿
			F	<u>:</u>	Τ-	\vdash		1	 		igspace	$oxed{\Box}$	T		工		
			44 40 70 71 23 72 72 72 72 77 77 77 77	;	1	+-	\vdash	╁┈	+-	+	\vdash	┿╾	+-	+-	+-	+	+
			Ŀ										1		\perp	╁┈	十
		,	3	:		2		Γ	-			oxday	Ę				
				;}	┼─	DE		┼	10	 	├-	┿	ᅷ	: 	-	<u> </u>	ļ
		AFSC ,	ŝ	†	┼~	18	-	╁╴	E		╁╌	+	1 2		+	╫	+
			3	E		1			 								1_
		2			┼	 =	<u> </u>	┼	1	-	-	 _	-	‡_			
			3	H	┼─	┼		1		├	╀─	┼	┼	+-	┼	╄-	-
		AFSC / AGE	3 53	نـ	\vdash	t^-	AR	Ŕ	1	 	-	+-	┼─	╀	+-	┼	\vdash
		5	3	1		0	⋖	A	_		Ē		E				
		A A	3	F	├	9	2	S N	Σ 7	├	<u> </u>	ㅗ	F	4	┼	<u> </u>	┞-
		z		Pøs	_	+=	=	=	1 -		┢╌	┼		-	┿	┼	╁╴
		=	18	8	<u> </u>	=			0	=		1	W 0		\perp		Ō
		94	9	厅	 	×	X	×	7	×	-	+-	I N	 	+	+-	12
		AFSC / AGB	8	Ė		3	3	3	<u>.</u>	3		+	3	1	1	+	13
			100	7		4	4	7	4	4			4		匚		446270
			Ž,	TH	-	=	Z	K	4	-	ļ	<u> </u>	4	1_	<u> </u>	<u> </u>	4
		eqyI . faid	5	1	_	7		1		7	 	+-		+-	+-	┼~	-
				프			0	0	0	57			0				정
		*.\$	48 49 50	PRE	<u> </u>	त	R	7	=	N	<u> </u>		=	1			=
			67	岩	├	و.	ĸ	R	5	00		-	-0	-	+-	-	00
		s 2	3	1 1		M	•••	7,7	=	-	\vdash	 	16	-	╁╾	╁	<u>~</u>
		HOURS Tenths	43 44 45 46	K													
		₹.6	4	2	<u> </u>	\vdash						ļ	-	<u> </u>	-	-	
			42.4	AARZ					-			-	 	-	-	-	-
		Missiri					_	=	=	_	-	_	_	=	-	=	=
		Release Type Task		\vdash	3	3	3	3	3	3	3	3	3	3	3	3	3
		4.50 04	39		0	0	0	2	٥	۵	0	0	0	0	0	-	5
			33 34 35 36 37 38		7	-	_		-	~	_	=	=	-	-	2	00010
		NCLOK Clock No	8		00	0	D	oo	Ø	0	٥	0	p	200	0	0	0
		NCLOK Clock N	3		9	9	00	90	00	9	0	00	00	2	00	0	2
			8	_		_	7	_	-	_	=	_	7	-	~	12	7
				\Box			0										
		ISBF or	28 29 30 31 32				4			_				ļ			
		SBF	읪	\dashv	\dashv	-	_	-	-	-		-				_	
		MSI	28														
		sel. Mode	흮		_	\rightarrow			_					_			
		- L-M .142	딁	=	ਹ	4	Y	9	9	9	9	ಲ	×	೨	×	ں	×
			26 25	_	n				3	7	S	ع	-80	2	6	00	
		Š	8	\Box	0	\Box			0	0	O	Q	S	0	Ś	0	5
		2	-	\dashv	5000	\dashv			0	0	0	0		000		00	=
		×		_+	न	_	-+		H	റ	Ħ	ñ	7	न	A	긁	¥
		Pour txe		\Box									ਹ		ਹ		ਹੋ
			틧		~							-		_		\Box	لے
			1 9 10 11 12 13 14 15 16 17	\dashv	23		<u>S</u>	S	R 4	EN6ST	F	55	7	S	10	54	BDEARM
		3	1	寸			X	ď	8	اف	Ī	<u> </u>	BDWNL	7	Z		LLSIA BDEAR
		₹	*	\dashv	~	~	Ø	NAR	0	Z	œ	ALL	3	AL	DWN	7	呵
		TOA	=	\dashv	V	4	싚	픞	굶	쀺	DCRM.	등	윘		8	V	쇴
	=	- 1J4	닭	\dashv	쒸	\dashv	ᅱ	-	-	끅	귀	쒸		ગ		킥	쁴
		-	2	二	彐	2	ന	3	R	m	4	Ŋ	2	3	3	7	5
	3 2	Ď	•]	4	9	-1	1	اب	J0002	0003	000	9		8	S	000	থ
7	7	2	-	\dashv	00	17	#	-	읭	읭	응	9	긤	윙	크	읭	-4
ž	8	Prior Node	•		5	~	8	A	5	5	5	5	ã	5	A	5	⋖I
=	EXTENDED FORM		_	\dashv	\Box	ਹ	ਹ	ਹ	\Box	\dashv	\dashv	\dashv	ਹ	7	ਹ	二	-77
-	4	+	-	\dashv	\dashv		-+	\dashv		\dashv		$- \downarrow$	\dashv		\dashv	-+	
<u>_</u>																	
INPUT No.	ĘX		-		\dashv		7				7		$\neg \dagger$	\neg		\dashv	7

Figure 12. Example of mode 2 preflight to postflight network coding,

v	oiteuniteo	10	$\neg \neg$									1					
		1			_												
	1	SE.						\Box]		
		1															
		াহ					B 4						_	_			
							<u> </u>				_	_					
		1					_									_	
		12								-+				_		-	ŀ
•		اعا.															l
	9															, ,	
	:	. 2					0		_			_					
	3	3					-9					84					
		(3				∤	A			-+		-		\dashv		Щ.	
		49											-	—	_	-	8
		3			_		-			-							Ą.
		13				$\overline{\alpha}$	3							٠			AFLC-WPAFB-JAN 74 500
		43		æ		-	×					~				_	7
	į.	3		_			7	 i	1			9					¥4.
				3		3	7					ā	\dashv		<u> </u>		į
		-		4		7	4										¥
		18		त		_	_		 								l .
		150				0			_	-+		_			_	<u> </u>	ı
	2	ř		62R0		7	×	×	×		\dashv	×	32X0		,		1
		: 		굯		7				-+		-	ন				Ī
	:	<u>۳</u>		6		-	3	3	3			M	3				1
		1		7		462R	4	4	+			4	4		Т		i
		13 14 15 14 15 14 15 14 15 14 15 14 15 14 15 14 15 14 15 14 15 15 14 15	$\vdash \vdash \vdash$	7		7	<u> </u>		243	一			=				
		2		•••													Ī
	eqyl . isi	a =	7	-1		7	J		_1				1				I
		2	16	767		ь	9	6	29			6	Ь				ı
	v.	20 30	ヿ	N		N	7	N	~			Z	7		_	L	ļ
		1													<u> </u>	<u> </u>	ļ
		47	7	_			2		N			37	3				
	5 2	3							 -ŀ			60			<u> </u>		ļ
	HOURS	44 45 46						-	<u>-</u>					_	<u> </u>	├ —	<u>=</u>
	¥:	43 44 45 46													├		15
		3								-			L	Ι—	├	├	ł≌
	Yijoii	Ç	-		_	_	_			-	_		_	=	=	=	1≧
	Ype Task	4 5	1	_		3	3	3	3	3	3	31	3	3	3	3	1
										4.70							1 ==
	05D910	1 8	3	3		- 1.7	7.7		ניי	(3	-113	(')	•••			í	Š
	05D0[0	4 8			0	0	<u> </u>					ر <u>ن</u> 2	0			í	E SE
	espele	30 8	103	10 3	0 /			10	0/	0	0/	0	10	0	97	2	NCH CAR
	espele	30 8	۵	٩	70				0/10	0	0/	0	10	0	97	2	PUNCH CARD TRANSCRIPT
	espele	30 8	0 /	0/		10	0100	00100	0000	0	0/	0	10	0	97	2	PUNCH CAR
	espele	34 35 36 37 38 39	0/000	0/0	70	010	010	0/0	0/10						97	2	PUNCH CAR
	espele	34 35 36 37 38 39	0/000	0/00	100	00100	0100	00100	0000	0	0/	0	10	0	97	2	PUNCH CAR
	espeje VCIO	34 35 36 37 38 39	0/000	0/00	100	00100	0100	00100	0000	0	0/	0	10	0	97	2	PUNCH CAR
	espeje VCIO	34 35 36 37 38 39	0/000	0/00	100	00100	0100	00100	0000	0	0/	0	10	0	97	2	PUNCH CARE
	espeje VCIO	34 35 36 37 38 39	0/000	0/00	100	00100	0100	00100	0000	0	0/	0	10	0	97	2	PUNCH CARI
	espeje VCIO	34 35 36 37 38 39	0/000	0/00	100	00100	0100	00100	0000	0	0/	0	10	0	97	2	PUNCH CARI
	ASBF or MCLOK	28 27 30 31 32 33 34 35 36 37 38 39	01000	0/00	100	00100	0100	00100	0000	0	0/	0	10	0	97	2	PUNCH CARE
	MSBF or	28 27 30 31 32 33 34 35 36 37 38 39	01000	9/090	10001		0 1 0 0 0	00100	0000	0	0/	0	0 1 00 0	0	97	2	PUNCH CARE
	ASBF or MCLOK	26 27 28 29 30 31 32 33 34 35 36 37 38 39	01000	0/00	100	00100	0100	01000	0/1000	0 7000	01000	0 000	10	01000	01000	0/000	PUNCH CARE
	W W Service Control of the Control o	25 25 27 28 27 28 30 31 32 33 34 35 36 37 38 39	0 / 0 0 0 Q	9/090	10001		0 / 0 0 0	0100010	0 7000	0 7000	01000	0 000	0 1 00 0	01000	0/000	0/000	PUNCH CARI
	W W Service Control of the Control o	25 25 27 28 27 28 30 31 32 33 34 35 36 37 38 39	0 / 0 0 0 Q	0/000 000	10001	12 0	0/000	14 0 00 10	0/0000 0000	010001111100010	0/000 000/01	0 000	0 1 00 0	0 10001	0/000	0/000	PUNCH CARI
	W W Service Control of the Control o	25 25 27 28 27 28 30 31 32 33 34 35 36 37 38 39	0 / 0 0 0 Q	01000 010	1000	0/2/0	01000	014 0	0/0000 0000	0116 D 00010	01/000 000/01/0	0 000	0 1 00 0	0/8/0	0/000	0/000	PUNCH CARI
	W W Service Control of the Control o	25 25 27 28 27 28 30 31 32 33 34 35 36 37 38 39	0 / 0 0 0 Q	001000 0000	1000	12 0	0/000	0014 0	0 7000	01000 0100010	01/000 000 000	0 000	0 1 00 0	0/000	0/000	0/000	PUNCH CARI
	W W Service Control of the Control o	25 25 27 28 27 28 30 31 32 33 34 35 36 37 38 39	0 / 0 0 0 Q	01000 010	1000	0/2/0	01000	014 0	0/0000 0000	0116 D 00010	01/000 000/01/0	0 000	0 1 00 0	0/8/0	0/000	0/000	PUNCH CARI
	W W Service Control of the Control o	25 25 27 28 27 28 30 31 32 33 34 35 36 37 38 39	0 / 0 0 0 Q	001000 0000	1000	0/2/0	0/000	0014 0	0/0000 0000	01000 0100010	01/000 000 000	0 000	0 1 00 0	0/000	0/000	0/000	PUNCH CARI
	W W Service Control of the Control o	25 25 27 28 27 28 30 31 32 33 34 35 36 37 38 39	0 / 0 0 0 Q	001000 0000	50011 5 1 10001	50012 0	J0013 D	50014 0	J0000	50016 D 00010	50017 000 0	D 1 00 0	0 1000	T00/8 C	100010	0/000	PUNCH CARE
	W W Service Control of the Control o	25 25 27 28 27 28 30 31 32 33 34 35 36 37 38 39	0 / 0 0 0 Q	0/000 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	0 50011 5 110001	50012 0	2 50013 0	V 50014 D 00010	0 7000 0 0 0 0 0 0 0	2 50016 D 00010	01000 0 000 00000	01000	N 00010	0/00/8	0100010	07000	
	Po Po Po Po Po Po Po Po Po Po Po Po Po P	25 25 27 28 27 28 30 31 32 33 34 35 36 37 38 39	0 / 0 0 0 Q	0/000 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	0 50011 5 110001	W2 J0012 D	TZ J0013 D 00010	8V J0014 D	000000000000000000000000000000000000000	72 50016 D 00010	74 50017 D 00010	D 1 00 0 1 1 1 1 1 1 1 1	N 00010	0/00/8	58 70019 6 00010	0/00/0	
	Po Po Po Po Po Po Po Po Po Po Po Po Po P	25 25 27 28 27 28 30 31 32 33 34 35 36 37 38 39	0 / 0 0 0 Q	001000 0000	0000 50011 5 1 10001	NW2 J0012 D 00010	XIX 50013 D 00010	C 8 V JOO14 D 00010	100 50015 0	72 50016 D 00010	MT4 500017 D D	D 1 00 0 1 1 1 1 1 1 1 1	N 00010	0/00/8	58 70019 6 00010	000010	
	Po Po Po Po Po Po Po Po Po Po Po Po Po P	25 25 27 28 27 28 30 31 32 33 34 35 36 37 38 39	0 / 0 0 0 Q	1 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	0000 500111 5 110001	UNW2 JOO12 D	AXIZ J0013 D	EC 81 JOO14 D 00010	5100 50015 0	RMT2 50016 D 00010	RMT4 500017 D	D 1 00 0 1 1 1	HPC K D D D D D D D D D D D D D D D D D D	1 1 2 1 1 0 0 0 1 0 0 0 1 0 0 0 1 0 0 0 1 0 0 0 1 0 0 0 1 0 0 0 1 0 0 0 1 0 0 0 0 1 0	11.58 Jan 9 6 100010	0/000/0	
	S S S S S S S S S S S S S S S S S S S	25 25 27 28 27 28 30 31 32 33 34 35 36 37 38 39	0 / 0 0 0 Q	RUMMI 50010 D	10000 30011 5 11000	RUNW2 JOO12 D	XIX 50013 D 00010	RECOV JOOI 4 D 00010	AS1 6 6 TO 15 D 00 01 0	C RMT12 510016 D 100010	CRMT4 50017 D 00010	FPST1 D D 00010	CHPCK D 00010	ALL 511 TOO 18 C	A 11.58 TOO 19 C	ALL 59	
	Piedse	25 25 27 28 27 28 30 31 32 33 34 35 36 37 38 39	0 / 0 0 0 Q	1 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	10000 30011 5 11000	UNW2 JOO12 D	AXIZ J0013 D	EC 81 JOO14 D 00010	5100 50015 0	RMT2 50016 D 00010	RMT4 500017 D	D 1 00 0 1 1 1	HPC K D D D D D D D D D D D D D D D D D D	ALL 511 TOO, 8 C	CA1158 TD019 C	CALL 59	
	elease	01:112:13[4]13 16 172:18 19 20 21 22 22 22 28 29 27 28 29 20 31 22 33 34 35 36 37 38 39	0 / 0 0 0 Q	HRLINWII 50010 D	200000 50011 5	RUNW2 JOO12 D	JTAKEZ J0013 D	HRECKY JOOI4 D	GAS100 JO015 D 00010	DCRMT2 50016 D 00010	DCRMT4 50017 D 00010	FPST1 D D 00010	CHPCK D 00010	ALL 511 TOO 18 C	A 11.58 TOO 19 C	CALL S9	
	elease	01:112:13[4]13 16 172:18 19 20 21 22 22 22 28 29 27 28 29 20 31 22 33 34 35 36 37 38 39	0 / 0 0 0 Q	9 HRUNW 1 JOO10 D D	100000000000000000000000000000000000000	BRUNW2 JOO12 D	AXIZ J0013 D	RECOV JOOI 4 D 00010	AS1 6 6 TO 15 D 00 01 0	15 DCRMTZ 50016 D 00010	16 DCRMT4 50017 D	17 WFPST11 D 00010	17 HCHPC K	7 CALLS 11 TOO 8 C	ग्रह टाबाम डाडा जान्याचा विकास ।	0 CALLS9	
	elease	01:112:13[4]13 16 172:18 19 20 21 22 22 22 28 29 27 28 29 20 31 22 33 34 35 36 37 38 39	0 / 0 0 0 Q	9 HRUNW 1 JOO10 D D	100000000000000000000000000000000000000	0111 HRUNM2 J0012 D	012 JTAKITZ JO013 D	013 HIRECOV JOCIA D 000010	4 GAS100 JO015 D	015 DCRMTZ 50016 D 00010	16 DCRMT4 50017 D	17 WFPST11 D 00010	17 HCHPC K	7 CALLS 11 TOO 8 C	01/2 CAULSIS TO019 C	019 CALLS9	
	elease	Node	DONE STRAIL JOSO D	0009 HRUNWII JO010 D	100000000000000000000000000000000000000	11 HRUMM2 JOO12 D	00012 JTANEZ J0013 D	013 HIRECOV JOCIA D 000010	14 GASI 00 JOO15 D	015 DCRMTZ 50016 D 00010	0016 DCRMT4 50017 D	0017 HFPST11 D 00010	17 HCHPC K	7 CALLS 11 TOO 8 C	01/2 CAULSIS TO019 C	CALLS9	RYDIA EDITIONS OF THIS FORM WILL BE USED HAT, STOCK IS DEPAUSTED.
	elease	Node	DONE STRAIL JOSO D	0009 HRUMMI JOQ10 D	0/00 200000 30011 5 10001	0111 HRUNM2 J0012 D	012 JTAKITZ JO013 D	013 HIRECOV JOCIA D 000010	0/14 GAS11010 JO0115 D	015 DCRMTZ 50016 D 00010	16 DCRMT4 50017 D	17 WFPST11 D 00010	17 HCHPC K	7 CALLS 11 TOO 8 C	01/2 CAULSIS TA01/9 C 000010	019 CALLS9	RYDICAS CORTICAS OF THIS FORM WILL BE USED HATL STOCK IS DEPAUSTED.
	elease	25 25 27 28 27 28 30 31 32 33 34 35 36 37 38 39	DONE STRAIL JOSO D	0009 HRUMMI JOQ10 D	00010 200000 20011 5	00111 HRUNM2 J0012 D	00012 JTANEZ J0013 D	013 HIRECOV JOCIA D 000010	0/14 GAS11010 JO0115 D	015 DCRMTZ 50016 D 00010	0016 DCRMT4 50017 D	0017 HFPST11 D 00010	17 HCHPC K	7 CALLS 11 TOO 8 C	01/2 CAULSIS TO019 C	CALLS9	PERVOLS EDITIONS OF HIS FORM WILL BE USED UM. SPOCK IS EDIMINETED.
	elease	Prior Node	JACON STAXIII JOOQ9 D	0009 HRUMMI JOQ10 D	00010 200000 20011 5	00111 HRUNM2 J0012 D	00012 JTANEZ J0013 D	013 HIRECOV JOCIA D 000010	0/14 GAS1000 JO015 D	015 DCRMTZ 50016 D 00010	0016 DCRMT4 50017 D	0017 HFPST11 D 00010	17 HCHPC K	7 CALLS 11 TOO 8 C	01/2 CAULSIS TO019 C	CALLS9	PERVOLS EDITIONS OF HIS FORM WILL BE USED UM. SPOCK IS EDIMINETED.
	elease	Prior Node WUC Next Node V Probability Clock No. 18.	TANTI Jacon D	0009 HRUMMI JOQ10 D	00010 200000 20011 5	00111 HRUNM2 J0012 D	00012 JTANEZ J0013 D	013 HIRECOV JOCIA D 000010	0/14 GAS1000 JO015 D	015 DCRMTZ 50016 D 00010	0016 DCRMT4 50017 D	0017 HFPST11 D 00010	17 HCHPC K	7 CALLS 11 TOO 8 C	01/2 CAULSIS TO019 C	CALLS9	PERVOLS EDITIONS OF HIS FORM WILL BE USED UM. SPOCK IS EDIMINETED.
	Piedse	Prior Node VUC Next Node V Probability Clock No. 18.	JANDER STANTI JOSO D	0009 HRUMMI JOQ10 D	00010 200000 20011 5	00111 HRUNM2 J0012 D	00012 JTANEZ J0013 D	013 HIRECOV JOCIA D 000010	0/14 GAS1000 JO015 D	015 DCRMTZ 50016 D 00010	0016 DCRMT4 50017 D	0017 HFPST11 D 00010	17 HCHPC K	7 CALLS 11 TOO 8 C	01/2 CAULSIS TO019 C	CALLS9	PERVOLS EDITIONS OF HIS FORM WILL BE USED UM. SPOCK IS EDIMINETED.
	elease	Prior Node WUC Next Node V Probability Clock No. 18.	JANDER STANTI JOSO D	0009 HRUMMI JOQ10 D	00010 200000 20011 5	00111 HRUNM2 J0012 D	00012 JTANEZ J0013 D	013 HIRECOV JOCIA D 000010	0/14 GAS1000 JO015 D	015 DCRMTZ 50016 D 00010	0016 DCRMT4 50017 D	0017 HFPST11 D 00010	17 HCHPC K	7 CALLS 11 TOO 8 C	01/2 CAULSIS TO019 C	CALLS9	RYDIS EDITIONS OF THIS FORM WILL RE USED HITL STOCK IS DEMUSTED.

ंडी

Figure 12. Example of mode 2 preflight to postflight network coding (continued).

2.0

E = Mutually exclusive probability. The probability value is entered in the same manner as for A selection mode. All E probabilities from the same prior node must sum to 1.00, and one and only one will be selected on any given pass through the network. These probabilities are used for branching to one of a series of possible paths.

- D = Do the task. The probability field is left blank.
- S = Sortie. This selection mode must be used with all sortie tasks scheduled on the Form 20. The probability field is left blank.

A clock number is entered in columns 34 - 37. It is always 00010 for all main network tasks. Scheduled maintenance code 3 is entered in column 40 for most main network tasks. The sortie task must have a 1 in column 40, and certain dummy tasks that do not represent any flying, maintenance, or service may be coded 5 (other). All main network tasks are coded with priority class 1 in column 41. The mission priorities specified on the Form 20 (Section II) determine the actual priorities given to class 1 pre-sortie tasks during the simulation.

The average task time is entered in columns 43-47 in tenths of hours, right justified, no decimal. Two hours is entered as 20 in columns 46-47. The standard deviation is entered as a percent of the average time, right justified, in columns 48-50. A Tactical Air Command work measurement study indicated that 29 percent (29 in columns 49-50) is a good maintenance task variability estimate. It has been used in modeling new aircraft where more precise variability measures are not available. The same study showed that maintenance task times generally conform to a lognormal distribution. Task time distribution is specified in column 51. Applicable codes are:

- L = Lognormal
- N = Normal
- C = Constant (variability left blank)

The people and AGE required to do the work are entered in the balance of the extended 11 Form. If it takes two 431X1 mechanics to preflight the airplane, this would be entered with a 2 in column 53 and 431X1 in columns 54 - 58. If they need a B-4 stand, this would be entered on the same line with 1 in column 60 and B4 in columns 61 - 62. All resources listed for a task must be available before the computer will begin task processing, and all will be utilized for the indicated task time. The same resource must always be entered with exactly the same name throughout the model. It cannot be coded B-4 on one task and B4 on another. If more than 4 resource fields are needed, they can be entered on a continuation card. To do this, a C is entered in column 80 of the first card. The continuation card with the additional resources must be placed immediately after it, and carry the same task name and clock number.

All the resources required for a task must be defined on the extended Form 11 at the first place that task appears in the model. If the same

task is repeated in another line entry, the resources are not entered again. For example, the identical preflight inspection task might be shown in several networks for different missions. The first time it is used all the resources must be defined. Each time the preflight task is listed after that the resource fields are left blank.

In addition to the task data entries, header cards can be used to enter descriptive nomenclature for individual tasks or networks of tasks. A header card has an H in column 25, the clock number in column 34 - 38, and the nomenclature starting in column 42.

Coding Network Call Sections

A call task is a dummy representing all the tasks in a section of network. All applicable tasks within the section must be done before the call task can be completed, or any following task started. Tasks which can be done in parallel but all constrain some subsequent task are coded in call sections. In ASD LCOM, no parallel tasks can precede a sortic unless they are in a call section. Call sections are also useful where the same group of tasks is repeated in several networks. The call section tasks are defined in the first place the call appears, and just the call task used to represent them thereafter.

The call task is coded with C in column 12, and the remainder of a unique task name in columns 13 - 17. The selection mode in column 26 must be C. The tasks comprising the call section are listed immediately after the call task in the first place it is used. This defines the call task. The name of the call task is entered as the starting node, or nodes, on the first tasks in the call section (see CALLL3 in Figure 12). Subsequent tasks in the call section are coded in the normal manner. Any number of tasks can be defined in a call section, from one by itself to hundreds in many parallel strings. However, a specific call task name must only be defined once in the entire model, at the first place it appears. After that only the call task name is used to represent all the tasks in that call section.

Including Provisions for Unscheduled Maintenance

The relationship between the main networks and unscheduled maintenance networks is shown in Figure 3. Aircraft break as a result of flying. The failure clocks and the unscheduled maintenance work to fix broken aircraft are defined in call sections. Corrective maintenance tasks are only called where the failure tasks clocks indicate something is broken. If nothing is broken or when it has been fixed the program proceeds on to the next main network task.

All unscheduled maintenance that could be done concurrently is defined in a single large call section named CALLS1. The data base processing programs automatically provide the necessary starting tasks to define CALLS1. Unscheduled maintenance that would conflict with other work and

must be done by itself is shown in separate sequential call sections. Examples of such work are repairs requiring aircraft jacking or towing the aircraft to a test cell for engine runup. These conflicting maintenance call sections are defined in a different manner covered later in Section VI. These unscheduled maintenance call sections are an exception to the general rule. They are the only call sections not defined where they first appear in the main networks.

When failures are discovered on a loaded aircraft just prior to a sortie, the munitions must be dearmed (cartridge ejectors removed) before any maintenance work is done. In some few cases, such as jacking or engine runup, the ordinance may have to be off-loaded. This work is shown in a change call section illustrated by CALLS5 and CALLS6 in Figure 12. The call section is defined by a single task or linear string of tasks with X selection modes in column 26. The end mode of the last task in the defining string is the name of the appropriate unscheduled maintenance call section. The X is a special selection mode for defining call sections in this situation. It is used to "carry forward" the failure clock from the unscheduled maintenance call section, so that the dearm or download is only done if a clock has failed and unscheduled maintenance is required. If there is no failure the simulation skips over this call and proceeds with the next main network task.

Decrement tasks are inserted in the main networks to show where failure clocks are to be advanced. The appropriate decrements advancing the clocks must precede the unscheduled maintenance call sections that check to see if there is a resulting failure. Decrements can be defined to advance clocks by a whole sortie or fractions of a sortie, and can be set up to advance some clocks and not others. Each uniquely named decrement task advances a particular set of clocks by a specific amount. For the example in Figure 12, the task DCRMT1 advances the clocks by a fraction of a sortie to account for possible failures prior to takeoff. The three call sections that follow check the unscheduled maintenance networks to see if any subsystems have failed as a result of this clock advance. After the flight DCRMT2 advances these clocks the balance of the sortie, and DCRMT4 advances certain clocks that involve work only done in postflight. The call sections to check and fix failures follow in sequence.

Decrement tasks are coded on the extended Forms 11 with a task name DCRMT and a unique number, with the D starting in column 12. Selection mode in column 26 is D. Probabilities and resources are left blank. The listing of clocks decremented and value of the decrement is entered in another format. Instructions for this input are covered in Section VI.

Preflight to Postflight Network

costi (

The remainder of this chapter illustrates main network coding and construction using a number of detailed examples of situations that were

encountered in developing LCOM models for tactical aircraft. Figure 11 is a schematic of a mode 2 (preflight to postflight) network for an A-7D, and Figure 12 shows how it is coded on extended Forms 11.

It takes one crew chief an average of 3.6 hours to preflight an A7. They do not double up to shorten the time, even in combat, although this could be done. LOX, nitrogen, and air are serviced during preflight. These are shown as separate tasks because different people do the work. The crew chief removes the LOX bottle and places it at the nose wheel if it needs refilling. It is needed on about 40% of the preflights so this task is coded with A selection mode and a probability value of 40 is placed in columns 31 - 32. On the average the task will be done on 40% of the preflights, and on the other 60% it will be skipped. To service LOX, one 431X1 goes around and picks up the bottles. Another 431X1 refills two at a time, taking an average of 15 minutes per bottle. The task is shown as requiring two 431X1s for .2 hours using one LOX servicing cart. Two other 431X1s take a service cart to each aircraft during preflight to replace nitrogen bottles as required, and to service tire air. This task requires two 431X1 APGs for .2 hour per aircraft. Since nitrogen and air are checked every time, selection mode D is entered in column 26. Since the crew chief preflight, LOX Service, and Nitrogen/air service are parallel tasks constraining start of the next main network task (loading), they must be coded in a call section.

The example mission involves a bomb load only (no gun or camera), and takes a 4 man load crew one hour using standard loading equipment. This time was computed by summing TACM 50-7 standards for the particular ordinance load and adding 15 minutes for travel. The launch (engine start) task covers all elapsed time from the point the pilot joins the crew chief at the aircraft for walkaround until start of taxi. It takes and average of .8 hours and includes time that the crew chief stands by while the pilot performs his checks and runs up the engine with the plane in chocks.

CONUS policies on download vary by base. Combat aircraft are never downloaded if at all possible. The only situations in which an aircraft must be downloaded are an engine problem requiring runup in the test cell, a jacking problem involving more than one wheel, failure of weapons control/release systems, work on the fuel cells, or it the aircraft must go into a hangar (phase). Of these, only engine problems and jacking have a fair likelihood of occurring as a ground abort (between engine start and takeoff). When a ground abort for engine or landing gear occurs, the download and upload are shown together in one task for networking convenience, even though the upload portion would occur much later. This simplification should not make any significant difference in the simulation results. In most cases, ground abort will only require a dearm task (removing cartridge ejectors), and then a rearm and repeat of stray voltage checks when the maintenance is completed. Dearm and rearm are also networked in a single task. The call sections are checked in sequence, and if there is no failure, the aircraft proceeds to taxi. The taxi task consumes time but not resources.

Three 431R1 APGs (four in combat) are stationed at the end of the runway for final launch check. One of these is a team chief who talks to the pilot via intercom. Two munitions men (462R0) are also part of the launch EOR team to pull the pins on ordinance. All EOR crews are stationed there for a full eight hour shift. EOR check is shown in the networks as a .1 hour task for 2 431Xls and 2 462ROs after a .2 hour taxi. A dedicated crew is not available for any other work and must be treated as a separate AFSC in LCOM. Runway checkers are uniquely identified by an R in the fourth digit of their AFSC.

The sortie task removes the aircraft from the simulation for a random time according to the sortie length distribution specified on the Form 20. The extended Form 11 does not require any time or resource entry for a sortie task. Sortie tasks are coded with an S selection mode in column 26 and 1 in column 40.

Two 462RO munitions men are stationed at the other end of the runway to check returning aircraft for hung ordinance and to safety ordinance not dropped. One 431R1 APG is also part of the recovery EOR team to park the aircraft for the ordinance EOR check. While the aircraft is taxiing in, the crew chief and an age handler are getting ready for recovery in the parking area. Their work is shown on the taxi task. The crew chief then parks the aircraft in the .1 hour recovery task.

Aircraft are fueled in the parking area or revetment when the fuel truck arrives. The postflight is interrupted to allow two 431Xls and one POL driver to refuel the aircraft. For the purpose of modeling, fueling is shown prior to postflight. This slight disparity with the actual time sequence makes no difference in the LCOM output since fuel trucks are not constrained. Fueling an empty A7 requires .3 hours, and less time if the plane still has fuel aboard. In this example the plane returns from air refueling with partially full tanks, so the task time is .2 hours by 2 431Xls. The POL driver is not part of the maintenance unit for which manning is being determined, so need not be shown on the extended Form 11.

The aircraft is not to be turned for another mission and goes into a 3.7 hour end-of-day full postflight by the crew chief. End of day postflights on the A-7 include an oil chip check requiring one 432X0 for .3 hours. Unscheduled maintenance is done in parallel with postflight except for engine or autopilot work requiring engine runup and/or functional checkflight, and work requiring jacking the aircraft. These call sections are networked in sequence after CALLS1 unscheduled maintenance is completed. After all required network tasks are finished, the aircraft is released for another assignment controlled by the Forms 20.

Networking Turnarounds and Scheduled Inspections

1

If an aircraft is to fly again the same day it is given a thruflight inspection rather than a full end of day postflight. The mode 4 network

for the next mission then picks up where the mode 1 network left off. It starts with the load task, which is determined by the next mission requirement and proceeds through sortie and postflight. Tasks shown after the sortie in the mode 1 network are common to all flying or depend on the type of mode 1 mission flown. All tasks which depend on the type of mode 4 mission are shown in the mode 4 network. An aircraft does not necessarily have to turn to the same kind of mission.

An example of the interface between mode 1 and mode 4 networks is shown in Figure 13. Figure 14 shows how the mode 4 network is coded on extended Form 11. Resources and times are not shown on any of the tasks because they were previously defined.


Figure 14 shows one method of networking scheduled maintenance done in conjunction with postflight. For this aircraft there is a basic gun postflight during end of the day postflight any time the gun is used. Other gun scheduled inspections are based on rounds fired. If an average combat mission with guns expends 500 rounds of 1,000 loaded, and 50% of the aircraft flying gun missions are turned, 1.5 gun sorties are flown and 750 rounds expended per gun postflight. The inspection requirements for this example are:

- Every 3750 RDS (5 gun postflights) torque bolts on A/C, two men two hours
- Every 30,000 RDS (40 gun postflights) remove bolt and change bolt spring in shop, two men 2.5 hours
- Every 30,000 RDS (40 gun postflights) remove and lubricate ammo chutes, three men six hours
- Every 30,000 RDS (40 gun postflights) change six gun barrels, three men three hours (old barrels are scrapped)

The frequency of this scheduled maintenance is related directly to gun use by only including it in gun mission networks. The tasks are coded, with E (mutually exclusive) selection modes because the actual inspection cycle is staggered. With E probabilities only one of the possible tasks will be done each time. A dummy task with no time or resources is inserted to account for the probability that no inspection falls due.

Networking Alert Missions

The method used to network alert depends on the particular assumptions and scenario. These can vary considerably and may be difficult to model precisely. A representative tactical alert situation is described below, and modeled in Figure 15. This example illustrates the simplifications that sometimes have to be made in modeling a complex situation. The key requirement is that the simplifications do not distort the relevant output measures.

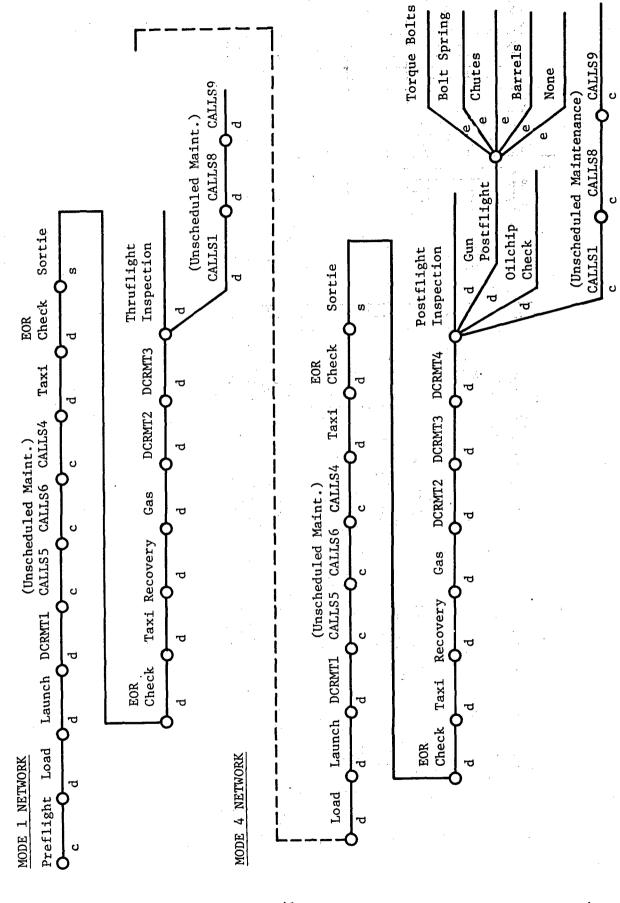

	noitevniine	- T		_		4			- -	-			_		_	_	
ł		-1;		+	╫	+	+	+	+-	┿		+-	+-	┿-	+-	+-	4
l		O M O TO TO TO THE THE THE THE	} -	╁╌	+-	┿	╅━	+-	┰	+-	+	┪	┿-	┿-		╬	4
j		₹	- (+	+-	+-	╫	+-	+	+-	+-	+	+-	+-	┿	┿	-{
ľ		<u>دا</u> ي	:-	+	+-	+	4-	+-	+	╈	+-	┿	+-	+	+-	+	┨
		₹ :	1	1	1	+-	1	+-	+	+-	+	+	+-	┿	┿	┿	┥
1		z;											\top	+-	+	+-	1
1		22		1_						\mathbf{I}	T			1	_	_	7
1		"		-	1		\mathbb{L}_{-}		oxdot	\perp			T-	Т	T	1	7
1		2 5		IF	1_		\mathbb{I}_{-}		匚	\Box							1
1	:	18		`\$	$oldsymbol{\bot}$						Ί_		\Box	\mathbf{L}	L	T	7
1		<u> </u>	1	Σ			L		\perp							$oldsymbol{\mathbb{L}}$]
)		<u> </u>	7	<	Щ.	\bot	ļ	 	<u> </u>	1				1_			_
1		43	9	1=	4-	╄	╀	4	_	┷		↓	1_	1_	┸.		┛.
l		3		!	↓	╀~	1_	 	 	1_	4	↓	4_		4.		AFLC-WPAFB-JAN 74 500
]		00 61 62 65 64 65	ب. ا	├	↓_	╁—	╄~	↓_	 	 	Д_	↓	ــــ	1	4	1	7.
ĺ		1 62 63 64 6	H	├	₩	┼	 	╀	↓_	╀	╁┈	↓	╄	╀	4.	┦	1 3
ŀ		١	ST	5	+-	┼	┼	┼	┷	┼	 	╁┈	╁	┵	┼	+-	-1 ₹
ľ	ž	냼	岩	E	-	┼~	╁	-	┼	┽	┼	├	+	 	┼┈	 	4 1
ł		- 0	200	1=	+	+	┼~	+	┼	┼	┼──	┿	┾┈	┼	┿┈	┼	ને કું
ł		8	 • • • • • • • • • • • • • • • • • • •	 	-	┼	╫╌	+	╀	+	┼──	┼	┼	┼	┿┈	+	┪`
		Į,	B	0	 	+	+	+ -	+-	┼	+-	┼~	┼~~	+	+	+=	.1
		15	F	N	1	\vdash	+-	1	1-	†	+-	 	_	+	+-	×	1
	•	18		1 ~	1	1	†	┼┈	_	+	t^{-}	1	 	+-	+-	†≘	1
		1	w	و		1	1	 	 	t	1-	 	_	+-	+	100	1
	=	43	H	46	1	1	1	†	1	1	†	1	1	1	1	14	7
	2	52 54 55 56 57	H	4	\vdash			1	1	1	1			1	1-	243	1
l		2	1	Ľ						T^-	T^{-}			1	1	╁	1
	eqyl . taic	1 5	Щ.	7				Γ								1~	1
		69 50	HRU	٩			1		I						L^-	ह	7
	* \$		R		<u></u>	L								\Box	Γ	त]
		14	#				<u> </u>									1	1
	_	6	T	8		L.										3]
	HOURS	43 44 45 46		=	<u> </u>	<u> </u>	<u> </u>		<u> </u>	1	L_		<u></u>	L_	_		1
	HOURS	3	4				ļ				ļ			<u> </u>	<u> </u>		<u> </u>
	¥.	Ш	F		<u> </u>	L	<u> </u>	<u> </u>	<u> </u>	L_	 			L	<u> </u>	ļ.,	
		13	GA			ļ	ļ	<u> </u>			ļ					L.	1≅
	Priority	2	9			-	-								<u> </u>	├	13
	Type Task	69		3	31	-	_	_	-			-	_	1]=
							~~	. ~~	2	-			~~	-			
	Kelegte			1.)	17	W	B	3	3	B	3		3	B	3	3	3
	Release	8) (Ι	1	CARD
	Release	38	0 /	0/	0 1	0	103	103	103	٥	103	1 0 1	10 3	103	0	1	ICH CARD
	Release	38		010	0 /	0	0 /	10		0	0 /	-	01	01	0 /	1	PUNCH CARD
	Release	38		010	0 /	0	0 / 0	0100	0/	010	0/0	70		010	0 /	1	PUNCH CARD TRANSCRIPT
	Release	34 35 36 37 38 39		0/			0 /	10	0/10	0	0 /	-	010	01	Ι	1	PUNCH CARD
	ACLOK Clock Zo.	33 34 35 36 37 38 39		010	0 /	0	00100	0100	00100	0100	00100	100	0000	0100	0 100	00000	PUNCH CARD
	ACLOK Clock Zo.	33 34 35 36 37 38 39		010	0 /	0	00100	0100	00100	0100	00100	100	0000	0100	0 100	1	PUNCH CARD
	ACLOK Clock Zo.	33 34 35 36 37 38 39		010	0 /	0	00100	0100	00100	0100	00100	100	0000	0100	0 100	1	PUNCH CARD
	ACLOK Clock Zo.	33 34 35 36 37 38 39		010	0 /	0	00100	0100	00100	0100	00100	100	0000	0100	0 100	1	PUNCH CARD
	ACLOK Clock Zo.	33 34 35 36 37 38 39		010	0 /	0	00100	0100	00100	0100	00100	100	0000	0100	0 100	1	PUNCH CARD
	ACLOK Clock Zo.	33 34 35 36 37 38 39		010	0 /	0	00100	0100	00100	0100	00100	100	0000	0100	0 100	1	PUNCH CARD
	ACLOK Clock Zo.	33 34 35 36 37 38 39		010	0 /	0 / 0 0 0	0 10001	01000	0 1000	01000	00100	1000	01000	0100	0 10 0 0	01000	PUNCH CARD
	ACLOK Clock Zo.	26 27 28 27 36 31 32 33 34 35 36 37 38 39		0 1000 0	0000	0	00100	0100	00100	0100	01000	100	0000	0100	0 100	1	PUNCH CARD
	Sel. Mode Sel. MSBF or KCLOK Clock No.	25 26 27 28 27 30 31 32 33 34 35 36 37 38 39	1000	0 1000 0	0 1000 10	0 / 0 0 0	0 10001	01000	0 1000	8 D 00010	0 / 0 0 0 d b	1000	01000	0100	0 10 0 0	0 1 0 0 0 1 0 0 0 1 0	PUNCH CARD
	Sel. Mode Sel. MSBF or KCLOK Clock No.	25 26 27 28 27 30 31 32 33 34 35 36 37 38 39	1000	0 1000 0	0 1000 10	64 D 00010	65 C 00010	0100010	67 6 00010	0 10 0 0 0 1 0 0 0 1 0 0 0 1 0 0 0 1 0 0 0 0 1 0	01000 D	70 5 0001	7/1 10 000 110	0 0 0 0 0 0 0	0/000	0 1 0 0 0 1 0 0 0 1 0	PUNCH CARD
	Sel. Mode Sel. MSBF or KCLOK Clock No.	25 26 27 28 27 30 31 32 33 34 35 36 37 38 39	1000	062 0 00010	0 1000 10	64 D 00010	65 C 00010	066 C 00010	67 6 00010	0 10 0 0 0 1 0 0 0 1 0 0 0 1 0 0 0 1 0 0 0 0 1 0	0 69 D 00010	70 5 0001	7/1 10 000 110	072 D 00010	073 D 00010	0 1 0 0 0 1 0 0 0 1 0	PUNCH CARD
	Sel. Mode Sel. MSBF or KCLOK Clock No.	25 26 27 28 27 30 31 32 33 34 35 36 37 38 39	1000	0 1000 0	0 1000 10	4 D 00010	S C 00010	0100010	0067 6 00010	8 D 00010	01000 D	0 0 0 0 0 0 0	01000 011	72 0 00010	0 0 0 1 D D D D D D D D D D D D D D D D	0074 D 00010	PUNCH CARD
	Sel. Mode Sel. MSBF or KCLOK Clock No.	25 26 27 28 27 30 31 32 33 34 35 36 37 38 39	1000	062 0 00010	0000	64 D 00010	65 C 00010	066 C 00010	67 6 00010	0 10 0 0 0 1 0 0 0 1 0 0 0 1 0 0 0 1 0 0 0 0 1 0	0 69 D 00010	70 5 0001	7/1 10 000 110	072 D 00010	073 D 00010	0 1 0 0 0 1 0 0 0 1 0	PUNCH CARD
	Sel. Mode Sel. MSBF or KCLOK Clock No.	25 26 27 28 27 30 31 32 33 34 35 36 37 38 39	1000	062 0 00010	0 1000 10	64 D 00010	65 C 00010	066 C 00010	0067 6 00010	0 10 0 0 0 1 0 0 0 1 0 0 0 1 0 0 0 1 0 0 0 0 1 0	0 69 D 00010	70 5 0001	7/1 10 000 110	072 D 00010	0 0 0 1 D D D D D D D D D D D D D D D D	0074 D 00010	PUNCH CARD
	Sel. Mode Sel. MSBF or KCLOK Clock No.	25 26 27 28 27 30 31 32 33 34 35 36 37 38 39	1000	J0062 D 00010	J0063 D 00010	J0064 D 00010	J0065 C 00010	Joole 6 C 000 10	50067 C 00010	0 10 0 0 0 1 0 0 0 1 0 0 0 1 0 0 0 1 0 0 0 0 1 0	0 69 D 00010	50070 5 0001	J00711 D 00010	J0072 D 00010	J0073 D 00010	50074 D 00010	PUNCH CARD
	Sel. Mode Sel. MSBF or KCLOK Clock No.	25 26 27 28 27 30 31 32 33 34 35 36 37 38 39	1000	4 Jook2 D 00010	T J0063 D 00010	1 J0064 D 00010	5 Jooles C 00010	6 Joole 6 C 000 10	4 50067 C 00010	1 J 50 68 D	1 Jooka D 00010	0 50070 5 0001	J00711 D 00010	2 Job 72 D 00010	V J0073 D 00010	5 50074 D 00010	
	Sel. Mode Sel. MSBF or KCLOK Clock No.	25 26 27 28 27 30 31 32 33 34 35 36 37 38 39	1000	T4 JO062 D 100010	T J0063 D 00010	1 J0064 D 00010	55 Job65 C 00010	Joole 6 C 000 10	54 50067 C 00010	III J0068 D 00010	WI J0069 D 00010	00 50070 5 0001	J00711 D 00010	12 Job 72 D 00010	MY J0073 D 00010	5 50074 D 00010	
	Sel. Mode Sel. MSBF or KCLOK Clock No.	25 26 27 28 27 30 31 32 33 34 35 36 37 38 39	1000	T4 JO062 D 100010	T J0063 D 00010	1 J0064 D 00010	155 J0065 C 00010	6 Joole 6 C 000 10	LS4 50067 C 00010	III J0068 D 00010	WI J0069 D 00010	000 50070 5 0001	NW2 JOO711 D 100010	12 Job 72 D 00010	MY J0073 D 00010	5 50074 D 00010	
	Sel. Mode Sel. MSBF or KCLOK Clock No.	25 26 27 28 27 30 31 32 33 34 35 36 37 38 39	1000	60T4 J0062 D 00010	T J0063 D 00010	RMT 1 J0064 D 0001 0	LLSS J0065 C 00010	11 St Jook 6 C 000 10	1154 50067 C 00010	AXII J0068 D 00010	WI J0069 D 00010	0000 50000 5	UNW2 500711 D 00010	2 Job 72 D 00010	ECEN J0073 D 00010	5 50074 D 00010	
	Sel. Mode Sel. MSBF or KCLOK Clock No.	25 26 27 28 27 30 31 32 33 34 35 36 37 38 39	1000	60T4 J0062 D 00010	ENGST J0063 D 00010	1 J0064 D 00010	ALLSS J0065 C 000010	ALLISIG JOOGE C 000010	AULS4 50067 C 00010	III J0068 D 00010	1 Jooka D 00010	0000 50000 5	UNW2 500711 D 00010	12 Job 72 D 00010	ECEN J0073 D 00010	5 50074 D 00010	
<u>.</u>	Sel. Mode Sel. MSBF or KCLOK Clock No.	25 26 27 28 27 30 31 32 33 34 35 36 37 38 39	7000	T4 JO062 D 100010	T J0063 D 00010	CRMT1 10064 D	LLSS J0065 C 00010	11 St Jook 6 C 000 10	1154 50067 C 00010	TAXII J0068 D 00010	RUNWI J0069 D 00010	000 50070 5 0001	NW2 JOO711 D 100010	12 Job 72 D 00010	MY J0073 D 00010	5 50074 D 00010	
	Next Node Sel-Mode Sel-Mode Sel-Mode Sel-Mode Clock No.	25 26 27 28 27 30 31 32 33 34 35 36 37 38 39	7000	60T4 J0062 D 00010	2 HENGST JO063 D 00010	3 DC RMT 1 J0064 D 00010	4 CALLSS JOO65 C 00010	ALLISIG JOOGE C 000010	6 CALLS4 50067 C 00010	TAXII J0068 D 00010	HRUNWI J0069 D 00010	200000 50070 5	0 ARIUNW2 JOO711 D 00010	12 Job 72 D 00010	HRECDY J0073 D 00010	5 50074 D 00010	
	Next Node Sel-Mode Sel-Mode Sel-Mode Sel-Mode Clock No.	25 26 27 28 27 30 31 32 33 34 35 36 37 38 39	7000	1 BL 0044 JOO62 D 00010	2 HENGST JO063 D 00010	63 DC RMT1 10064 D 00010	64 CALLSS JOO65 C 00010	65 CALLSIG JOOGE C 000010	6 CALLS4 50067 C 00010	67 STAXII JO068 D 00010	HRUNWI J0069 D 00010	200000 50070 5	0 ARIUNW2 JOO711 D 00010	12 Job 72 D 00010	72 HRECON JOO73 D 00010	5 50074 D 00010	
	Next Node Sel-Mode Sel-Mode Sel-Mode Sel-Mode Clock No.	0 0 10 11 12 13 14 13 14 17 18 19 20 21 22 28 24 25 28 27 28 29 20 31 32 33 34 35 36 37 38 39	7000	1 BL 0044 JOO62 D 00010	062 HENGST JOO63 D 00010	063 DCRMT11 J0064 D	064 CALLSS JOO65 C 00010	65 CALLSIG JOOGE C 000010	066 CALLS4 50067 C	67 STAXII JO068 D 00010	HRUNWI J0069 D 00010	200000 50070 5	070 HRUNW2 JOOTH D 00010	071 STAKIZ JO072 D	072 HRECMY JO073 D 00010	5 50074 D 00010	
	Next Node Sel-Mode Sel-Mode Sel-Mode Sel-Mode Clock No.	0 0 10 11 12 13 14 13 14 17 18 19 20 21 22 28 24 25 28 27 28 29 20 31 32 33 34 35 36 37 38 39	7000	1 BL 0044 JOO62 D 00010	0062 HENGST 50063 D 00010	63 DC RMT1 10064 D 00010	0064 CALLSS JOOES C 00010	ODGS CALLSTO JOOGG C 000010	6 CALLS4 50067 C 00010	7 STAXIII JO668 D 00010	0 068 HRUNWI JOO69 D 00010	200000 50070 5	0 ARIUNW2 JOO711 D 00010	071 STAKIZ JO072 D	72 HRECON JOO73 D 00010	5 50074 D 00010	
	Next Node Sel-Mode Sel-Mode Sel-Mode Sel-Mode Clock No.	6 7 8 9 10 11 12 13 14 13 16 17 78 19 20 21 22 23 24 25 28 27 28 29 30 31 32 33 34 35 36 37 38 39	7000	60T4 J0062 D 00010	062 HENGST JOO63 D 00010	063 DCRMT11 J0064 D	064 CALLSS JOO65 C 00010	65 CALLSIG JOOGE C 000010	066 CALLS4 50067 C	67 STAXII JO068 D 00010	HRUNWI J0069 D 00010	0000 50000 5	070 HRUNW2 JOOTH D 00010	71 STAKIZ JOO72 D 00010	072 HRECMY JO073 D 00010	5 50074 D 00010	PUNCH CARD WITH STOCK IS EDMUSTED.
	Node Next Node Sprobability Clock No.	5 6 7 8 9 10 11 12 13 14 13 14 17 10 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39	7000	1 BL 0044 JOO62 D 00010	0062 HENGST 50063 D 00010	063 DCRMT11 J0064 D	0064 CALLSS JOOES C 00010	ODGS CALLSTO JOOGG C 000010	066 CALLS4 50067 C	67 STAXII JO068 D 00010	0 068 HRUNWI JOO69 D 00010	200000 50070 5	070 HRUNW2 JOOTH D 00010	071 STAKIZ JO072 D	072 HRECMY JO073 D 00010	J0073 GASZ1010 J00074 D 100010	PRYOUS ENTIONS OF THIS FORM WILL BE USED. UNTIL STOCK IS EDMLISTED.
	Next Node Sel-Mode Sel-Mode Sel-Mode Sel-Mode Clock No.	4 5 6 7 8 9 10 11 12 13 14 13 14 17 10 19 20 21 22 23 24 25 36 37 28 29 30 31 32 33 34 35 36 37 38 39	7000	1 BL 0044 JOO62 D 00010	0062 HENGST 50063 D 00010	063 DCRMT11 J0064 D	0064 CALLSS JOOES C 00010	ODGS CALLSTO JOOGG C 000010	066 CALLS4 50067 C	67 STAXII JO068 D 00010	0 068 HRUNWI JOO69 D 00010	200000 50070 5	070 HRUNW2 JOOTH D 00010	071 STAKIZ JO072 D	072 HRECMY JO073 D 00010	J0073 GASZ1010 J00074 D 100010	PRYOUS ENTIONS OF THIS FORM WILL BE USED. UNTIL STOCK IS EDMLISTED.
	Next Node Sel-Mode Sel-Mode Sel-Mode Sel-Mode Clock No.	3 4 5 6 7 6 9 10 10 11 12 13 14 13 14 17 10 19 20 21 22 22 24 25 24 25 24 27 20 31 32 30 31 32 30 37 38 39	7000	1 BL 0044 JOO62 D 00010	0062 HENGST 50063 D 00010	063 DCRMT11 J0064 D	0064 CALLSS JOOES C 00010	ODGS CALLSTO JOOGG C 000010	066 CALLS4 50067 C	67 STAXII JO068 D 00010	0 068 HRUNWI JOO69 D 00010	200000 50070 5	070 HRUNW2 JOOTH D 00010	071 STAKIZ JO072 D	072 HRECMY JO073 D 00010	J0073 GASZ1010 J00074 D 100010	PRYOUS ENTIONS OF THIS FORM WILL BE USED. UNTIL STOCK IS EDMLISTED.
₩ W	Next Node Sel-Mode Sel-Mode Sel-Mode Sel-Mode Clock No.	2 3 4 5 6 7 8 9 10 11 12 13 14 13 14 17 18 19 20 21 22 29 28 28 28 28 29 30 31 22 33 34 38 39	7000	1 BL 0044 JOO62 D 00010	0062 HENGST 50063 D 00010	063 DCRMT11 J0064 D	0064 CALLSS JOOES C 00010	ODGS CALLSTO JOOGG C 000010	066 CALLS4 50067 C	67 STAXII JO068 D 00010	0 068 HRUNWI JOO69 D 00010	200000 50070 5	070 HRUNW2 JOOTH D 00010	071 STAKIZ JO072 D	072 HRECMY JO073 D 00010	J0073 648200 J0074 D 00010	FORM 1530 PRINCIPLE SOFTING OF THE FORM WILL BE USED. FIRST APP. 1530 WITH STOCK IS EDMINISTED.
	Next Node Sel-Mode Sel-Mode Sel-Mode Sel-Mode Clock No.	3 4 5 6 7 6 9 10 10 11 12 13 14 13 14 17 10 19 20 21 22 22 24 25 24 25 24 27 20 31 32 30 31 32 30 37 38 39	7000	1 BL 0044 JOO62 D 00010	0062 HENGST 50063 D 00010	063 DCRMT11 J0064 D	0064 CALLSS JOOES C 00010	ODGS CALLSTO JOOGG C 000010	066 CALLS4 50067 C	67 STAXII JO068 D 00010	0 068 HRUNWI JOO69 D 00010	200000 50070 5	070 HRUNW2 JOOTH D 00010	071 STAKIZ JO072 D	072 HRECMY JO073 D 00010	J0073 648200 J0074 D 00010	PRYOUS EMPORTS OF THIS FORM WILL BE USED. UNTIL STOCK IS, EDIMINITIES.

Figure 14. Example of mode 4 thru flight to postflight network coding,

uōj.	N AFSC / AGE N AFSC / AGE CONFINUE	ន្តា									二			I	I		
÷		2	\dashv	\Box	7	4	\dashv	\dashv	-		-		-	-	+		
	8	딁	+	+		十	_	-+	_				\Box	士	二	ゴ	
	Š		コ	\rightrightarrows	4	\sqsupset	\Box	\Box	4	\Box	\dashv	_	-	+	-	-4	
-		許	-+	-	-	-		-+	+	\dashv	┰┼	-+	_	十	士	d	
-		2				\Box			\sqsupset	\Box	\Box	\Box	\Box	\Box	4	\neg	
_	-	2	4	_		}			\dashv		-+	\dashv	+	-+	+		
	Y	딁	-+	-+	+	-					士		コ	二	\Box	コ	
	. <u>%</u>	Ŝ				\Box		\Box	\Box	\Box	\Box		_			-1	
_	¥	3	-+	-+	+	-		{	\dashv	-+	-	-+	1	_	_	\exists	4 -
-		홝	+	_	1						\Box			\Box	4	\Box	AFLC-WPAFB-JAN 74 500
-		3	\Box		\exists	\Box	_				-+	-+	-+	╌┤	-+	\dashv	N.
	AFSC / AGE	哥	+	-+	-			-		\dashv						ゴ	AF9 :
	55	ड			\Box			\Box	\Box	\Box	\Box	-1			-+		A. N
-	Z	딍	-	-+	-					\dashv		-+		-	_	一	₹ :
-		8	\dashv											\Box	\Box	\Box	
-	94	3	\Box	\Box	7		0	×	S X	0	<u> </u>	~}	-+		-+	ᅱ	
	/ VG	9	+	-			2 X		त्र	62 X	त				二	コ	
	AFSC / AGE	34 35 56 57 59 59 60 61 62 63 64 65	二	二	二		42	73	462	ود	3462X	\Box	二	\neg	-1		
		3	\dashv	-+	-+		14	24	7	34	꼾				\dashv		
-	z	51 52 53	_	_									\Box		\Box	\Box	
	eqyl . faid	5	\Box	\Box			=	7	9	긜	291				-+		
	* \$	05 63	+				7	29	7	29	त					ゴ	
_	` >	3		\Box					-				_				٠.
	2	6 67			-+		24	20	25	9	30	-	\dashv			\exists	5
	HOURS (Tenths)	97 97	-												\Box	\Box	<u>_</u>
	9.5	3		_										{	-+	\dashv	8
-		2 2	-	+	-											コ	RA B
•	Ytivoir	Ŧ	=	3	=	=	=	=	3	3	31	31	3	3	등	3	
	Release Type Task	8	n	3	3	3	3	3	•••		•••	-153	-17			"	ž
•		1	۵	0											_	_	PUNCH CARD TRANSCRIPT
	ي څ	34 35 36 37	3	2						├─ ┤		-					Ē
	NCLOK Clock p		0	0											\Box	\Box	
	žů	3	0	9	\dashv		 -						-	-		1	
		32 33			{			20	3	m	3				\Box	\Box	
	, <u>.</u>	5		\Box				N				-		\vdash			ı
	SBF or	3	\vdash					-		H							
	MSBF	1				_								_			1
	eboM.le2	1	A	A	A	_	0	l III	ш	ш	E	Ü	a	7	Ü	ਹ	
•	<u> </u>	23.3								\Box					0	\Box	
		1	75	76	77		28	<u>'</u>	-	-	<u> </u>	-	<u> </u>	79) 80		
	2	F	0	0	90		007	二						90	Ŏ		
		ē	0	10	3	-	5	-		-	├	├	-	금	5		
	2	-	ב	-7	1			1_									
		E				7	TL	. 0	F	F		ш	2	-	8	Ф	
		-	7	T 3	Τ4	F	a	. 2			04	Z	ਹ	5	88	5	E USE
	3	E	Σ	SZ OZ	Ξ	ত	E	0	8	SE	BA	HGNBN	<u>a</u>	극	7	님	ş
	,	-	DCRM	뽕	2	8	50	3 5	U) U	ট	ট	ਹੁ	AL	4	A	2
	104	12	A	<u>၁</u>	A	=	=		=		Ξ	=	=	य	ਹ	ਹ	E
-		Ta	7	T	3	6	-		0	00	200	200	1	10	200	O	S A
_		10		1 -/	1	6	2	7	10	10			5	1	Ž	00	2 E
# ¥		900	7	6	1,								1 40	. 42			
FORM 1		01 0 a	007	5000	Š	S		10	S	3 8	3	10	O	10	8	8	Ž.
No. 2 ID FORM 1		TION NOGE	7007	5007		4007) C	<u> </u>	S	0		9	00 5	5	500	50080	PREVIOUS EDITIONS OF THIS FORM WILL BE USED UNTIL STOCK IS EXHAUSTED.
IT No. 2 NDED FORM 1		4 7 8 0 10 11 12 13 14 15 16 17 18 19 20 21 22 24 25 26 27 28 79 30 31 32	1	5007		100	7 5	<u> </u>	7	0	705	90	h	5	100	505	ł
IPUT No. 2 TENDED FORM 1				5007		100	7 1	<u> </u>	7	0	505	200	h	5	1900	505	ł
INPUT No. 2 EXTENDED FORM 11				5000		1	7 1	<u> </u>	7	0	705	200	o h	5	700	700	ł
INPUT No. 2 EXTENDED FORM 1				5007		1) C	<u> </u>	7	0	500	b	0 h	5 5	1500	005	AF FORM 1530 PREVIOUS

75 KH

Figure 14. Example of mode 4 thru flight to postflight network coding (continued),

								-			-					_	
uoj.	N AFSC / AGE	3		_	-+				-+	→	-+		+	-+	-+	{	
_		٤	_4		-+				-	-+		-+	-+		+	-	
	3	2		_	_			\rightarrow	-	\rightarrow	-+	-+	-+			-4	
	3	4			_			-4					-+			{	
•	Š	2		_4				-+	-	∸ ∔	-		-				
_	₹	2			_				_	-+		-+	-	-+			
_	Z	7			_					-+		┷					
_		2							}								
_		Z			_			_					-				
	9	7						-		 -	ŀ	-	-+			_	
	3	2			_			7116									
	Š	\$				ن ا		3		_4			-				
	₹	3							_	_							!
-	Z	3		\Box				_	_	_					_		۰
-		3											_	_	_		8
-		3	F											0	┷-┤	<u></u>	AFLC-WPAFB-JAN 74 500
	AFSC / AGE	60 61 62 63 64	Y					₹						22			Ì
		3	<.				B	_1									PAF.
	Š	3	2				7	3	1					_			*
	₹	5	ਹ				1	24					_	7			ñ
-	Z	8	K				1	3					_	7			`
-		8	IR		\Box			\Box		أبين	لبر			اب			ł
-		3	₹			F		=	_	S	0	-		21		<u> </u>	ł
	9	2		\Box		2	×	×	₹	N	N	K		R			l
		2	1			Q	_	~	_	73	7		╧╅	3		-	
	AFSC / AGE	8	RT		1	7	3	3	3	<u>د</u>	•	M		7			1
	7	en l	W			A	4	4	4	9	7	4		4			
-	z	2	7				5	3	-	8	4			तं			ı
-		2	¥	\neg		F											ļ
•	eqvī . tziQ	Ē		7		₹	-4	-4	7	7	L	7	_	1			ļ
-		0	F			B	9	0	6	0-	9	6	29	29			Į
	* \$	•	I		· ·	E	n	K	n	N	7	3	2	7		<u> </u>	j
	. >	3	GHT			B							I]
•	·	2	H		_	ਹ		R	5	1	त	-	_	1		L	l
		_	7													Ĺ	I
	HOURS (Tenths)	9	F			3											=
	_ 5 5	3	E			Q											
	= 5	3	2			7											ÌŘ
•		8	PRE		_	ALR	-										}ੇ \$
•	Missir	Ę	-		=	-	-		1		=		J	1	1]=
	Type Task	8	_	3	-		M	3	3	3	3	3	M	3	3	3/]2
		. •															
	0200107	ĪΞ															3
	espeles	8	0		0	0	0	۵	ರ	0	ත	0	0	0	0	0	5
		38	0			0		α /	0 /	/ 0	2			1	-	0	NCH CA
		38	~	0		0/0		α / p	0/10	4/	3	10	7	10	8	0 / 0	PUNCH CARD TRANSCRIPT
•		38	~	0 1 0		_	0		_	1	100	10	7	100	000	0 / 00	PUNCH CA
•		38	000		0000	3	0000	0	~	4/	3			10	8	0 / 00 0	PUNCH CA
	NCLOK NCLOK NCLOK	34 35 36 37 38 39	1000	0 1 0	DQ1	00	0000	/pp	100	oo,	100	10	7	100	000	0 1000	PUNCH CA
		33 34 35 36 37 38 39	1000	0 1 0	DQ1	00	0000	/pp	100	oo,	100	10	7	100	000	0 /000	PUNCH CA
:	NCLOK Clack No.	32 33 34 35 36 37 36 39	1000	0 1 0	DQ1	00	0000	/pp	100	oo,	100	10	7	100	000	0 /000	PUNCH CA
:	NCLOK Clack No.	32 33 34 35 36 37 36 39	1000	0 1 0	DQ1	00	0000	/pp	100	oo,	100	10	7	100	000	0 /00 0	PUNCH CA
:	NCLOK Clack No.	32 33 34 35 36 37 36 39	1000	0 1 0	DQ1	00	0000	/pp	100	oo,	100	10	7	100	000	0 / 0 0 0	PUNCH CA
	BF or NCLOK	29 30 31 32 33 34 35 36 37 38 39	7000	0 1 0	DQ1	00	0000	/pp	100	oo,	100	10	7	100	000	0 / 0 0 0	PUNCH CA
:	NCLOK Clack No.	29 30 31 32 33 34 35 36 37 38 39	7000	0 1 0	DQ1	00	0 0 0 0	1000	/ 000	1000	1000	1000	1000	1000	000		PUNCH CA
	BF or NCLOK	27 28 29 30 31 32 33 34 35 36 37 38 39	7000	0 1 0	DQ1	000	0/000	/pp	100	oo,	100	10	7	100	000		PUNCH CA
:	MSBF or NCLOK	26 27 28 29 30 31 32 33 34 35 36 37 36 39	7000	000010	1000	00	0/000	1000	000	7000	1000	10001	(p)	1000	5	A	
	MSBF or NCLOK	26 27 28 29 30 31 32 33 34 35 36 37 36 39	7000	000010	1000	000	0/000	1000	/ 000	1000	1000	1000	2 12 1 1 10 d	7000 Q &	9 5	A	
	MSDE or NCLOK	26 27 28 29 30 31 32 33 34 35 36 37 36 39	7000	000010	1000	000	01000	12 0 001	13 0	14 0	1000 C S	1000	1000	18 0	19 5	20 D	
	MSDE or NCLOK	26 27 28 29 30 31 32 33 34 35 36 37 36 39	7000	000010	1000	000	0/000	2 D	000	R14 D	1000	10001	2 12 1 1 10 d	R18 D	9 5	20 D	
	MSDE or NCLOK	26 27 28 29 30 31 32 33 34 35 36 37 36 39	7000	0 000 10	1000	000	LR11 D	1R12 D 0 ag/	12813 D 0001	LR14 D 000/	1 2 D	LR16 D 0001	1217 D	LR18 D	1819 5	LR20 D	
	MSDE or NCLOK	26 27 28 29 30 31 32 33 34 35 36 37 36 39	7000	R02 C 00010	1000	000	01000	R12 D 0 001	R13 D 0001	R14 D	1000 C S	LR16 D 0001	1000	R18 D	19 5	LRZO D	
	MSBF or NCLOK	20 21 22 22 24 25 26 27 28 20 30 31 32 33 34 35 30 37 38 30	7000	1 RO2 C 00010	1000	000	LR11 D	1R12 D 0 ag/	12813 D 0001	LR14 D 000/	1 2 D	LR16 D 0001	1217 D	LR18 D	1819 5	LR20 D	
	MSDE or NCLOK	20 21 22 22 24 25 26 27 28 20 30 31 32 33 34 35 30 37 38 30	7000	ALRO2 C 00010	1000	000	LR11 D	ALR12 D 0 001	ALR13 D 0001	ALR/4 D	1 2 D	LR16 D 0001	ALRIO D DOO	A L R S D	ALR19 5	ALRZO D	
	MSDE or NCLOK	20 21 22 22 24 25 26 27 28 20 30 31 32 33 34 35 30 37 38 30	7000	ALRO2 C 00010	2000	7	1 ALR 11 D	P ALR12 D 0 001	N ALR13 D	L ALR14 D	1 ALRIS D 0001	1 ALRIG D 0001	L ALRID D DOO	ALR18 D	ALR 9 5	ALRZO D	
	Moser or NCLOK	20 21 22 22 24 25 26 27 28 20 30 31 32 33 34 35 30 37 38 30	7000	1 RO2 C 00010	2000	7	1 ALR 11 D	P ALR12 D 0 001	N ALR13 D	ALRIA D	ALRIS D	SL ALRIG D 0001	IL ALRID D DOO	ALR18 D	ALR 9 5	ALRZO D	
	Moser or NCLOK	20 21 22 22 24 25 26 27 28 20 30 31 32 33 34 35 30 37 38 30	7000	3 ALRO2 C 00010	5	7000	1 ALR 11 D	P ALR12 D 0 001	N ALR13 D	ALRIA D	ALRIS D	SL ALRIG D 0001	IL ALRID D DOO	ALR18 D	ALR19 5	ALRZO D	
	MSDE or NCLOK	20 21 22 22 24 25 26 27 28 20 30 31 32 33 34 35 30 37 38 30	7000	1113 ALR02 C 00010	5	7	LR11 D	WAR ALRIZ D	LRCK ALR13 D	ALRIA D	RMAL ALRIS D	NGSL ALRIG D	AXIL ALRID D DOO	UNAL ALRIS D	ALR19 5	ALRZO D	
	Moser or NCLOK	20 21 22 22 24 25 26 27 28 20 30 31 32 33 34 35 30 37 38 30	7000	ALLL3 ALR02 C 00010	5	7	1 ALR 11 D	TOWAR ALRIZ D 0 0001	ALRCH ALRIS D	DODAL ALRIAD	RMAL ALRIS D	NGSL ALRIG D	TAXIL ALRID D DOO	UNAL ALRIS D	ALR19 5	ALRZO D	
	Moser or NCLOK	20 21 22 22 24 25 26 27 28 20 30 31 32 33 34 35 30 37 38 30	7000	ALLL3 ALR02 C 00010	5	7	OWAL ALRII D	WAR ALRIZ D	LRCK ALR13 D	DODAL ALRIA D	ARMAL ALRIS DI	NGSL ALRIG D	AXIL ALRID D DOO	ALR18 D	ALR19 5	ALRZO D	
	Model Model	12 13 14 15 14 17 14 19 20 21 22 22 22 24 25 24 27 28 29 30 31 32 33 34 35 30 37 38 39	7000 H	1113 ALR02 C 00010	200000	7000	STOWAL ALRII D	STOWAR ALRIZ D	HALRCK ALRIS D	BLODAL ALRIA D	BARMAL ALRIS DI	HENGSIL ALRIG DI	STAXIL ALRIND D 000,	HRUNAL ALRIS D	ALR19 5	HIRLINMS ALRZO D	S OF THIS FORM WILL BE USED NUMBTED.
	ACT MSPF or NCLOK	0 11 12 13 14 13 14 17 18 19 20 21 22 22 28 28 27 28 29 30 31 32 33 34 35 36 37 38 39	7000 H	1 CALLL3 ALROZ CI 100010	200000	7000	TOWALL ALRII D	STOWAR ALRIZ D	ALRCH ALRIS D	BL CDAL ALRI4 D	RMAL ALRIS D	S HENGSL ALRIG DI	TAXIL ALRID D DOO	HRUNAL ALRIS D	ALR: 9 5	HIRLINMS ALRZO D	S OF THIS FORM WILL BE USED NUMBTED.
RM 11	ACT MSPF or NCLOK	0 11 12 13 14 13 14 17 18 19 20 21 22 22 28 28 27 28 29 30 31 32 33 34 35 36 37 38 39	7000 H	011 CALLE 3 ALRO2 C 00010	200000	7000	O CHEMAL ALRII D	11 STOWAR ALRIZ D	12 HALRCK ALRIS D	13 BL CDAL ALRIA D	14 BARMAL ALRIS D	S HENGSL ALRIG D	16 STAKIL ALRIND	THELINAL ALENS D	ALR19 5	HENDER ALRZO D	S OF THIS FORM WILL BE USED NUMBTED.
2 ORM 11	ACT MSPF or NCLOK	0 11 12 13 14 13 14 17 18 19 20 21 22 22 28 28 27 28 29 30 31 32 33 34 35 36 37 38 39	7000 H	ROII CALLL 3 ALROZ C 00010	802 20000	T.	RIO STOWNALL ALRII D	RIII STOWAP ALRIZ D	12 HALRCK ALRIS D	RIS BLODAL ALRIA D	RIGIRARMAL ALRIS D	S HENGSL ALRIG D	STAXIL ALRIND D 000,	THELINAL ALENS D	ALR19 5	HENDER ALRZO D	S OF THIS FORM WILL BE USED NUMBTED.
FORM 11	ACT MSPF or NCLOK	0 11 12 13 14 13 14 17 18 19 20 21 22 22 28 28 27 28 29 30 31 32 33 34 35 36 37 38 39	7000	011 CALLE 3 ALRO2 C 00010	1802 200000 5	7	O CHEMAL ALRII D	RIII STOWAP ALRIZ D	RIZ HALRCH ALRI3 D	LRIS BLODAL ALRIA D	LRIA BARMAL ALRIS D	LRIS HENGSL ALRIG DI	LRIG STAKEL ALRIS D DOO	LRIP HRUMAL ALRIS D	ALR19 5	HENDER ALRZO D	S OF THIS FORM WILL BE USED NUMBTED.
No. 2 ID FORM 11	ACT MSPF or NCLOK	0 11 12 13 14 13 14 17 18 19 20 21 22 22 22 24 25 24 27 28 29 30 31 32 33 34 35 36 37 38 39	7000	ROII CALLL 3 ALROZ C 00010	1,802 20000 5	7	RIO STOWNALL ALRII D	LRIII STOWAR ALRIZ D	LRIZ HALRCH ALRIS D	LRIS BLODAL ALRI4 D	LRIA BARMAL ALRIS D	LRIS HENGSL ALRIG DI	LRIG STAXIL ALRIS D DOO	LRIT HRUMAL ALRIS D	LRI S ALRI 9 S	HENDER ALRZO D	S OF THIS FORM WILL BE USED NUMBTED.
No. 2 DED FORM 11	ACT MSPF or NCLOK	12 13 14 15 14 17 14 19 20 21 22 22 22 24 25 24 27 28 29 30 31 32 33 34 35 30 37 38 39	7000	1 RO 1 CALLL 3 ALRO2 C 00010	1,802 20000 5	7	I RIO CITOMAL ALRII D	LRIII STOWAR ALRIZ D	LRIZ HALRCH ALRIS D	LRIS BLODAL ALRI4 D	LRIA BARMAL ALRIS D	LRIS HENGSL ALRIG DI	LRIG STAKEL ALRIS D DOO	LRIP HRUMAL ALRIS D	ALR19 5	HENDER ALRZO D	FERTOLIS ESTIMATE FORM WILL BE USS ¹⁰ WITH STOCK IS DRAWGETD.
UT No. 2 ENDED FORM 11	ACT MSPF or NCLOK	Prior Node	7000	1 RO 1 CALLL 3 ALRO2 C 00010	1,802 20000 5	7	I RIO CITOMAL ALRII D	LRIII STOWAR ALRIZ D	LRIZ HALRCH ALRIS D	LRIS BLODAL ALRI4 D	LRIA BARMAL ALRIS D	LRIS HENGSL ALRIG DI	LRIG STAKEL ALRIS D DOO	LRIP HRUMAL ALRIS D	ALR19 5	HENDER ALRZO D	FERTILISE EXTRODES OF THIS FOLIA WILL BE USS ⁵⁰ UNIT STOCK & EDWARDTE.
4PUT No. 2 (TENDED FORM 11	ACT MSPF or NCLOK	Frior Toda	7000	1 RO 1 CALLL 3 ALRO2 C 00010	1,802 20000 5	7	I RIO CITOMAL ALRII D	LRIII STOWAR ALRIZ D	LRIZ HALRCH ALRIS D	LRIS BLODAL ALRI4 D	LRIA BARMAL ALRIS D	LRIS HENGSL ALRIG DI	LRIG STAKEL ALRIS D DOO	LRIP HRUMAL ALRIS D	ALR19 5	HENDER ALRZO D	FERTILISE EXTRODES OF THIS FOLIA WILL BE USS ⁵⁰ UNIT STOCK & EDWARDTE.
INPUT No. 2 Extended form 11	ACT MSPF or NCLOK	Prior mode	7000	1 RO 1 CALLL 3 ALRO2 C 00010	1,802 20000 5	7	I RIO CITOMAL ALRII D	LRIII STOWAR ALRIZ D	LRIZ HALRCH ALRIS D	LRIS BLODAL ALRI4 D	LRIA BARMAL ALRIS D	LRIS HENGSL ALRIG DI	LRIG STAKEL ALRIS D DOO	LRIP HRUMAL ALRIS D	ALR19 5	HENDER ALRZO D	Foun 1530 Vent stock as the soul wit it uses in a set 1530 Vent stock as the set 1530 Vent stock as th
INPUT No. 2 EXTENDED FORM 11	ACT MSPF or NCLOK	Prior region 2 2 2 2 2 2 2 2 2	7000	1 RO 1 CALLL 3 ALRO2 C 00010	1,802 20000 5	7	I RIO CITOMAL ALRII D	LRIII STOWAR ALRIZ D	LRIZ HALRCH ALRIS D	LRIS BLODAL ALRI4 D	LRIA BARMAL ALRIS D	LRIS HENGSL ALRIG DI	LRIG STAKEL ALRIS D DOO	LRIP HRUMAL ALRIS D	ALR19 5	HENDER ALRZO D	FERTILISE EXTRODES OF THIS FOLIA WILL BE USS ⁵⁰ UNIT STOCK & EDWARDTE.
INPUT No. 2 EXTENDED FORM 11	ACT MSPF or NCLOK	Prior region 2 2 2 2 2 2 2 2 2	7000	1 RO 1 CALLL 3 ALRO2 C 00010	1,802 20000 5	7	I RIO CITOMAL ALRII D	LRIII STOWAR ALRIZ D	LRIZ HALRCH ALRIS D	LRIS BLODAL ALRI4 D	LRIA BARMAL ALRIS D	LRIS HENGSL ALRIG DI	ALRIG STAKEL ALRIS D	LRIP HRUMAL ALRIS D	ALR19 5	HENDER ALRZO D	Four 1530 terrota controls or has roan wit. Re used in a four a source to the roan with the used in a force to source the source to the real transfer to the source to the real transfer transfer to the real transfer transfer to the real transfer transfe

granies.

Figure 15. Example of alert mission network.

NAME OF

Figure 15. Example of alert mission network (continued).

In this scenario aircraft are put on alert for 24 hour periods. Before an aircraft goes on alert it is preflighted, loaded, (but not armed) and towed to the alert pad. The towing takes .3 hours by a crew of five. Two 431X1s drop off after .1 hour when the aircraft is out of the congested area. and two of the alert crew chiefs take their place to help park the plane in the alert area. The alert crew chief assigned to the aircraft does a .5 hour check to accept it for alert. Two 462ZO munitions loaders then arm the aircraft in .2 hours. For alert aircraft, engine start (launch) requires only .1 hour, taxi .1 hour, and end of runway check .1 hour. After flying, alert aircraft go through the same sequence of end of runway check, taxi to the parking area, recovery, and fueling in the parking area. If nothing is broken they are then towed back to the alert area where they are given a thruflight inspection by the alert crew chief and loaded. Load and thruflight are at last partly concurrent, and load may be done by a double crew in half the normal time. If the aircraft returns needing some corrective maintenance it is not towed to the alert pad, but repaired and given a postflight in the parking area. Another available aircraft is loaded and towed to the alert pad to replace it.

Since a new aircraft may be run into alert at any time, the presortie tasks in an alert mission network should follow directly from the last network that aircraft had completed. This would be either a mode 1 mode 2 scheduled mission network. The same alert network should also apply to an alert aircraft that returns in good shape and goes back on alert. When one alert network is used for both conditions load and tow tasks cannot always be shown in the correct sequence.

An alert mission network is shown in Figure 15. It is mode 3 since preflight and postflight are in separate networks. If various missions are flown from alert more than one network might be required, but they would all be mode 3 and would follow the same general logic. The network in Figure 15 shows the aircraft towed to the alert pad, checked by the alert crew chief, loaded by a double crew, and armed. If the aircraft is coming onto alert after preflight, or is being run in as a replacement, the network has load and tow in the wrong order. This is not significant since it does not affect the time to get the plane on alert or the resources demanded. If the aircraft came off a previous alert mission, the alert crew chief's time for thruflights is only partly covered in the check shown in the network. But turn time for the alert aircraft is about correct since at least part of the thruflight can be done in parallel with load. The alert crew chief's time is not a relevant output since he is dedicated for the full shift anyway. Alert crew chiefs are coded 431A1 in the network. No decrements or unscheduled maintenance calls are shown before alert sorties because the aircraft have been kept cocked and ready by the dedicated crew chief. The DCRMT5 task after the sortie advances all clocks a full sortie. The X tasks interrogate the failure clocks and send the aircraft to postflight and corrective maintenance only if something is broken. None of the post sortie tasks involve 431Als, and all were previously defined in other networks, so times and resources are not shown.

This example network does not precisely duplicate all the given assumptions, but it does capture the correct aircraft turnaround times, demands for resources, and working time that are needed to make mission accomplishment and manning predictions. A different network and choice of simplifications might be needed to obtain other kinds of unbiased output.

Networks for Peacetime Flying

Examples of preflight and hangar networks with dummy sortie tasks are shown in Figure 16. They match the operation schedule shown in Figures 9 and 10, Section II. The Form 20 lead time for the dummy preflight sortie must be greater than the 3.6 hour elapsed task time for preflight, and allow for variability. The task time entered for hangar on the extended Form 11 must be sufficient to hold the aircraft from the time scheduled on the Form 20 until the end of the day. Figure 16 shows a time of 19.5 hours, which corresponds to the Form 20 scheduled time of 0430 for the dummy hangar mission. Task type 5 is entered in column 40 on the hangar task. This code is a catchall for time that an aircraft is tied up other than services, maintenance, or flying.

Mode 3 mission networks represent first flights of the day when preflight is networked separately. The Form 20 lead time for these flights must be greater than the sum of presortie task times in the mode 3 network but does not have to cover preflight. Figure 16 shows an example mode 3 carrying air to air rockets. In this case DCM3 was the first network entered, so all task time and resources were defined on the extended Forms 11. This network shows towing the aircraft to a safe area for rocket or missile loading. This is generally a CONUS peacetime procedure. In wartime, each aircraft parks in a revetment for all servicing and loading.

IV. CORRECTIVE MAINTENANCE NETWORKS

Content and Data Sources

The networks covering unscheduled corrective maintenance tasks are organized by subsystem. They are called from the main networks via the failure clock mechanism explained in Section I. Each network must start with a failure clock and parameter value of mean sorties between maintenance actions. This controls the frequency with which the network tasks will be processed. It must cover all the times a specialist is called to the airplane in the field to fix an apparent problem, including cases where only some minor adjustment is required or the system checks out OK. This definition of maintenance frequency differs substantially from reliability measures of failure that consider only confirmed breakage under controlled test conditions.

INPUT No. 2 EXTENDED FORM 11	-	-		- 3	-	-	<u>-</u>	- - -		_		-	noit
134	2	Sel. Mod	NCLOK Clock No.	lant eqyt Ytivoirf	HOURS (Tenths)	* \$ eqy7.1sig			FSC / AGE	Z	AGE.	(AFSC / AG	R PUNITOD
Prior Node	6 19 20 21 22 29 24 25	26 27 28 29 30 31 32	38	40 41 42	•	1 49 50 51 32	53 54 55 54 57 54	3	60 61 62 63 64 65	10 99	727 27 17 07 09 34	74 75 76 77 7	78 79
	#	_	0/000	M	MORNING	6 PRE	FLIGH	Ē					\exists
JO001 CAL123	50002	ບ	0/000	3/									7
113 UPRFL		A	0/000	3//	36	765	1/43/	XII II	D60	112.4	DER		
ALLES HI BXS	0 4	•	0	3/2	R	762	2431X	I	LCART				
ALLIS HINARS		A	0	3	7	762	24311	71 1 X	MCART				
0002		8	00010	3/									7
	T		0000	Do	DCM3 FIT	RST	FLIGHT	F	# THRUF	4	TE		7
S S S S S S S S S S S S S S S S S S S	50012		00010	31	3	762	5431X	Ž					
0 0 1 2 BL	7001	A	0	31,1	9	701	4962	20					=
3H E 1 00	7001	A	0000	31	8	762	1/431						
1 DC RM	50015	A	001	3									7
SICALLS	8	ਹ ਹ	07000	3//									
CALL	-	.	01000	3//									7
CALLS	7007	บ	0/000	311									
OF THIS FORM WILL RE USE			PUNCH C	PUNCH CARD TRANSCRIPT	SCRIPT			144	AFLC-WPAFB-JAN 74 500	200			
							٠						
					:				٠.		٠.		
	-											-	
	Figu	Figure 16. Example of mode	က	ork coded	network coded with preflight and hangar dummies.	ght and h	angar dummi	.65.			į.	:	
		,			·			-				1 - 1 - 2° - 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1	
					٠.			:				. 200	
									.,	. :			

42.

Figure 16. Example of mode 3 network coded with preflight and hangar dummies.

	A A A !!!	-		+		_	T	_		~	_				-	_	
u	<u>oitevnitno</u>	<u> </u>	 -	├	-	├	├-	-	-	╁	-		-	-	_	-	l
	Ę	惿	一		_	 				1		 	-	-		┝	
		E															
	7	k			-	 	34		_	<u> </u>	-		-	ļ	ļ		1
		1	┼	-	 -	_	=			1	-	_	├	 	 -	-	
		2															
		72							Ŀ								l
	•	-	├	 	├	<u> </u>	5		├-	<u> </u>		 	├-	-	-	H	1
	AFSC / AGE	1	├-		-	-	3	_	-	 	-	-	-	-	\vdash	\vdash	1
		67 66 69 70 71 72 73 74 75 76 77 78					090				134						1
	z	•			_						-						
		3		0		0		ļ	├	-		 		-	 -	· ·	8
		3	_	Q	-	~	2/X3	┢	_	-	_	-	├─		\vdash	<u> </u>	ž,
	3	3		62		73	5				0						Į.
	AFSC / AGE	39 60 61 62 63 64 65		=	<u> </u>	3	12		_	 	7	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	AFLC-WPAFB-JAN 74 500
		9	-	74	├-	24	14		-	-	=	 	├-	-	-	-	ş
																	•
		3									1						
	9	6 37	-	18		8	×	X /	×	-	×	 				 	
	AFSC / AGE	54 55 56 57 58		31		3	3	31	31		3		_	\vdash	 		ı
		3		24.		4	4	4	4		4						
	z		-	7	<u> </u>	_	_	~	7	ļ —	_	ļ	<u> </u>	<u> </u>			
	edyl . faid	15	7				-	7	7	-	J	-	-	\vdash	-		ŀ
		2	6	76		76	76	6	6		76						Ì
	* \$	\$	7	7		7	त	7	7		7						
		47 44	~	7	-	_	R	1	R		8	-	-	-	-		ł
	w 🖺								•		7					•	
	HOURS	44 45 46															Ы
	¥ è	43 44	L	-	-	_		_	_						<u> </u>		3
		42	-	_							-		-				ASS
	Missir	4	И	1	1			_									1 8
	Type Task	40	3	3	~	3	3	3	3	3	(3)	3	B	3		1	0
	Atpalay			•••			-14							•••			¥
	espeleA	8,	O.	0	0	0	0	0		2	O	0	0				H CAR
		36	0/	0/	7	0/	10	0 /	0	0 /	01	10	/ d	10			INCH CAR
		36	0/	0/	7	0/0	10	010	01/0	0/0	010	010	di d	10			PUNCH CARD TRANSCRIPT
		36			100	0/		0 /	oldio	0000	01	10	di d	10			PUNCH CAR
		33 34 35 36 37 38 39	0010	0000	7	00100	0010	0010	01/0	0/0	00100	00100	/ d				PUNCH CAR
	NCLOK Clock No.	33 34 35 36 37 38 39	0010	0000	100	00100	0010	0010	oldio	0000	00100	00100	di d	10			PUNCH CAR
	NCLOK Clock No.	33 34 35 36 37 38 39	0010	0000	100	00100	0010	0010	oldio	0000	00100	00100	di d	10			PUNCH CAR
	or NCLOK bility . Clock No.	33 34 35 36 37 38 39	0010	0000	100	00100	00010	0010	oldio	0000	00100	00100	di d	10			PUNCH CAR
	BF or NCLOK	29 30 31 32 33 34 35 36 37 38 39	0010	0000	100	00100	00010	0010	oldio	00100	00100	00100	di d	10			PUNCH CAR
	MSBF or NCLOK	29 30 31 32 33 34 35 36 37 38 39	0000	0/000	1000	0000	00010	000010	00/000	0/000	0000	0000	00010	01000			PUNCH CAR
	BF or NCLOK	25 26 27 28 29 30 31 32 33 34 35 36 37 38 39	0010	D 000/0	100	00100	00010	0010	D	D	00100	00100	c	10			PUNCH CAR
	MSBF or NCLOK	14 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39	0 000 D	D 000/0	1/0000	2 0	D 00010	4 D	5 D 00 a/ 0	6 D	0000	00010	2 19 1 20 0 1 9	01000			PUNCH CAR
	MSBF or NCLOK	14 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39	0 000 D	D 000/0	1/0000	2 0	23 D	24 D	25 D	6 D	0000	22 0 000 0	27 19	01000			PUNCH CAR
	MSBF or NCLOK	14 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39	0/000	020 D 00010	1/0000	0/000	D 00010	4 D	5 D 00 a/ 0	026 12	0000	22 0 000 0	27 19	01000			PUNCH CAR
	MSBF or NCLOK	20 21 22 22 24 24 25 26 27 28 29 30 31 32 33 34 38 36 37 38 39	0 000 D	D 000/0	1000	0/22 0 0 0 0 0 0 0 0 0 0	023 D 00010	024 D 00010	25 D	6 D	0000	00010	2 19 1 20 0 1 9	01000			PUNCH CAR
	MSBF or NCLOK	20 21 22 22 24 24 25 26 27 28 29 30 31 32 33 34 38 36 37 38 39	0/000	020 D 00010	1/0000	0/22 0 0 0 0 0 0 0 0 0 0	-0023 D 00010	0024 D 00010	0025 D 00 0 10 0	0026 0 00010	0000	0027 6 00010	27 19	01000			PUNCH CAR
	MSBF or NCLOK	20 21 22 22 24 24 25 26 27 28 29 30 31 32 33 34 38 36 37 38 39	0/000	020 D 00010	150021 5 10001	Jao22 D	1 7 0 0 2 3 D 0 0 0 1 0	v J0024 D 00010	0 J0025 D	1 Joo26 D		0027 6 00010	1 50027 19 19 100010				
	Mext Node 9 Probability Clock No.	20 21 22 22 24 24 25 26 27 28 29 30 31 32 33 34 38 36 37 38 39	II J0019 D 00010	1 Joogo D 000/0	0 50021 5 0001	M2 Jao22 D	12 Jac23 D 00010	01 J0024 D 00010	00 J0025 D 000 10	72 JOO26 D	72 D O0010	S1 50027 10 100010	58 Joban 19 19 10 100010	59			
	Mext Node 9 Probability Clock No.	20 21 22 22 24 24 25 26 27 28 29 30 31 32 33 34 38 36 37 38 39		1 Joogo D 000/0	0 50021 5 0001	NW2 Jao22 D	x12 Jao23 D	C 0 1 JOO24 D 00010	00 J0025 D 000 10	MTZ JOO26 D	72 D O0010	151 Jao27 C	158 Joban 19 10 10 100010	159			
	MSBF or NCLOK	20 21 22 22 24 24 25 26 27 28 29 30 31 32 33 34 38 36 37 38 39	AXII J0019 D 00010	UNWIL JOO20 D 00010	0 50021 5 0001	UNMA JOSZZ D GOOTO	AXIZ 50023 D 00010	REC 01 JOO24 D 00010	AS200 JOO25 D 00010	CRMTZ JOOZE D DOOD 10	PSTZ D D OO010	11511 Jao27 6 1 00010	1 1 1 2 1 2 1 2 1 2 1 3 1 3 1 3 1 3 1 3	159			
	Mext Node 9 Probability Clock No.	20 21 22 22 24 24 25 26 27 28 29 30 31 32 33 34 38 36 37 38 39		1 Joogo D 000/0	150021 5 10001	NW2 Jao22 D	x12 Jao23 D	C 0 1 JOO24 D 00010	0 J0025 D	MTZ JOO26 D	72 D O0010	151 Jao27 C	158 Joban 19 10 10 100010	59			
n	A Next Node	20 21 22 22 24 24 25 26 27 28 29 30 31 32 33 34 38 36 37 38 39	57AXII 50019 D 00010	HRUNMI JO020 D 00010	1 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	RUMMA JOSZZ D GOGIO	JTAXIZ J 0023 D 00010	HREC DY JOOZA D 00010	GAS200 J0025 D 00010	DCRMTZ JOOZE D OOD 10	HTPST2 D 00010	CALLS1 50027 C 00010	CALL 58 JOO27 C	CALLS9			
	A Next Node	20 21 22 22 24 24 25 26 27 28 29 30 31 32 33 34 38 36 37 38 39	18 5TAXII JOO19 D 00010	9 HRUNMI JOOZO D 100010	1 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	1 HRUMMA JOSZZ D GOGIO	2 JTANIZ JOO23 D	3 HREC dv JOO24 D 00010	24 GASZOO JOOZS D 00010	S DCRMTZ JOOZE D 00010	6 HTPST2 D 00010	6 CALLS1 JOOZD C 100010	27 CALLS/8 JOO27 C	8 CALLS9			
	A Next Node	8 9 10 11 12 13 14 13 14 17 18 17 18 19 20 21 22 22 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39	18 5TAXII JOO19 D 00010	19 HRUNWII JOO20 D 00010	1 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	O21 HRUMM2 Jao22 D GOO10	022 JTAXIZ JO23 D 00010	023 HREC 01 JO024 D 00010	024 GAS200 JO025 D 00010	S DCRMTZ JOOZE D 00010	026 HTPST2 D 00010	6 CALLS1 JOOZD C 100010	27 CALLS/8 JOO27 C	028 CALLS9			
	A Next Node	8 9 10 11 12 13 14 13 14 17 18 17 18 19 20 21 22 22 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39	0018 STAXII JOO19 D 00010	0019 HRUMMI JO020 D 00010	10000 S 12000 00000 = 0200	ODZI HRUMMZ JOSZ D OZZIO	0022 JTAXIZ JO23 D 00010	0023 HREC 01 J0024 D 00010	0024 GAS200 JOO25 D 00010	obas DCRMTA JODAG D 100010	0026 HTPST2 D 00010	0026 CALLS1 JO027 C 00010	2 CALLS8 JOO22 C	0028 CALLS9 C			PREVIOUS EDMICHS OF THIS FOUN WILL BE USED UNIT STOCK IS EDMINISTED.
	A Next Node	6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 22 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39	18 5TAXII JOO19 D 00010	19 HRUNWII JOO20 D 00010	1 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	O21 HRUMM2 Jao22 D GOO10	022 JTAXIZ JO23 D 00010	023 HREC 01 JO024 D 00010	024 GAS200 JO025 D 00010	S DCRMTZ JOOZE D 00010	026 HTPST2 D 00010	6 CALLS1 JOOZD C 100010	27 CALLS/8 JOO27 C	028 CALLS9		\dashv	PREVIOUS EDITIONS OF THIS FOUN WILL BE USED UNTIL STOCK IS EXHAUSTED.
	A Next Node	8 9 10 11 12 13 14 13 14 17 18 17 18 19 20 21 22 22 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39	0018 STAXII JOO19 D 00010	0019 HRUMMI JO020 D 00010	10000 S 12000 00000 = 0200	ODZI HRUMMZ JOSZ D OZZIO	0022 JTAXIZ JO23 D 00010	0023 HREC 01 J0024 D 00010	0024 GAS200 JOO25 D 00010	obas DCRMTA JODAG D 100010	0026 HTPST2 D 00010	0026 CALLS1 JO027 C 00010	27 CALLS/8 JOO27 C	0028 CALLS9 C		\dashv	PREVIOUS EDITIONS OF THIS FORM WILL BE USED UNTIL STOCK IS EXMANSTED.
	A Next Node	3 4 5 6 7 8 9 10 11 11 2 13 14 15 15 17 18 19 20 21 22 22 22 24 25 25 25 29 20 30 41 32 33 34 35 36 37 38 39	0018 STAXII JOO19 D 00010	0019 HRUMMI JO020 D 00010	10000 S 12000 00000 = 0200	ODZI HRUMMZ JOSZ D OZZIO	0022 JTAXIZ JO23 D 00010	0023 HREC 01 J0024 D 00010	0024 GAS200 JOO25 D 00010	obas DCRMTA JODAG D 100010	0026 HTPST2 D 00010	0026 CALLS1 JO027 C 00010	27 CALLS/8 JOO27 C	0028 CALLS9 C		\dashv	PREVIOUS EDITIONS OF THIS FORM WILL BE USED UNTIL STOCK IS EXMANSTED.
INPUT No. 2 Extended form 11	A Next Node	4 5 4 7 8 9 10 11 12 13 14 13 14 17 18 19 20 21 22 22 24 25 26 27 28 29 30 31 32 33 34 35 35 37 38 39	0018 STAXII JOO19 D 00010	0019 HRUMMI JO020 D 00010	10000 S 12000 00000 = 0200	ODZI HRUMMZ JOSZ D OZZIO	0022 JTAXIZ JO23 D 00010	0023 HREC 01 J0024 D 00010	0024 GAS200 JOO25 D 00010	obas DCRMTA JODAG D 100010	0026 HTPST2 D 00010	0026 CALLS1 JO027 C 00010	27 CALLS/8 JOO27 C	0028 CALLS9 C			FOUM 1530 PREYOUS EDITIONS OF THIS FOUN WILL BE USED. FEB 89 1530 UNIT, STOCK IS EDIVINITED.
	A Next Node	2 3 4 6 5 6 7 8 9 10 11 12 13 14 13 16 17 18 19 20 21 22 22 22 22 24 25 26 27 28 29 36 31 22 33 34 35 35 35 35	0018 STAXII JOO19 D 00010	0019 HRUMMI JO020 D 00010	10000 S 12000 00000 = 0200	ODZI HRUMMZ JOSZ D OZZIO	0022 JTAXIZ JO23 D 00010	0023 HREC 01 J0024 D 00010	0024 GAS200 JOO25 D 00010	obas DCRMTA JODAG D 100010	50026 HTPSTZ D 00010	0026 CALLS1 JO027 C 00010	27 CALLS/8 JOO27 C	0028 CALLS9 C			PREVIOUS EDITIONS OF THIS FORM WILL BE USED UNTIL STOCK IS EXMANSTED.

Figure 16. Example of mode 3 network coded with preflight and hangar dummies (continued),

•:· :

u A	1100011000	०	_		Γ		γ:			_					_	_	
	10-11-10-03	Ė	-		-	_			-								
	8	늗	-	-		-						_	_	-			
	•	E	-			_											
	Š	1	-		-,												
		12									1.0	·					
	Z	1										:					
		73						<u> </u>			<u> </u>			.,4.		Ш	
		2	L						<u> </u>	ļ				<u> </u>	<u> </u>	- ;	
	¥	Ē	<u></u>					<u> </u>	<u> </u>		-	<u> </u>		<u> </u>		\vdash	
	ঠ	Ě	ļ			<u> </u>			-	 	ļ	 	├		<u> </u>	-	
	8	1	<u> </u>						├—	 		-		-	-	Н	
		-		_	-		-			 	-	 	\vdash	\vdash	 	Н	l
		÷	-	-		_	-	-	H-		_	_	_	 		\vdash	8
		÷	-		-	_	-				-	-			_		AFLC-WPAFB-JAN 74 500
	9	1	-				1		\vdash	_	 	_	_				NAN
	3	3						_		-							ģ
	Š	8														·	Ŋ.
	₹	5															Š
	Z	8								L		L		L		_	
		1	\sqcup				<u> </u>	<u> </u>	 	<u> </u>	<u> </u>	<u> </u>	<u> </u>				ŀ
	#	i.		\vdash				-	<u> </u>	 	 		├	-			l
	8	-		<u> </u>			-	-	 	 	 			_		 	ł
	20	-	\vdash				 	 		 	Ι	\vdash	\vdash	_	 		
	Ž	3	\vdash		Ι	-		 	-	 	\vdash	—					Ì
	N AFSC / AGE N AFSC / AGE N AFSC / AGE	2								Ι	1		\Box				
•		22	\$														I
	Pist Type	3	DUMMY		၁၀												
•		05 60 80	3		0									<u> </u>			
	* \$	60	D										<u> </u>	ļ			ļ
		3								ļ	.			-	-		ļ
	_	29 1	A A		S						<u> </u>	<u> </u>	<u> </u>	<u> </u>		<u> </u>	
	HOURS (Tenths)	3	7		6		<u> </u>	├	-	-		-		├	-	\vdash	
	HOURS (Tenths		1						-	-			_			\vdash	₹
	= 5	97 89 77 67	-					\vdash	-	<u> </u>					_	-	2
•		7	HANGA	_			-			<u> </u>		!					PUNCH CARD TRANSCRIPT
•	Yiinoir¶	39 40 41 42		1	1												=
•	Type Task	8		1	5/												2
	Release	8			1												3
		8	0	0	0				·	<u> </u>				┞—	<u> </u>		₹
	ģ	37	1		1000		ļ		<u> </u>	<u> </u>	Ļ—			 	.	L	₹
	2 4	e S	Š	0	읒		 		 		├	-		├	-	-	-
	NCLOK Clock N	3	000	00	3	 	-	├─	 	 	├─		-	_	-	\vdash	
•		2	H	_	_	_				┢──	_						
•		2				_											
	<u> </u>	5															
	MSBF or Probabili	8									<u> </u>	L	ļ	ļ			
	مُر مِع	8				<u> </u>		L					<u> </u>	<u> </u>		\vdash	
	₹ °	2	_			 	<u> </u>	<u> </u>			-	<u> </u>	├			\vdash	
;	Sel. Mode	-		S	A		-		_	-				 	 		
•	5 - M 1-2	5	Ŧ	7/	-	 	 		 	\vdash	 	 	 				
•		÷	<u> </u>	_				_	1		 						
	ģ	2		O													
	, ž	22		J 09									\sqsubseteq		\perp		
	×	5		0	L	L	<u> </u>				-	ļ	_		 		
	ž	8	_	5	ļ	 	1 -		-	<u> </u>	<u> </u>	-			-	 	l
		흔	ļ		 		├			-	├	-	-	-	 	-	
		Ę		_	 	-	├-	 	-	-	 			 	 		
		-	1	20000E	HANGAR	-	 	 	1	 	 		_		T		158
	Š	-	 	Ö	<u>ক</u>	-	┼	1	_	 	_		_		T-		36
	}	2	1	0	Ž	t	1										£
		2		0	A												₫.
	T2A	Ē		M						<u> </u>	ļ_	└ ─		ļ	 	 	PREVIOUS EDITIONS OF THIS FORM WILL BE USED UNTIL STOCK IS DUMUSTED.
=		Ε	_		Ŀ	_	 	<u> </u>	<u> </u>	_	-		-	-		┝┈┤	23
٤	<u>•</u>	은	!	30900	7		+-	-		-		 -	-	\vdash	 	-	1
œ	9	Ŀ	 	1	\vdash		╁	\vdash	 	 	 	 	 	 	 		20
∩	-	F	1-	7	10	 	t^-	 	 	_	1	1	 	$\overline{}$			ě E
2. 5		1	+-	5	10600	\vdash	1	T^{-}									١,3
No. 2 ED FO		. •						$\overline{}$						1	1	1 7	i
T No. 2 IDED FO					\Box				╄		-	├	 				9
FUT No. 2	A CT Node Clock No.																52
NPUT No. 2 XTENDED FO		•															1530
INPUT No. 2 EXTENDED FORM 11	-	•															F 708 1530
INPUT No. 2 EXTENDED FO																	AF 1024 1530

Figure 16. Example of mode 3 network coded with preflight and hangar dummies (continued),

The networks also contain task times for work on-aircraft and in field shops. They represent the time a technician is tied up on the job and not available for other work. They must consider time to get to a job, time to fault isolate and check out the system, time to clean up, time to get parts, and standby time on multiple crew tasks. They are substantially different from the touch times developed in contractor-prepared maintainability studies. A cockpit mounted radio that can be changed in a few minutes by removing 6 screws might occupy a man for half an hour when total job time is considered.

The maintenance crew size shown for network tasks represents the number of people typically dispatched to the job. Crew size depends on safety factors, maintenance practice in the operating command to account for level of skill and qualification, the need for technical data while working, policy on checking work, accessibility, and on-the-job training. More people will generally be dispatched than are indicated by a strictly touch-time task analysis.

Maintenance frequency, task times, and crew sizes are developed from Air Force experience on similar equipment wherever possible. The Air Force maintenance data collection (MDC) System is the basic information source on what it takes to maintain current equipment. Air Force engineers and experienced maintenance technicians must then evaluate differences and apply judgment factors to the MDC data in order to estimate task requirements for the new design. The development contractor is the primary source of design identification and engineering information.

Procedure

- 2

The first step is to define the proposed design of the new aircraft. Definition must be at least to subsystem level and preferably to line replaceable unit (LRU) level. The contractor's development proposal, submitted at the end of validation phase, will usually encompass this level of design definition. Much useful information can be obtained through visits to the contractor's facility and thorough inspection of any mockups, prototypes, or test aircraft under construction. If there is a flying prototype, experienced Air Force technicians should be assigned to observe and evaluate maintenance procedures and requirements.

Given suitable design definition, the next step is to identify comparable systems and subsystems on existing aircraft. Comparability is assessed in terms of function, design concept, complexity, operating environment, and maintainability features. The Air Force engineers assigned to the program office and their "home office" supporting cadre should conduct this analysis, and it should be coordinated by the program reliability/maintainability officer. It is essential that the analysis and rationale be completely documented and then kept current in each participating program office engineering group.

The comparability analysis should be structured according to contractor's preliminary work unit code manual at subsystem level. special criteria for identifying comparability must be defined for each subsystem at the outset. Experienced maintenance personnel in the program office and/or operating command should be brought in to familiarize each group of engineers with maintenance problems typically associated with their equipment, and jointly establish appropriate criteria. Getting both maintenance and engineering input is critical. In one comparability study, airframe engineers initially based their criteria on the similarity of the heavy load bearing structures to resist stress and fatigue cracking. The maintenance people pointed out that most day-to-day airframe repair work involves fitting skin panels, fitting access doors, and replacing fastners; not fixing broken wing struts. The kind of fastners, curvature, and stress on surfaces, and simple size of the aircraft, may have more bearing than structural design on the comparability of flight line and field shop maintenance. However, vibration absorbing properties of the structure relate to a cause of skin maintenance and cannot be ignored either.

Once the criteria are established, the engineers compare the designs of similar aircraft, drawing on the experience of associates who have worked on various programs, contractor data, and Air Force technical orders, as necessary. The results are then written up by subsystem (3 digit) work unit code, to include: identification of comparable aircraft and subsystem work unit code(s); any additional LRUs in the new subsystem or LRUs by work unit code in the comparable system that are not applicable; any factors that should be applied to the comparable subsystem failure rates or task times in estimating for the new subsystem; and a narrative analysis specifying the criteria used and supporting rationale for choosing the comparable subsystem and factors. Any scheduled maintenance considerations should also be mentioned. In some cases, an item is so new or so changed that there is nothing reasonably comparable. In that case, the best source of data (contractor, etc.) should be identified, and appropriate factors and degree of confidence discussed. Study results should be reviewed in conjunction with experienced maintenance personnel to be sure no maintenance considerations were missed. comparability study requires a considerable effort on the part of program office engineers, but has a payoff in their better understanding and heightened awareness of maintenance considerations when they review contractor proposed designs, and design change proposals.

The next step is to obtain MDC data tapes on aircraft with comparable subsystems, and process the information through a series of specially designed computer programs. These programs and full processing instructions are described in AFHRL-TR-74-97(III). The program outputs are in a convenient format for use in developing a simulation data base. However, some base visits will be essential to verify and correctly interpret certain aspects of MDC coding for the comparable subsystems, and help identify requirements and procedures for using powered age.

The verified MDC data for comparable systems, factored for identified design differences, is used to build an LCOM maintenance data base for the new aircraft. When this data base is completed the networks, times, and particularly the crew sizes and AFSCs, should be reviewed with experienced Air Force maintenance personnel. Operational command technicians on prototype or test aircraft make ideal reviewers. This review is an iterative process.

The basic procedure of design identification, comparability identification, model construction with MDC data, and maintenance review is repeated on design changes to keep the data base current throughout the development and production phases. Test and operational evaluation data is considered as it becomes available. An accurate and fully developed model can be transferred to the operating command for their use when the aircraft becomes operational.


The rest of this section explains how unscheduled maintenance networks are developed from the outputs of the MDC processing programs, and provides examples of networks of varying complexity.

Network Structure

The basic task sequencing for a corrective maintenance network is shown in Figure 17. It must begin with an F task identifying a failure clock and F selection mode. This serves as a gate controlling how often the subsequent network tasks are done. The gate is only opened and tasks processed when the clock on the F task indicates an apparent failure has occurred. The F task is followed by the on-aircraft maintenance tasks needed to describe the corrective work:

- A task to get and set up powered age.
- X task to gain access to the subsystem or LRU, particularly when done by a different AFSC than does the corrective action.
- T task to troubleshoot the subsystem.
- R task to remove and replace an LRU.
- M task for any on-aircraft fix not involving LRU removal.
- V task to perform an inspection or functional check to verify that the subsystem has been fixed.

These tasks are coded with D, E, or A selection mode to describe the appropriate sequence of work at subsystem level. The R task is an average for all LRUs in the subsystem that are done by the same AFSC and crew size. If some items are removed by a different AFSC, these must be grouped into a parallel R task representing the set of LRUs removed by that AFSC and crew size. E selection mode probabilities determine which corrective task is processed.

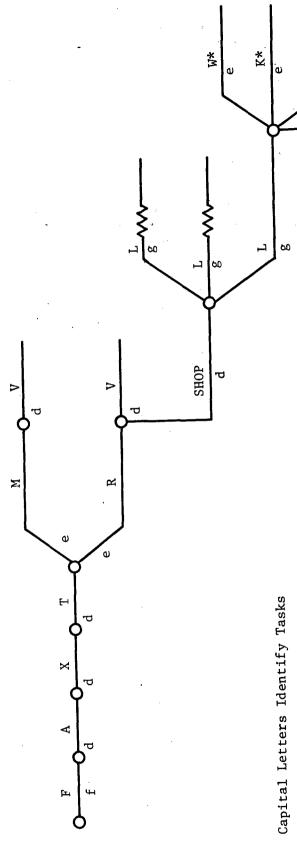

Lower Case Letters Indicate Selection Mode:

×

f = Task is only done when clock indicates failure

e = Mutually exclusive probability, only one path selects

g = Independent probability, one or more paths selected

d = Task is always done

and does not necessarily detain the aircraft * = This and any subsequent work is on the LRU,

Figure 17. Subsystem corrective maintenance network basic logic.

R tasks are normally followed by a shop entry task. This is a dummy because E and G Selection logic cannot be run out of the same network node. It is followed by parallel L tasks representing failed LRUs. Six selection mode probabilities determine which LRU(s) within the subsystem were removed. The following tasks are used to represent the possible shop actions on a removed LRU:

W to bench check and repair the LRU.

K to bench check the LRU and find it serviceable.

N to bench check the LRU, find it NRTS, prepare it for shipment, and order a new one from depot.

An asterisk can be placed in column 39 of the extended Form 11 to indicate that a shop task will not hold up the aircraft if a spare LRU is available. A Q task must be included with selection mode D and no asterisk in order to draw a spare LRU from supply. The asterisked N, W, and K tasks must be coded with selection mode E to assure only one is processed to match each supply demand. The asterisk tells the computer that an LRU is now being processed instead of an aircraft, and should be returned to supply when the task or task sequence is complete. It effectively separates the shop network from the aircraft network unless there was no spare to draw from supply.

Coding Conventions

Activities

Node numbers for on-aircraft maintenance tasks are 5 digits, right justified. The first 3 digits correspond to the first 3 digits of the subsystem work unit code, except that the first digit is entered as the corresponding alphabetic character. The last two digits indicate the task sequencing. For example, for the 14A00 subsystem, node numbers would be A4A00, A4A01, A4A02, etc. For the 42C00 subsystem they would start with D2C00, D2C01, D2C03, etc.

The mode following the shop dummy task and preceding the L task is 6 digits, with an S in the first position, followed by the subsystem work unit code. Subsequent nodes for shop tasks are also six digits, with I in the first position, the first 4 digits of the LRU work unit code, and the last position used for task sequencing as described above. For example, the prior node to the L task in the 14A00 network would be coded SA4A00, and the next node might be IA4AA0. These node numbering conventions may seem a bit confusing at first, but they are quickly mastered, and if followed help prevent serious node duplication errors when networks are modified and updated later. The node starting a task is entered in columns 5 - 10, and the next node in columns 19 - 25, on extended Forms 11.

The appropriate task action code is entered in column 12, followed by the first four digits of the work unit code. Column 17 is reserved

for task identification. It is zero unless there is more than one task with the same action code in the network. For example, if there were two R tasks in the 14A00 network, the first would be coded R14A00 in columns 12 - 17, and the second coded R14A01. Alpha characters can be used in column 17 if needed. Two common tasks are used which do not follow these rules. The shop entry dummy task following an R action is simply coded SHOP in columns 12 - 15. Since it is a dummy with no time or resources the same task name can be used in all networks. On occasion, it may be necessary to specify a task to account for depot turnaround time on a NRTS LRU. If the standard time is applicable, this task may be coded PDEPOT in columns 12 - 16 and no time or resources entered. Use of a standard depot task is discussed further in the examples and in Section VI.

The clock number for the network is entered in columns 34 - 38. This must match the work unit code entered in columns 13 - 17 on the F task. The same clock number is entered on every task in the network that follows the F task. It identifies which failure clock initially triggered the action.

The mean sorties between maintenance actions is entered in columns 27 - 32 on the F task. It is a whole number, right justified, and represents the average number of flights between a corrective maintenance action of any kind on the subsystem. Task type 2 is entered in column 40 for all tasks in the unscheduled maintenance networks. Priority 1 is entered in column 41 for on-aircraft work, and priority 3 for shop work on removed LRUs (task action codes N,W,K, and PDEPOT task). The Q task is coded priority 1. Standard deviation 29 percent of the mean and lognormal distribution are assumed to apply if more precise data are not available. These are entered as 29L in columns 49 - 51.

Each network is preceded by a header card, immediately followed by the F task. The header card has an H in column 25, the clock number in columns 34 - 38, and subsystem nomenclature in columns 42 - 66. Additional header cards can be inserted to change nomenclature where desired. Each L task is preceded by a header card with the LRU work unit code in columns 13 - 17, H in column 25, clock number in columns 34 - 38, and LRU nomenclature in columns 42 - 66. This LRU work unit code must be used in columns 13 - 17 of the Q task to correctly identify the item drawn from supply.

Using the MDC Data Bank

and the

The remaining sections of this section illustrate the use of MDC data runs on comparable subsystems to develop and code unscheduled maintenance networks. The data bank computations and outputs are explained in detail in AFHRL-TR-74-97(III).

The on-aircraft maintenance (no phase) run at 5 digit work unit code level, and field shop maintenance run at 5 digit level contain the applicable data on unscheduled maintenance. These runs include summaries at 3 digit and 4 digit level. The special inspection 04 codes in the work unit code manual and the data run showing the task data for this work need to be reviewed and verified with technicians in the field to identify any unscheduled maintenance that is not coded to subsystem work unit codes. The special inspection run includes a listing of access work and cannot duplicate (CND) troubleshoots. Access is usually peculiar to each design and cannot be extrapolated from data on other aircraft, but such data may give clues on what to look for and can identify where joint removal and checkout is done. The circumstances causing high rates of CND troubleshooting on a comparable subsystem have to be investigated to decide whether they apply to the new aircraft flying the assumed scenario.

The 3 digit summary from an on-aircraft data printout for a VHG-FM radio (62ADD) is illustrated in Figure 18. It shows average reported time for each applicable task action code by AFSC and crew size, and the number of such actions occurring during the period of the data sample. It does not show AGE or access. The mean job time is an overall average time per corrective action for the full sequence of on-aircraft work. A clock value of 39 mean sorties between maintenance actions (MSBMA) is shown on the next line, with quantity per aircraft equal to 1. This means that there is only one such radio on the aircraft. If the QPA were more than one, the MSBMA rate shown could be on a per unit basis. Conversely, if there were two radios on the new aircraft, the unit MSBMA rate taken from the data would have to be adjusted to take this into account. The appropriate computations are discussed in the next section. The matrix printed after the line of stars shows the E probabilities of an R or M corrective action by each AFSC that works on the equipment, and the average times without regard to crew size.

Figures 19 and 20 show how this data is networked and coded on extended Forms 11. The radio set is located in the cockpit of the aircraft. It was determined from discussion with experienced radio maintenance technicians that a ground power unit was required for troubleshoot and check, and that the crew chief (AFSC 431X1) would have to remove panels for access if the radio technician needed to check and repair the wiring. An access task by a 431X1 is generally required wherever panels with high torsion fasteners have to be removed.

The network shows an F task with a clock of 39 MSBMA. This is followed by an A task, covering delivery of AGE by a 421X3 and hookup by the 431X1 crew chief. The corrective action is either a remove and replace (.73 E probability) by 328X0, or access by the crew chief (.27 E probability) and repair by 328X0. The typical crew dispatched is 2 328X0 technicians. Troubleshoot and check were reported separately less than 15% of the time, so they are included in with the R and M tasks, using the mean job time. Note, however, that 36 troubleshoots were reported under a 2 digit 62000 work unit code. Including these troubleshoots increases the mean job times by .1 hour:

			,													:				1						-,]
T ACTIONS	ACTIONS	ACTIONS	ACTIONS	ACTIONS	ACTIONS	ACTIONS	ACTIONS	ACTIONS	ACTIONS	ACTIONS	ACTIONS	ACTIONS	1.5			MPROB	.27		SUCTION	ACTIONS	ACTIONS	ACTIONS		-		MPROB
1 1	X	£ 63	Σ.	Z .	24 R	244 R	2	7	31 V	2 T	21 T	2	TIME=			Z	101		\ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \	4	28.	1 1		٠.		HAA
4.0 HR	1.5 HR	1.2 HR	1.7 HR	1.2 HR	1.4 HR	1.4 HR		2.1 HR	8 H	.9 HR	1.0 HR	1.0 HR	MEAN R JOB			M FLAP	1.27		7 10		1 0 T					H ELAP
CREW= 4	CREW= 1	CREW= 2	CREM= 3	CREW= 4	CREW= 1	CREM= 2	CREM= 3	CREW= 1	CREW= 2	CREM= 1	CREW= 2	CREW= 3	TIME= 1.49	· 		RPROB	.73		6 -nage	1	CREW 2	CREM= 3	+		,	RPROB 0
												;·	. 80€ H	QPA=		RMA	270						OPA=			RHA
AFSC GROUP													328X0, MEAN	- 39.		R FLAP	ł				:		= 4795.			R ELAP 0.08
NOM=TEAM HORK AFSC GROUP	AV RADIO	A V	AV RADIO	A	AV RADIO	٨	AV RADIO	AV RADIO	>	AV RADIO	AV RADIO	AV RADIO	, AFSC	UNIT MSBMA=		AFSC	328X0		0 1	?	\ \ \	AV	UNII MSBMA			AFSC 328X0
NOM	NOM=	NON	NCM=	NOM	NOM	NOM	-WOW	NON	NOW	HON	NOM	NOM	C 62A			24			1 20	- NON	NO N	-WON	00			200
8X 0E	328X0	328X0	328X0	328X0	328XD	328X0	328X0	328 X0	328X0	328X0	328X0	328X0	FOR MU	MUC=62		MUC= 6	-		2000	22 8 4 1	328X0	328X0	MUC=62			MUC= 6
AFSC=328X0E	AFSC=	AFSC=	AFSC=	AFSC=	AFSC=	AFSC=	AFSC=	AFSC=	AFSC=	AFSC=	AFSC=	AFSC=			****				10014	AEC 0-	AFSCH	AFSC=		1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	****	
WUC=62A	MUC=62A	WUC=62A	MUC=62A	WUC=62A	WUC=62A	WUC=62A	WUC=62A	WUC=62A	HUC=62A	MUC=62A	_ MUC=62A _	WUC=62A							0000-01151	100 - 100 M	MUC-6200	WUC=6200	***************************************	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	****	
l				1				{		}		ł			*		 58	l	1	1		ł	l		-	ł

. % 1

Figure 18. Data bank printout for VHF radio on-aircraft work.

SCHOOLS

Figure 19. Schematic of VHF radio network.

		noitevaitm	2	임		1	1			1	Т			1		\top	-	7
			7	Ř T	1-	1	1	T	I	I	1	1	1-	1	+	+	+	٦
1		-	A A C C C C C C C C C C C C C C C C C C	R	I	T	I	工	I	\perp	$oldsymbol{\perp}$	I	$oldsymbol{\square}$	I			上	J
			3	1		4_	┵	┵		_	1_			\Box	-]
1			Š	-	+-	4-		┿~	╃—	+	4-	+	╀-		+-	4_	-	4
ı			ž	-	+	┿	+	┿-	┿	┿	┽	+	+-	┿		+		┥┈
ŀ					†	+-	十	+-	+	au	+	+-	+-	+	+-	+	+	4
ĺ					T	1					\top	1	†	1	+	1	+-	1 `
			2															I
				1	╄	10		┯	↓_	↓_	1	1	1_]
			1	<u>.</u>	┼	74	<u> </u>	┿	4	╀	╄	1_	<u> </u>	-	-	4-	╄~	4
			N ALS / AGE	-	+-	+=	! 	┼	┿	╫	┿	+	+-	+	┿		┿~	4
			1	1	+-	+-	╁┈	+-	+	╫	╁	+	┿	╁	+-	4-	+-	┨. 8
			. 1	1	1_	-	-	+	+	\vdash	1	 	+-	1	+-	+	+-	AFLC-WPAFB-JAN 74 500
		\$	3		I_{-}	×							I		I			. ₹
		į	3	<u> </u>	 	-	ع إ	<u> </u>	0	1] {
			毕		┼—	43	94	<u> </u>	9 A	' 	1—	┦	╄	 	4	—	┦—	-1 ₹
			1	-	┼	+=	}=	}	+=	:	+	╂	╁	+-	+-	╫	+-	-1 ₹
			39 60 61 62 63 64 66		1	╁╌	+	+	+	+-	十	+-	+	┪┈╴	+-	+	+	1
		-	J			M	× × ×	5 _=	0		1	<u> </u>	C					1
			6		<u> </u>	×	: ×	×	×				×		×		oxdot	1
		ì	1	 	<u> </u>	1	· 00	4=	78	-	ļ	├	o			2	<u> </u>	1
		7	۳	+-	+-	12	12	43	12	-	-	+-	32	77	2	-	+-	4
			52 53 54 55 56 57 54	1	+-	4	23	#=	23	-	1	+-	23	23	22	1-	+-	1
			2	1	 	†	1.,	\	1,,	 -	I	1-	1,,	1	+	├	17	r l
		eqvī . faic	1 5			1	1		7		3		4				8	1
		_	48 49 50	8	<u> </u>	0	6	5	6	匚	3		0	0	10	\sqsubseteq	CONTROL	[]
		* ₹	-	HA	 	7	7	ñ	R	├	-	├	N	7	13	4	15	:
			6	7	├	~	3	100	5		-		╌	फ	+~	+	1	1
		w 2		2	_	20	=	S	=	 	2	-	4	=	38	 	15	3
		HOURS	48 44 45 46						 .	_			-		1	1	1	7.
		2 -	3	F							L						T.	[2
				VHF		! —		 			H		<u> </u>		L_		NAFF]ጅ
			41 43		_	=	=	-		_	>	~	~	~	1~	-	>	I≨
		Type Task	9		त	त	R	R	त	7	_	33	23	23	ति	R	1-	
		Release	1												1		-	
			8				<u> </u>						*	**	**	ł	1	13
			8	O	0	0	0	0	0	0	0	0	*	*	*	0	0]3 =
			8	pp	0	0	0	0			۵	۵	* 00	*00	00#23	0	0	UNCH CA
			8	A	A	AO	AO	AO		A	AO	A	Alo	AD	*00 PZ	A	00 47	PUNCH CARD TRANSCRIPT
			34 35 36 37 38		0	0	0	2A0			2A0	۵	62A00*	AD	77	A	62400	PUNCH CA
		NCLOK Clock No.	33 34 35 36 37 38	A	6240	2A0	240	6240		240	AO	6240	62A0	62 40 0*	624	62A00	62400	PUNCH CA
		NCLOK Clock No.	33 34 35 36 37 38	A	9 6240	2A0	3 6240	7 6240		240	2A0	6240	62A0	AD	624	A	62400	PUNCH CA
		NCLOK Clock No.	33 34 35 36 37 38	A	6240	2A0	6240	6240		240	2A0	6240	2A0	62/40	77	A	62400	PUNCH CA
•		or NCLOK	33 34 35 36 37 38	A	9 6240	2A0	3 6240	7 6240		240	2A0	696 62A0	62A0	62/40	624	A	62400	PUNCH CA
•		ASBF or NCLOK	28 79 30 31 32 33 34 35 36 37 38	A	9 6240	2A0	3 6240	7 6240		240	2A0	6240	62A0	62/40	624	A	62400	PUNCH CA
		ASBF or NCLOK	28 79 30 31 32 33 34 35 36 37 38	A	39 6240	6240	73 62AD	27 62AO		240	2A0	01696 6240	85 6240	12 6240	429 ED	W79	62400	PUNCH CA
		MSBF or NCLOK	26 27 28 29 30 31 32 33 34 35 36 37 38	624	9 6240	2A0	3 6240	7 6240		240	6240	696 62A0	62A0	62/40	624	A	79	PUNCH CA
		MSBF or NCLOK	26 27 28 29 30 31 32 33 34 35 36 37 38	A	39 6240	D 62A0	E 73 62A0	E 27 62A0		6240	2A0	G 01696 62A0	85 6240	12 6240	429 ED	W79	62400	PUNCH CA
		MSBF or NCLOK	26 27 28 29 30 31 32 33 34 35 36 37 38	624	01 F 39 62A0	2 D 62A0	E 73 62A0	E 27 62A0		6240	6240	G 01696 62A0	85 6240	12 6240	429 ED	W79	79	PUNCH CA
		MSBF or NCLOK	26 27 28 29 30 31 32 33 34 35 36 37 38	624	A01 F 39 62A0	2 D 62A0	E 73 62A0	A04 E 27 62A0		400	6240	G 01696 62A0	85 6240	12 6240	429 ED	W79	79	PUNCH CA
		MSBF or NCLOK	26 27 28 29 30 31 32 33 34 35 36 37 38	624	2A01 F 39 62A0	2A02 D 62A0	2A03 E 73 62A0	2A04 E 27 62A0		400	6240	2AAO G 01696 62AO	85 6240	12 6240	429 ED	W79	79	PUNCH CA
		MSBF or NCLOK	26 27 28 29 30 31 32 33 34 35 36 37 38	624	A01 F 39 62A0	D 62A0	E 73 62A0	A04 E 27 62A0		400	6240	2AAO G 01696 62AO	85 6240	12 6240	429 ED	W79	79	PUNCH CA
		MSBF or NCLOK	26 27 28 29 30 31 32 33 34 35 36 37 38	624	2A01 F 39 62A0	2A02 D 62A0	2A03 E 73 62A0	2A04 E 27 62A0		00	6240	G 01696 62A0	85 6240	12 6240	429 ED	W79	79	PUNCH CA
		MSBF or NCLOK	26 27 28 29 30 31 32 33 34 35 36 37 38	624	FZA01 F 39 62A0	F2A02 D 62A0	F2A03 E 73 62A0	F2A04 E 27 62A0	62A0	400	H 62A0	IFZAAO G 01696 62AO	E 85 62A0	E 12 62 A0	6 03 624	D 02A	2	
	•	MSBF or NCLOK	26 27 28 29 30 31 32 33 34 35 36 37 38	624	FZA01 F 39 62A0	0 F2A02 D 62A0	00 F2A03 E 73 62A0	00 F2A04 E 27 62A0	62A0	SF2A00 62A0	0	IFZAAO G 01696 62AO	0	E 12 62 A0	0	00 D 0	2	
		MSBF or NCLOK	26 27 28 29 30 31 32 33 34 35 36 37 38	624	FZA01 F 39 62A0	0 F2A02 D 62A0	A 00 F2A03 E 73 62A0	400 F2A04 E 27 62A0	A 0 0	SF2A00 62A0	AAO H 62AO	IFZAAO G 01696 62AO	AAO E 85 62AO	AAO E 12 62AO	AAO 03 62A	00 D 0	2	
		MSBF or NCLOK	26 27 28 29 30 31 32 33 34 35 36 37 38	624	FZA01 F 39 62A0	0 F2A02 D 62A0	2A00 F2A03 E 73 62A0	400 F2A04 E 27 62A0	A 0 0	SF2A00 62A0	AAO H 62AO	IFZAAO G 01696 62AO	AAO E 85 62AO	AAO E 12 62AO	AAO 03 62A	00 D 0	2	
		MSBF or NCLOK	26 27 28 29 30 31 32 33 34 35 36 37 38	624	FZA01 F 39 62A0	62400 F2A02 D 62A0	62A00 F2A03 E 73 62A0	62A00 F2A04 E 27 62A0	62 400	SF2A00 62A0	0	62AAO IFZAAO G 01696 62AO	AAO E 85 62AO	62AAO E 12 62AO	62AAO E 03 62A	00 D 0	2	
		MSBF or NCLOK	26 27 28 29 30 31 32 33 34 35 36 37 38	624	2A01 F 39 62A0	0 F2A02 D 62A0	2A00 F2A03 E 73 62A0	400 F2A04 E 27 62A0	A 0 0	400	AAO H 62AO	IFZAAO G 01696 62AO	0	AAO E 12 62AO	AAO 03 62A	0 D 0	2	
		MSBF or NCLOK	26 27 28 29 30 31 32 33 34 35 36 37 38	624	F62A00 F2A01 F 39 62A0	1 A62400 F2402 D 6240	R62AOO F2AO3 E 73 62AO	X62A00 F2A04 E 27 62A0	M62 A 0 0 62 A 0	SHOP SFZAOO 62AO	AAO H 62AO	LEZARO IFZARO G 01696 62A0	O WGZAAO E 85 62AO	62AAO E 12 62AO	O NEZAAO	0 Q62A00 D 62A	2	
		MSBF or NCLOK	26 27 28 29 30 31 32 33 34 35 36 37 38	624	F62A00 F2A01 F 39 62A0	01 A62400 F2A02 D 62A0	02 R62A00 F2A03 E 73 62A0	DY X62ADO F2ACA E 27 62AO	M62 A 0 0 62 A 0	SHOP SFZAOO 62AO	AAO H 62AO	LEZARO IFZARO G 01696 62A0	O WGZAAO E 85 62AO	A O K62AAO E 1/2 62AO	O NEZAAO	0 Q62A00 D 62A	2	
		MSBF or NCLOK	26 27 28 29 30 31 32 33 34 35 36 37 38	624	F62A00 F2A01 F 39 62A0	401 A62400 F2402 D 6240	ADZ R62AOO F2AO3 E 73 62AO	ADL X62ADO F2ACA E 27 62AO	M62 A 0 0 62 A 0	SHOP SFZAOO 62AO	AAO H 62AO	LEZARO IFZARO G 01696 62A0	O WGZAAO E 85 62AO	AAO K62AAO E 12 62AO	AAO N62AAO	0 Q62A00 D 62A	2	
lo, 2		MSBF or NCLOK	26 27 28 29 30 31 32 33 34 35 36 37 38	624	F62A00 F2A01 F 39 62A0	2401 A62400 FZA02 D 62A0	2 A 0 2 R 6 2 A 0 0 F 2 A 0 3 E 73 6 2 A 0	2 AO2 X62 AOO F2 AO4 E 27 62 AO	2A04 M62A00	2403 SHOP SFZAOO 62AO	AAO H 62AO	LEZARO IFZARO G 01696 62A0	ZAAO W6ZAAO	ZAAO KGZAAO	2 AAO N62AAO	2AAO Q62AOO D D 62A	2	PRIVOUS IS DANISTED. PUNCH CASE PUNCH CA
. No. 2		MSBF or NCLOK	26 27 28 29 30 31 32 33 34 35 36 37 38	624	FZA01 F 39 62A0	401 A62400 F2402 D 6240	ADZ R62AOO F2AO3 E 73 62AO	ADL X62ADO F2ACA E 27 62AO	M62 A 0 0 62 A 0	SHOP SFZAOO 62AO	AAO H 62AO	FZAOO LEZAAO IFZAAO G 01696 62AO	FZAAO WGZAAO	AAO K62AAO E 12 62AO	FZAAO N62AAO	FZAAO G6ZAOO D D 6ZA	2	
UT No. 2		Prior Node ACT WUC Next Node 5 Probability Clock No.	28 79 30 31 32 33 34 35 36 37 38	624	F62A00 F2A01 F 39 62A0	2401 A62400 FZA02 D 62A0	2 A 0 2 R 6 2 A 0 0 F 2 A 0 3 E 73 6 2 A 0	2 AO2 X62 AOO F2 AO4 E 27 62 AO	2A04 M62A00	2403 SHOP SFZAOO 62AO	AAO H 62AO	LEZARO IFZARO G 01696 62A0	ZAAO W6ZAAO	ZAAO KGZAAO	2 AAO N62AAO	2AAO Q62AOO D D 62A		PENOUS ENTINES OF HIS FORM WILL RE USES UNTLESTOCK IS EDMAISTED.
NPUT No. 2		Prior Node Next Node S Probability Clock No.	3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 24 23 36 27 28 29 30 31 32 33 34 35 36 37 38	624	F62A00 F2A01 F 39 62A0	2401 A62400 F2402 D 6240	2 A 0 2 R 6 2 A 0 0 F 2 A 0 3 E 73 6 2 A 0	2 AO2 X62 AOO F2 AO4 E 27 62 AO	2A04 M62A00	2403 SHOP SFZAOO 62AO	AAO H 62AO	FZAOO LEZAAO IFZAAO G 01696 62AO	FZAAO WGZAAO	ZAAO KGZAAO	FZAAO N62AAO	FZAAO G6ZAOO D D 6ZA		PENOUS ENTINES OF HIS FORM WILL RE USES UNTLESTOCK IS EDMAISTED.
INPUT No. 2	EXTENDED FORM 11	Prior Node Next Node S Probability Clock No.	4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 22 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38	624	F62A00 F2A01 F 39 62A0	2401 A62400 F2402 D 6240	2 A 0 2 R 6 2 A 0 0 F 2 A 0 3 E 73 6 2 A 0	2 AO2 X62 AOO F2 AO4 E 27 62 AO	2A04 M62A00	2403 SHOP SFZAOO 62AO	AAO H 62AO	FZAOO LEZAAO IFZAAO G 01696 62AO	FZAAO WGZAAO	ZAAO KGZAAO	FZAAO N62AAO	FZAAO G6ZAOO D D 6ZA		PENOUS ENTINES OF HIS FORM WILL RE USES UNTLESTOCK IS EDMAISTED.
INPUT No. 2		Prior Node Next Node S Probability Clock No.	3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 24 23 36 27 28 29 30 31 32 33 34 35 36 37 38	624	F62A00 F2A01 F 39 62A0	2401 A62400 F2402 D 6240	2 A 0 2 R 6 2 A 0 0 F 2 A 0 3 E 73 6 2 A 0	2 AO2 X62 AOO F2 AO4 E 27 62 AO	2A04 M62A00	2403 SHOP SFZAOO 62AO	AAO H 62AO	SFZAGO LEZAAO IFZAAO G 01696 62AO	FZAAO WGZAAO	ZAAO KGZAAO	FZAAO N62AAO	FZAAO G6ZAOO D D 6ZA		

Figure 20. VHF radio network coding.

•	o,	Continuet	8	二	\Box	7	\neg	\exists	7	1	1	7	-	4			\Box	
٠.		Z ASS. ASS. ASS. ASS. ASS. ASS. ASS. ASS	<u>}</u>	-+	+	-+		-+	-		士							
		3		\Box	\exists	\Box	\Box	7	\Box	-	\dashv	\Box	-	\neg			\dashv	
		AFS				\exists			士		二	コ		二				
	_	Z	Ž.			\dashv	-	_	-	+		-	-+				-	
	-		2	-+	-	一			士	士		コ	丁	\Box				
		N AFSC / AGE		\Box	\dashv	\dashv	\dashv		\dashv		_	-		-		 		
		ડ્રે	\$	\dashv	~							コ	\rightrightarrows	\exists				}
	_	<u> </u>	3		\dashv	\dashv				-+	-+			-		├─	_	
	-		#	_					二		二	\sqsupset	\rightrightarrows					AFLC-WPAFB-JAN 74 500
	-	8	3		_			-+		-+						}		NAL.
			3		士	\exists				\dashv	耳	_		\Box				9.444
		N AFSC / AGE	2			}				╌┼	-+	\dashv	}	\dashv		-	-	, .
	-	Z	3						\rightrightarrows	\rightrightarrows		\Box	\Box				ļ.,	`
	_		3	┷┼	0		\dashv		\dashv	ত	-+	0	0					1
		AGE	5	\exists	×	=			\Box	X		쏬	X		_		-	ł
		3	8		8					2	\dashv	2	ल					ĺ
		AFSC /AGE	3		2328X	二				23.28X		2328X	2328X	_	_	-	-	
	-		52 53		-			$\neg \downarrow$		<u>``</u>							匚	1
		egyl . Isiq	5		크					7		767	762	_	_	├	├	ł
		× × × ×	15 05 44 97	\dashv	39					8		ñ	N			二	二	1
			3	\Box							-+	7	700		-	┼─	├-	ł
		<u>ء</u> د	43 44 45 46 67	_	25					20	\exists	Ē	38	_				1
		HOURS (Tenths)	4 45	\neg						{					-	-	├-	量
		≖ 5	3								\Box						二	ĬŘ
		Yijoira	2	m	m	_			-	-	3	3	M	_				≅
	3	Aspl eqyi	8	N	N	N			R	न	त्र	00米23	0#23	3		-	<u> </u>	18
		Release	8		*				i		~	좃	8	$\overline{}$	├─	╫	+	Į U
				ठ	0	0		1	0	9				<u>~</u>	<u> </u>		┺	12
	•	ż	6 37 38	0	00	00	_	-:	00	9	000		A O	₹ ₩			1	PUNCH CARD TRANSCRIPT
	•	SLOK ock No.	35 36 37 38	POP	2A00*	2A00		Alo	2A00	2A00	A	V	2A0	2A00				PUNCH
	•	NCLOK Clock No.	34 35 36 37	0	62A00	62A00		AAO	62A00	62A00	6240		62A0	62A0				PUNCH
	•		32 33 34 35 36 37	6 62AO	162A00	62A00		Alo		6 62	62 A	1 624	62A0	4				PUNCH
	•		32 33 34 35 36 37	6 62AO	1 62A00	62400		62AA0	696	62	A	V	09 62AO	4				PUNCH
	•	o billity.	29 30 31 32 33 34 35 36 37	0056 62A0	162A00	162A00		AAO	01696 62A00	6 62	62 A	1 624	62A0	4				PUNCH
	•	o billity.	29 30 31 32 33 34 35 36 37	0056 62A0	79			ING 62AAO	9 69 10	66 62	34 624	91624	09 62AO	79				PUNCH
	•	o billity.	29 30 31 32 33 34 35 36 37	0056 62A0	D 62A00	D 62A00		ING 62AAO	9 69 10 9	E 66 62	62 A	1 624	62A0	4				PUNCH
	•	o billity.	29 30 31 32 33 34 35 36 37	0056 62A0	D			WORKING 62AAO	9 69 10 9	E 66 62	1 E 34 62A	91624	09 62AO	79				PUNCH
	•	o billity.	29 30 31 32 33 34 35 36 37	0056 62A0	D			WORKING 62AAO	9 69 10 9	E 66 62	1 E 34 62A	91624	09 62AO	79				PUNCH
	•	o billity.	29 30 31 32 33 34 35 36 37	0056 62A0	D			ING 62AAO	9 69 10 9	E 66 62	1 E 34 62A	91624	09 62AO	79				PUNCH
	•	o billity.	29 30 31 32 33 34 35 36 37	0056 62A0	D			METWORKING 62AAO	9 69 10	E 66 62	34 624	91624	09 62AO	79				PUNCH
	•	o billity.	29 30 31 32 33 34 35 36 37	0056 62A0	D 62	A		WORKING 62AAO	IFZAAO 6 01696	E 66 62	IF2AA1 E 34 62A		E 09 62A0	79				
	•	o billity.	29 30 31 32 33 34 35 36 37	0056 62A0	0	A		BF NETWORKING 62AAO	O IFZAAO G 01696	E 66 62	OO IFZAAI E 34 62A		E 09 62A0	79				
	•	o billity.	29 30 31 32 33 34 35 36 37	0056 62A0	0	A		BF NETWORKING 62AAO	O IFZAAO G 01696	E 66 62	OO IFZAAI E 34 62A		E 09 62A0	79				
	•	o billity.	29 30 31 32 33 34 35 36 37	0056 62A0	0	A		THOD OF NETWORKING 62AAO	0 IFZAAO 6 01696	E 66 62	OO IFZAAI E 34 62A		E 09 62A0	79				
		Node of the control o	29 30 31 32 33 34 35 36 37	0056 62A0	WEZADO DO DO DO DO DO DO DO DO DO DO DO DO D	Q62ADG		HOD OF METWORKING 62AAO	LEZANO IFZANO G 01696	REZDADO E 66 62	JOGOO IFZAA! E 34 62A	W62AAO	M62/A A O 6 62A O	79				
		Node of the control o	29 30 31 32 33 34 35 36 37	0056 62A0	D WEZADO DO DO DO DO DO DO DO DO DO DO DO DO D	Q62ADG		METHISD OF METWORKING 62AAO	LEZANO IFZANO G 01696	REZDADO E 66 62	JOGOO IFZAA! E 34 62A	W62AAO	M62AAO E 09 62AO	1 OLZANO D	-			
~		Node of the control o	29 30 31 32 33 34 35 36 37	0056 62A0	D WEZADO DO DO DO DO DO DO DO DO DO DO DO DO D	Q62ADG		TE METHOD OF NETWORKING 62AAO	LEZANO IFZANO G 01696	REZDADO E 66 62	JOGOO IFZAA! E 34 62A	W62AAO	M62AAO E 09 62AO	1 OLZANO D				
10.2		Node of the control o	29 30 31 32 33 34 35 36 37	0056 62A0	2ADD WEZADO 162	Q62ADG		NATE METHOD OF NETWORKING 62AAO	FZAOO LEZANO IFZANO GIOI 696	REZDADO E 66 62	JOGOO IFZAA! E 34 62A	W62AAO	FZAAII MEZAAO	FZAAII OLZZAAO D				PUNCH TREVOLS EMPIOR OF THIS FORWART IN USED UNITS STOCKED TO THE
T No. 2		Node of the control o	29 30 31 32 33 34 35 36 37	0056 62A0	FZADO WEZADO	F2ADO G62ADO		NATE METHOD OF NETWORKING 62AAO	FZAOO LEZANO IFZANO GIOI 696	FZAOO REZAAO	JOGOO IFZAA! E 34 62A	W62AAO	M62AAO E 09 62AO	FZAAII OLZZAAO D				PREVIOUS EDITIONS OF THIS FORM WALL BY USED UPIN STOCK & DEPAYABLED.
IPUT No. 2		Node of the control o	4 6 6 7 8 8 9 10 11 12 13 14 13 16 17 18 19 20 21 22 22 24 25 26 27 28 20 31 32 33 34 38 36 37	SFZIADO L'EZADO IFZADO G 00056 62A0	FZADO WEZADO	F2ADO G62ADO		TERNATE METHED OF NETWORKING 62AAO	SFZAOO LEZAAG IFZAAO 6 01696	FZAOO REZAAO	JOGOO IFZAA! E 34 62A	W62AAO	FZAAII MEZAAO	FZAAII OLZZAAO D				PREVIOUS EDITIONS OF THIS FORM WALL BY USED UPIN STOCK & DEPAYABLED.
INPUT No. 2	EXTENDED FORM 11	Node of the control o	29 30 31 32 33 34 35 36 37	SFZIADO L'EZADO IFZADO G 00056 62A0	FZADO WEZADO	F2ADO G62ADO		NATE METHOD OF NETWORKING 62AAO	SFZAOO LEZAA TEZAAO G 01696	FZAOO REZAAO	JOGOO IFZAA! E 34 62A	W62AAO	FZAAII MEZAAO	FZAAII OLZZAAO D				

ાં

Figure 20. VHF radio network coding (continual).

$\frac{36 \text{ more T actions x 1.1 Avg. T Hours}}{373 \text{ Total R + M Actions}} = .1 \text{ Hours}$

There are two LRUs that show any significant frequency of removal on the shop printout (Figure 21). Both are repaired in the radio shop. The receiver transmitter has a G probability of .01696 and the control has a G probability of .00056. The G probability is the per sortice probability that the LRU will be removed. It is used to assess the relative proportion or removals among the LRUs in the subsystem network. It is entered in columns 28 - 32 on the extended Form 11 right justified without a decimal. When a G probability is indicated, at least one of the alternate L tasks must be chosen by the program.

Shop data print-outs show two types of W tasks. A WA is a bench check and repair, but a WF is a repair following a separately reported bench check (code C). Two kinds of summary matrices are provided to assist in networking.

Data in the first matrix applies when the removed unit is always replaced from supply stock if available. This matrix shows the E probability and elapsed times for W, N, or K actions in shop. The NRTS is broken out to 4 digit and 5 digit level LRUs. Figure 20 shows how this situation is coded. A D selection mode is used on the W task for the control unit because W is the only possibility. No N or K tasks were indicated in the data.

Figure 20 also shows 62AAO networked by the alternate method to illustrate the difference. This applies to situations where the unit is bench checked when removed. If it checks OK or is fixed in a short time, it is put back on the airplane. A spare is only drawn from supply if a long repair is required. The repair work is then deferred to a later time. In this case, the K task code represents a combined bench check OK and WA bench check. It is priority 1 and is not asterisked since the aircraft is tied up awaiting the bench check, and no units are withdrawn from or returned to supply. The W task represents bench check and deferred repair only. The W and N tasks are asterisked and priority 3 because the aircraft is fixed with a unit drawn from supply.

Computations with MSBMA

那時代

The MSBMA clock value may have to be recomputed or adjusted in the course of coding a network. Since it is an inverse number, the correct computations are not always intuitively obvious. The relationship of MSBMA to the probability of a maintenance action on the subsystem is:

$$P_{M} = \frac{1}{MSBMA}$$

To combine two MSBMA values, interactions can usually be ignored and their probabilities added:

!			85.0		438.2 i	-	542.6 1			35.4 1	!	14.4	244. (
66 WF ACTIONS	4 WF ACTIONS	1 WF ACTIONS	2 K ACTIONS	28 K ACTIONS	2 C ACTIONS	72 C ACTIONS	5 WA ACTIONS	26 WA ACTIONS	1 WA ACTIONS	1 N4 ACTIONS	3 N4 ACTIONS	3 N5 ACTIONS	TOTAL IN SHOP=		
2 4.8	3 6.1 HR	. 4 1.9 HR	: 1 • 9 HR	: 2 1.5 HR	1 3.0	2 3.0 HR	1 1.6	2 2.1 HR 1	3 4.0 HR	1 1.0 HR	2 5.7 HR	. 2 2.4 HR	FACTOR=1.012	. 1	
CREM	CREW	CREM	CREW=	CREW	CREW	CREX	CREW	CREW	CREW	CREM	CREW	CREW=	ADJUSTED COUNT=252 Q	G PROB= .01696 QPA=	
	NCM= AV RADIO	NOM= AV RADIO		NOM= AV RADIO		NOM= AV RADIO		NCM= AV RADIO	NOM= AV RADIO	NOM= AV RADIO		NOM= AV RADIO	REMOVALS=255	UNIT MSBF = 67.	
C= 328X0	C= 328×0	C= 328X0				,		į		SC= 328X0	SC= 328X0	-SC= 328X0	FOR WUC=62AA	MUC=62AA UI	
HUC=62AA AFSC=	MUC=62AA AFSC=	WUC=62AA AFSC=	HUC=62AA AFS	WUC=62AA AFSC=	WUC=62AA AFS	WUC=62AA AFS	WUC=62AA AFSC=	WUC=62AA AFS	_	HUC=62AA AES	MUC=62AA AFS	Ā	L	3	

0014	:	- 11			i					A110 B 6.	2000	
328X0	328X0 4.11 207	207	. 85		1.45 30	30	.12	4.55		T T	• 02 2.4(N ELA
*****IF REMOVED ITEM ALWAYS BENCH CHECKED BEFORE REPLACEMENTS WUC=62AA	EPOVED ITEM AL	ALWAYS	BENCH CH	ECKED B	EFORE R	EPL ACEMEN	2 L				i	
AFSC	PROB KHA KHA ELAP	A KHA		PROB NOT KHA	KHA	COND PROB WF	B WF	딥	COND	FROB NA	П	CO
328X0	99•		1.96		.34		•91	7.71		•05	4 .55	•

11.6 1	23.0 1	9
2 WF ACTIONS	1 WA ACTIONS 5 WA ACTIONS	TOTAL IN SHOP=
2 XF	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	TOTAL
2.9 HR 1.1 HR	.8 HR 2.2 HR	TOR=1.000
CREW= 2 2.9 HR CREW= 2 1.1 HR	CREW= 1 .8 HR CREW= 2 2.2 HR	+RPR TIME= 2.5 LS= 12 ADJUSTED COUNT= 12 Q FACTOR=1.000 1798. G PROB= .00056 QPA= 1
		ED COUNT= 8= .00056
		HE= 2.5 ADJUST G PRO
AV RADIO AV RADIO	NOM= AV RADIO NOM= AV RADIO	X < II
HWON HWON	NOW NOW	MEAN G REMOV
328X0 328X0	328X0 1	328X0 UC=62AD0 2AD0 U
AFSC= AFSC=	AFSC= 328X0 AFSC= 328X0	=62ADD AFSC= 328X0 FOR WUC=62ADD WUC=62ADD UN
MUC=62AD0 AFSC= 328X0 NOM= WUC=62AD0 AFSC= 328X0 NOM=	WUC=62AD0 AFSC= 3 WUC=62AD0 AFSC= 3	FOR WUC=62ADD AFSC= FOR W

Figure 21. Data bank printout for VHF radio shop work.

$$\frac{1}{\text{MSBMA}_{Total}} = \frac{1}{\text{MSBMA}_{1}} + \frac{1}{\text{MSBMA}_{2}}$$
or:
$$\frac{1}{\text{MSBMA}_{Total}} = \frac{1}{\left(\frac{1}{\text{MSBMA}_{1}} + \frac{1}{\text{MSBMA}_{2}}\right)}$$

If an LRU with an MSBMA of every 50 sorties is included in a subsystem with a clock of 100, the new clock value is:

MSBMA =
$$\left(\frac{\frac{1}{1} + \frac{1}{100}}{50 + \frac{1}{100}}\right) = \frac{100}{3} = 33$$

The new clock value is not the average of the two MSBMA values, but is a number lower than either of them. This makes sense when one realizes that if another source of failure is added to a subsystem that is already failing every 50 sorties, it is going to fail more often. More frequent failures mean a lower value of MSBMA.

The relative significance of MSBMA values is also deceiving. Large differences in large MSBMA numbers are often insignificant while even relatively small differences in small MSBMA values represent important differences. Consider MSBMA values of 2000 and 1000. The difference in terms of probability of a maintenance action is:

P Diff. =
$$\frac{1}{1000}$$
 - $\frac{1}{2000}$ = $\frac{1}{2000}$ = .0005.

On the other hand, the difference between MSBMA values of 10 and 5 is:

P Diff. =
$$\frac{1}{5}$$
 - $\frac{1}{10}$ = $\frac{1}{10}$ = .1000

The latter difference is 200 times greater in terms of frequency of failure. For this reason, subsystems which fail less than once in 2000 sorties can often be ignored in building networks, but changes and modifications which affect low MSBMA numbers may have considerable impact on the simulation results.

When the aircraft being modeled has more than one of a given subsystem installed, the unit MSBMA taken from the data bank must be divided by the number installed to get the correct total maintenance rate. For example, if an aircraft has 2 identical hydraulic pumps with the same work unit code identification, and the data bank shows that a single pump requires maintenance every 50 sorties, then the average MSBMA rate for the 2 pumps will be once every 25 sorties.

If the comparability study indicates a 25% improvement in reliability for a new subsystem, it will only fail .75 times as often. The data bank MSBMA for the comparable unit must be divided by .75 to get the larger MSBMA value for the new subsystem.

Network with Expendable LRUs

The remainder of this section give examples of some more complex networking problems.

There are many throwaway electrical items coded as on-aircraft remove/replace jobs in MDC reporting which never go into the shop. These include relays, switches, and circuit breakers throughout the aircraft. The shop data bank printout gives the counts of items reported removed and reported in shop, and also shows a G probability of no shop. However, differences in these reported actions do not necessarily mean throwaways. They could be due to bad reporting or have another explanation. LRUs should not be networked as expendable unless it has been confirmed with maintenance technicians in the field.

Figures 22 and 23 show on-aircraft and shop data bank printouts for an aircraft lighting system with expendable LRUs. Only the anti-collision lights 44AGO and 44AHO are processed in the shop. All the rest are throwaways. The four and five digit level shop data were examined to see who removed the items that were processed into the shop. Since it appeared that either 431Xls or 423XOs can do any of these removals, both R tasks lead to a common shop entry node. The G probability of no shop work is included as a dummy task in Figure 24. In this network there are three AFSCs who do work on the equipment. Troubleshoot and functional checks are always done by electricians, but either the electricians or the crew chief can repair or replace failed lighting system components. On rare occasions, the machinist is called out for a mechanical repair. E probabilities for the various specialist corrective tasks were taken from the matrix in Figure 22. The 531XO probability was rounded up so that they sum to 1.00.

The mean job times shown in Figure 22 are not much help in this case since troubleshoot and repair may be done by different specialists. The R and M task times shown in the matrix are entered on the extended Form 11. Troubleshoot was not separately reported in every case, so the 14 hour average time reported is "spread" over the total number of jobs by all specialists:

1.4 Hours x
$$\left(\frac{93 \text{ Reported + Actions}}{219 \text{ Total R + M Actions}}\right)$$
 = .6 Hours

There were not enough functional checks reported separately to warrant a separate task. This work was included within the electricians' trouble-shoot time. The additional time is:

WUC=4+A	AESC= 423X00	23X00	NOM=TEAM WORK 1FSC LENUP	CREW= 4	1.0 HR	1 R ACTIONS
			NUC 44B . AFSC 423XF . MIAN M	JOB TIME= 0.0.	MEAN R JOB	
*UC=44A	AFSC=	423X0	NOM= FM ELECTRICAL	CREW= 1	1.1 HR	7 M ACTIONS
MUCHARA	AFSC=	423 X0	NOM= FM ELECTRICAL	CREW= 2	1.3 HR	34 M ACTIONS
MUC=44A	AFSC=	423X0	NCM= FM ELECTRICAL	CREW= 1	. 9 HR	11 R ACTIONS
MUC=44A	AFSC=	423X0	NOM= EM ELECTRICAL	CREW= 2	1.3 HR	40 R ACTIONS
MUC=44A	AFSC=	423X0	NOM= FM ELECTRICAL	CREW= 1	.3 HR.	9 V ACTIONS
MUC=44A	AESC=	423X0	NOM= FM ELECTRICAL	CREW= 2	S HR	29 V ACTIONS
MUC=44A	AFSC=	423X0	NOM= FM ELECTRICAL	CREW= 1	1.C HR	10 T ACTIONS
WUC=44A	AESC=	423X0	NOM= FM ELECTRICAL	CREM= 2	1.5 HR	82 T ACTIONS
M:JC=44A	AFSC=	423X0	NOM= FM ELECTRICAL	CREW= 3	2.0 HR	1 T ACTIONS
;	: :	EOR MUG	44A .AESC 423XD, MEAN M JOB	JOB LIME= 2.9,	MEAN R JOB	TIME= 2.9
,	1	1				
NJC=44A	AESC=	431X1	NOM= OM FLIGHT LINE	CREM= 1	1.1 HR	28 M ACTIONS
MUC=44A	AFSC=	431X1	NOM= OM FLIGHT LINE	CREW= 2	1.2 HR	14 M ACTIONS
HUC=44A	AFSC=	431X1	NOM ON FLIGHT LINE	CREW= 1	▲9 HR	46 R ACTIONS
MUC=44A	AFSC=	431X1	NOM= OM FLIGHT LINE	CREW= 2	.9 HR	30 R ACTIONS
4 1C=44A	AFSC=	431X1	NCM= OM FLIGHT LINE	CREM= 3	5 HR	2 R ACTIONS
# OC = 4 4 A	AF SC=	431X1	NOM= OM FLIGHT LINE	CREW= 4	• 8 HR	
The same and the same of the s		EOR MUC.	: 44A .AESC 431X1.HEAN M.	JOB TIME: 1.2.	MEAN R JOB	JIME= .9
MUC=44A	AFSC=	531 X0	NOM= FM MACHINE SHOP	CREW= 1	1.3 HR	S M ACTIONS
		FOR MUC	44A , AFSC 531X0, MEAN M	JOB TI	MEAN R JOB	TIME 0.0
		HUC=44A	UNII MSBMA= 66.	PA= 1		1 die
			.*			
*****	***					

Figure 22. Data bank printout for external lighting on aircraft work.

RPR08 .00 .23 .37

42.40

R ELAP 1.00 1.20 0.00

AFSC 423X00 423X0 431X1 531X0

MUC= 44A

	AFSC= 42 AFSC= 42 AFSC= 42 FOR WUC=44AG	3 X 0 3 X 0 4 X 0 4 X 0	NOM= FM NOM= FM NOM= FM NOM= FM REMOVAL UNIT MSBF=	H ELECTRICAL H ELECTRICAL H ELECTRICAL H ELECTRICAL JALS= 25 AD 450 G	CAL CAL CAL ADJUSTE G PROE	AL AL AL AL ADJUSTED COUNT= G PROB= .00243	CREAT 2 CREAT 2 CREAT 2 CREAT 2 CREAT 2 CREAT 2 CREAT 2 CREAT 2 CREAT 2 CREAT 3 CREAT	W= 1 1.0 HR W= 2 1.2 HR W= 1 3.3 HR W= 2 3.5 HR 0 FACTOR=1.042	1 C ACTIONS 3 C ACTIONS 4 WA ACTIONS 28 WA ACTIONS TOTAL IN SHOP=	ONS ONS ONS SHOP=	35° 44 4
*IF RE M AFSC 423X0	EMOVED ITEN WUC=44AG N ELAP 3.44	*****IF REMOVED ITEM REPLACED FROM HUC=44AG HAA HAA HAA HAA HAA HAA HAA HAA HAA H	l .oc.o⊓i	UPPLY H	SUPPLY WHEN AVAILABLES OB K ELAP KMA 1 .37 3	CLABLE: KMA 3	KPR0B	N ELAP4 0.00	NHA4 NP	NPR084	N ELAP
F 2E	HOVED IT	*****IF REHOVED ITEM ALWAYS BENCH	S BENCH CH	ECKED B	SEFORE RE	CHECKED BEFORE REPLACEMENTS	•				
AFSC H	MUC=44AG PROB	FROB KWA KWI		PROB NOT KWA	KWA	COND PROB WE	HF" E	ELAP WF CON	COND PROB NA	FI AD MA	Jan 63

7 7	LE + PO	24 0 KB	100E HI		27.	Z/1-1 HH		WE 7.4	07	• p
1 WF ACTIONS	1 WF ACTIONS	1 C ACTIONS	4 C ACTIONS	TO ACTIONS	S WA ACTIONS	SUCTION AT UK	NA ACTIONS		TOTAL TN SHIP	
	1	_	_	4	1 2.7 HR	2 3.3 HR	2 1.0 HR		ADJUSTED COUNT= 33 Q FACTOR=1.061	7
CREW=	CREW= 2	CREW	CREW= ;	CREN-	CREM=	CREN	CREH=		33 0	OP A=
									COUNT=	.00341
CAL	CAL	CAL	CAL	CAL	CAL	CAL	CAL	E= 3.2	ADJUSTED	G PROB= .00341
FM ELECTRICAL	ELECTRI	M ELECTRICAL	ELECTRI	H ELECTRICAL	ELECTRI	M ELECTRICAL	H ELECTRICAL	FRPR TIM	S= 32	294•
;	<u>.</u>	NCM= FM	NOM= FR	SCH HES	NH HAON	NOW FM	ACM - FM	MEAN CK	REMOVA	T MSBE=
 423X0 I		423X0		423X0	,		423X0	423X0	FOR HUC=44AHO REMOVALS= 35 AD	MUC=44AH0 UNIT MSBF:
AFSC=	AFSC=	AFSC=	AFSC=	AFSC=	AFSC=	AFSC=	AFSC=	HO AFSC=	FOR #	
	NUC=44AHD	MUC=44 AHD	NUC=44AHD	HUC-44 AHD	NUC=44AH0	WUC=44AHD	MUC=44AH0	FOR WUC=44AHO AFSC=	p *	

Figure 23. Data bank printout for external lighting shop work.

	2	١
ď	•	j
,	Z	ì
	Ľ	Ä
	Ų.	į
	۵	Ċ
		j
	a a a	,
		Ì
	ά	•
	40 HU = 1	
	Ľ	ĺ
	_	!
	ū	į
	č	١
	ï	!
	C)
	Į	
	エンス	,
	はいといい	,
	まじるには ひ	
	TUZLE VAV	
	TUNIE VAVS)
	TURKU VAVIOR	
	V AV M IV)
	V AV M IV)
	TURKE VAVS TO SUFF)
	V AV M IV)
	V AV M IV)
	V AV M IV)
	V AV M IV)
	V AV M IV)

10	AFSC HUC=44AH	KWA	THA ELAP		PROB NOT KWA	COND PROB			COND PROB N4	ELAP N4	ວ
AFSC= 423X0 NOM= FM ELECTRIC AFSC= 423X0 NOM= FM ELECTRIC AFSC= 423X0 NOM= FM ELECTRIC AFSC= 423X0 NOM= FM ELECTRIC AFSC= 423X0 NOM= FM ELECTRIC AFSC= 423X0 NOM= FM ELECTRIC AFSC= 423X0 NOM= FM ELECTRIC AFSC= 423X0 NOM= FM ELECTRIC AFSC= 423X0 NOM= FM ELECTRIC AFSC= 423X0 NOM= FM ELECTRIC AFSC= 423X0 NOM= FM ELECTRIC AFSC= 423X0 NOM= FM ELECTRIC AFSC= 423X0 NOM= FM ELECTRIC FOR WUC=44A UNIT MSBF= 173. WUC=44A MMA MPROB K		Ì	3.19		80.	- 20	ŧ	4.23		1.05	; !
UC=44A						Political Control of the Automatical Control of			The comment of the co		
UC=44A AFSC= 423X0 NOM= FM ELECTRICAL UC=44A AFSC= 423X0 NOM= FM ELECTRICAL UC=44A AFSC= 423X0 NOM= FM ELECTRICAL UC=44A AFSC= 423X0 NOM= FM ELECTRICAL UC=44A AFSC= 423X0 NOM= FM ELECTRICAL UC=44A AFSC= 423X0 NOM= FM ELECTRICAL UC=44A AFSC= 423X0 NOM= FM ELECTRICAL UC=44A AFSC= 423X0 NOM= FM ELECTRICAL FOR WUC=44A REMOVALS=153 ADJUSTEI WUC=44A UNIT MSBF= 173. G PROB= WUC=44A WHEN AVAIN WUC=44A WHEN AVAIN			E O N	FM ELE	CTRICAL		CREW	1.8 HR	1 WF ACTIONS		3.4
UC=44A AFSC= 423X0 NOM= FH ELECTRICAL UC=44A AFSC= 423X0 NOM= FF ELECTRICAL UC=44A AFSC= 423X0 NOM= FF ELECTRICAL UC=44A AFSC= 423X0 NOM= FF ELECTRICAL UC=44A AFSC= 423X0 NOM= FF ELECTRICAL UC=44A AFSC= 423X0 NOM= FF ELECTRICAL UC=44A AFSC= 423X0 NOM= FF ELECTRICAL UC=44A AFSC= 423X0 NOM= FF ELECTRICAL FOR WUC=44A REMOVALS=153 ADJUSTEI WUC=44A UNIT MSBF= 173. G PROB= WUC=44A WHEN AVAIN WUC=44A WHEN WHEN AVAIN			NON	FN ELE	CTRICAL		CREW= ;	2 .8 HR	1 WF ACTIONS	NS	
UC=44A AFSC= 423X0 NOM= FM ELECTRICAL UC=44A AFSC= 423X0 NOM= FM ELECTRICAL UC=44A AFSC= 423X0 NOM= FM ELECTRICAL UC=44A AFSC= 423X0 NOM= FM ELECTRICAL UC=44A AFSC= 423X0 NOM= FM ELECTRICAL UC=44A AFSC= 423X0 NOM= FM ELECTRICAL UC=44A AFSC= 423X0 NOM= FM ELECTRICAL FOR WUC=44A REMOVALS=153 ADJUSTEI WUC=44A UNIT MSBF= 173. G PROB= WUC=44A WHEN AVAIN WUC=44A WHAN WPROB K ELAP.			=WON	FMELE	CTRICAL		CREW=	1 .4 HR	3 K ACTIONS		1.1
UC=44A AFSC= 423X0 NOM= EN ELECTRICAL UC=44A AFSC= 423X0 NOM= FN ELECTRICAL UC=44A AFSC= 423X0 NOM= FN ELECTRICAL UC=44A AFSC= 423X0 NOM= FN ELECTRICAL UC=44A AFSC= 423X0 NOM= FN ELECTRICAL FOR WUC=44A REMOVALS=153 ADJUSTEI WUC=44A UNIT MSBF= 173. G PROB= WUC=44A WHEN AVAIN WUC=44A WHEN AVAIN AFSC W ELAP WHAN WPROB K ELAP.			NOM	FN ELE	CTRICAL	,	CREW=	1 2.5 HR		7	71.6
UC=44A AFSC= 423X0 NOM= FM ELECTRICAL UC=44A AFSC= 423X0 NOM= FM ELECTRICAL UC=44A AFSC= 423X0 NOM= FM ELECTRICAL UC=44A AFSC= 423X0 NOM= FM ELECTRICAL FOR WUC=44A REMOVALS=153 ADJUSTEI WUC=44A UNIT MSBF= 173. G PROB= ####IF REFOVED ITEM REPLACED FROM SUPPLY WHEN AVAIT WUC=44A AFSC W ELAP WMA WPROB K ELAP.			∥WON	FN ELE	CTRICAL		CREH=	2 1.7 HR	7 C ACTIO	NS	
UC=44A AFSC= 423X0 NOM= FM ELECTRICAL UC=44A AFSC= 423X0 NOM= FM ELECTRICAL UC=44A AFSC= 423X0 NOM= FM ELECTRICAL UC=44A AFSC= 423X0 NOM= FM ELECTRICAL FOR WUC=44A REMOVALS=153 ADJUSTEI WUC=44A UNIT MSBF= 173. G PROB= *****IF REFOVED ITEM REPLACED FROM SUPPLY WHEN AVAIT WUC=44A AFSC W ELAP WMA WPROB K ELAP.			NON	FN ELE	CTRICAL		CREW=	4 5.1 HR	1 C ACTIONS	NS	ľ
UC=44A AFSC= 423X0 NOM= FM ELECTRICAL UC=44A AFSC= 423X0 NOM= FM ELECTRICAL FOR WUC=44A REMOVALS=153 ADJUSTEI WUC=44A UNIT MSBF= 173. G PROB= *****IF REFOVED ITEM REPLACED FROM SUPPLY WHEN AVAIT WUC=44A AFSC W ELAP WMA WPROB K ELAP.			-WON	FM ELE	CTRICAL		CREM= 1	1 3.0 HR	10 HA ACTIONS		475.9
UC=44A AFSC= 423X0 NOM= FM ELECTRICAL FOR WUC=44A REMOVALS=153 ADJUSTEI MUC=44A UNIT MSBF= 173. G PROB= *****IF REFOVED ITEM REPLACED FROM SUPPLY WHEN AVAIT WUC=44A AFSC W ELAP WMA WPROB K ELAP			HNON	FY ELE	CTRICAL		CREW=	2 3.3 HR	67 WA ACTIONS	NS	
FOR WUC=44A REMOVALS=153 ADJUSTED WUC=44A UNIT MSBF= 173. G PROB= *****IF REFOVED ITEM REPLACED FROM SUPPLY WHEN AVAIT WUC=44A AFSC W ELAP WMA WPROB K ELAP			=WON	FM ELE	CTRICAL		CREM= 2		2 N4 ACTIONS		4.2
*****IF REPOVED ITEM REPLACED FROM SUPPLY WHEN AVAIL WUG=44A AFSC W ELAP WMA WPROB K ELAP	F0	ï		OVALS=1		ADJUSTED COUNT=140	0	FACTOR=1.093	TOTAL IN	SHOP= 84.	.
*****IF REPOVED ITEM REPLACED FROM SUPPLY WHEN AVAIL WUC=44A AFSC W ELAP WMA WPROB K ELAP		C=44A	_			e= • uuo ya	TAT I	•			
WUC=44A AFSC W ELAP WMA WPROB K ELAP	*IF REFOVED	ITEM REPL	ACED FR	OM SUPP	LY WHEN AVA	ILABLE					
M ELAP WMA WPROB	44=20H	₩									
				MPROB	K ELAP .	KMA	KPROB	N ELAP4	NMA4 NP	NPROB4 N	N E
423X0 3.30 799437			6,	*6 •	• 37	m	*0	1.05	~	• 02	•

Figure 23 (Continued)

ELAP N4 1.05

COND PROB N4

ELAP WF 3.53

COND PROB WF

KWA ELAP PROB NOT KWA 3.19 .05

PROB KWA .95

#ED I. NUC=44A AFSC PROB 423X0

******IF REMOVED ITEM ALMAYS BENCH CHECKED BEFORE REPLACEMENT:

coding
network
Lightino
External
24.
Figure 24.

	***************************************	<u></u>			۲ ب	۱	- 127	· 	1		- γ				·-'T	<u></u> j			٠	,		
ud	Continuati	8					-37			7			-			_						
	*	2		+	-+			-1		_									40			
	/Voe					7			1							3.7	*:		1			
	ပ္တိ	3		+														. **	. *			
	AFSC	75 76 77				10.00				3,				_								
•	Z	2			\Box						_	_										
		23	_				{	{					┯┥			{						
		2									-		\dashv									
	¥	-			0						-			-1								
	2	4	┯┪		췽		 ∤	-1				\neg	_	-1								
	AFSC / AGE	48 69 70 71 72			Ä																	
•		29			3									\Box								
•		3											7				200					
,	, w	3			\subseteq					_			3	_			AFLC-WPAFB-JAN 74					
	AFSC / AGE	3			×								79				ì		÷			
)	3			-	0							3			-	FAF					
	S.	٥			#	9						-5	-				Į		- 2			
		39 60 61 62 63 64 65			3	7				-			Σ	_			¥.					
		\$				-							X						٠			
		١	_		3	0	7	_	0	0	0		7		0	0						•
1.	9	[5]			×	×	×	×	×	×	×				×	×						
		55 54 57 58	S		\leq	m	-		3	3	1		Z		3	6	i					
	AFSC / AGE	:	F		~	7	3	9	2	7	3		7	النم	7	42						
	<	3	H		4	+	+	+	4	14	5	├ -	70		24	1	1					
		22	9		-	7	1	_	2	2	1	\vdash	5	_	14	-	}					
	eqyl . faid	1 82	*		-	4		7	7	J	7		7		7	1	Ì					
	1 **:G	50 31	7	_	=	-	76	76	16	16	16	-	7	5,1	-	6	Ì					
	* * *	99	4		N	2	~	7	त	2	7		2		N	7						
	. >	3	₹	· -							14.54		₹									
		Ė	Ž		~	7	6	2	7	3	3				+	4						
	w 😨		Y		0	0	0	n			1		1	**.	6	1						
	HOURS	97 50 77	E						<u> </u>			L	E		ļ .		=		,			
	HOURS (Tenths)	3	7										P			-	픙					
		13	X						-				4/2			-	S	- 1				
	Yijoir	12	E			_	_		_		-	~	~	3	6	6	TR.					
	Type Task			2	8	2	7	~	2	2	N	N		2	2	2	æ			:	•	
	Release	8		•					-						*	*2	3					
			~		_				_	_		_)	_	_	_					
		3	0	0	0	0	0	٥	0	9	0	0	0	0	0	10	13					
	<u>.</u>	8	0	0	0	0	0	0	0	0	0	0	0	0	0	0	S					
	Z X	8	AO	A	Ao	OY	0	O W	0 4	AO	A	0	AO	AO	AO	A O O	PUNCH CARD TRANSCRIPT					
	KLOK lock No.	8	4 A O	440	4A0	0 Y +	9 ¥ 0	4 A O	4 A O	0 W +	440	440	044	4 40	044	1	PUNCE					
	NCLOK Clock No.	36 35 36 37	AO	A	Ao	OY	0	O W	0 4	AO	A	0	AO	AO	AO	44400	PUNCE					
		2 33 34 35 36 37	4 A O	44A0	4A0	0 Y +	9 ¥ 0	4 A O	4 A O	0 W +	440	440	044	4 40	044	1	PUNCH					
		2 33 34 35 36 37	4 A O	6 44 AO	4A0	0 Y +	4 4 A O	4 4 A O	4440	4440	44A0	440	044	3 4440	4440	4	PUNCH					
	·	30 31 32 33 34 35 36 37	944A	44A0	4A0	0 Y +	7 4 4 A O	4 4 A O	3 4440	9 4440	2 4440	440	044	243 4440	1 4440	446	PUNCH				,	
	·	30 31 32 33 34 35 36 37	944A	6 44 AO	4A0	0 Y +	7 4 4 A O	4 4 A O	3 4440	19 4440	2 4440	440	044	0243 4440	1 4440	446	PUNCH			9	4	
	·	30 31 32 33 34 35 36 37	944A	6 44 AO	4A0	0 Y +	7 4 4 A O	4 4 A O	3 4440	19 4440	2 4440	440	044	243 4440	1 4440	446	PUNCH			75.	4	
	MSBf or Probability	30 31 32 33 34 35 36 37	944A	04440	0444	0444	37 4440	19 44AO	23 44A0	0444 61	02 44A0	444	044	00243 4440	0844 16	44 60	PUNCH			3		
	·	26 27 28 29 30 31 32 33 34 35 36 37	44A0	6 44 AO	4A0	0 Y +	7 4 4 A O	4 4 A O	E 23 44A	19 4440	2 4440	440	044	G 00243 44A0	1 4440	446	PUNCH		•	8		
	Sel. Mode	25 36 27 28 29 30 31 32 33 34 35 36 37	4 4 A O	04440	0444	3 3	E 37 4440	19 44AO	4 E 23 44Ao	0444 61	02 44A0	0 D	4440	G 00243 44A0	0844 16	44 60	PUNCH		•	*		
	Sel. Mode	25 36 27 28 29 30 31 32 33 34 35 36 37	4 4 A O	0 F 66 44 AO	D 44A0	03 3	04 E 37 44Ao	19 44AO	04 E 23 44A0	0444 61	02 44A0	00 D	4440	GO 6 00243 44A0	0844 16	44 60	PUNCH		•	4		
	Sel. Mode	25 36 27 28 29 30 31 32 33 34 35 36 37	4 4 A O	A01 F 66 44A0	AOZ D 44AO	A03 D 44A0	A04 E 37 44A0	19 44AO	A04 E 23 44A0	0444 61	02 44A0	A00 D +4A0	4440	GO 6 00243 44A0	0444 /6 3	44 60	PUNCH		•	8		
	Sel. Mode	25 36 27 28 29 30 31 32 33 34 35 36 37	4 4 A O	4 AOI F 66 44 AO	4 A O 2 D 4 4 A O	4 A O 3 D	4A04 E 37 44A0	19 44AO	4A04 E 23 44A0	0444 61	02 44A0	4A00 D	4440	4AGO 6 00243 44A0	0844 16	44 60	PUNCH		•			
	MSBf or Probability	25 36 27 28 29 30 31 32 33 34 35 36 37	44A0	A01 F 66 44A0	AOZ D 44AO	A03 D 44A0	A04 E 37 44A0	19 44AO	A04 E 23 44A0	0444 61	02 44A0	D 4 A O O D + 4 A A O	4440	24AGO 6 00243 44A0	E 91 44A0	44 60	PUNCH		•			
	Sel. Mode	19 20 21 22 22 22 24 25 26 27 28 39 30 31 32 33 34 35 36 37	444	4 AOI F 66 44 AO	4 A O 2 D 4 4 A O	4 A O 3 D	4A04 E 37 44A0	19 44AO	4A04 E 23 44A0	0444 61	02 44A0	4A00 D	4440	4AGO 6 00243 44A0	0444 /6 3	44 60	PUNCH			4		
	Sel. Mode	19 20 21 22 22 22 24 25 26 27 28 39 30 31 32 33 34 35 36 37	444	D4401 F 66 44A0	D4 A O 2 D 4 4 A O	D4403 D 4440	D4404 E 37 4440	19 44AO	34404 E 23 4440	0 4 4 4 4 A A	E 02 4440	D 4 A O O D + 4 A A O	4440	0 ID4AGO 6 00243 44A0	0	0 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4						
	MSBF or	19 20 21 22 22 22 24 25 26 27 28 39 30 31 32 33 34 35 36 37	444	0 DAROI F 66 44A0	O DAROZ D 44AO	4 A O 3 D	4A04 E 37 44A0	19 44AO	4A04 E 23 44A0	0444 61	02 44A0	D 4 A O O D + 4 A A O	6,0	60 ID4AGO 6 00243 44A0	60 81 4440	0 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4				· ·		
	MSBF or	19 20 21 22 22 22 24 25 26 27 28 39 30 31 32 33 34 35 36 37	444	A00 D4A01 F 66 44A0	AOO DAAOZ D 4AAO	A C D D D D D D D D D D D D D D D D D D	A00 D4A04 E 37 4440	A O O I I I I I I I I I I I I I I I I I	AOO DAAO4 E 23 44AO	A00 E 19 44A0	A00 E 02 44A0	P SD4AOO D +4AO	6,0	60 ID4AGO 6 00243 44A0	60 81 4440	0 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4						
	Sel. Mode	19 20 21 22 22 22 24 25 26 27 28 39 30 31 32 33 34 35 36 37	444	4A00 DARON F 66 44A0	4A00 D4A02 D 44A0	4A00 D4A03 D	4400 D4404 E 37 4440	4A00 E	4A00 D4A04 E 23 44A0	4A00 E 19 44A0	4 4 0 0 2 4 4 4 0 0 2 4 4 4 0 0 0 2 4 4 4 0 0 0 0	SD4AOOD T	4460 # 4440	4ABO ID4AGO 6 00243 44A0	4AGO E 91 44AO	4 A G O 69 44						
	WCC MSBf or	13 14 15 16 17 18 19 20 21 22 22 24 25 26 27 28 29 30 31 32 33 34 35 36 37	#	44A00 DARON F 66 44A0	44A00 D4A02 D 44A0	A C D D D D D D D D D D D D D D D D D D	44A00 D4A04 E 37 44A0	44A00 E 19 44A0	44A00 D4A04 E 23 44A0	44A00 E 19 44A0	44400 E	HØP SD4AOO D	6,0	44ABO ID4AGO 6 00243 44A0	44AGO E 91 44AO	44AGO E 09 44				•		
	Z Sel: Mode	13 14 15 16 17 18 19 20 21 22 22 24 25 26 27 28 29 30 31 32 33 34 35 36 37	#	4A00 DARON F 66 44A0	4A00 D4A02 D 44A0	4A00 D4A03 D	4400 D4404 E 37 4440	44A00 E	4A00 D4A04 E 23 44A0	4A00 E 19 44A0	44400 E	SD4AOOD T	4460 # 4440	4ABO ID4AGO 6 00243 44A0	4AGO E 91 44AO	44AGO E 09 44				*		
=	Z Sel: Mode	13 14 15 16 17 18 19 20 21 22 22 24 25 26 27 28 29 30 31 32 33 34 35 36 37	#	F44A00 D4A01 F 66 44A0	ATTROO DTAOZ D 44AO	T44A00 D4A03 D	R44A00 D4A04 E 37 44A0	M44A00 E 19 44A0	RAFACO DAMOS E 23 44AO	M44A100	M44400	SHØP SD4AOO D	4460 # 4440	44ABO ID4AGO 6 00243 44A0	44AGO E 91 44AO	K44AGO						
11 W 1	Z Sel: Mode	13 14 15 16 17 18 19 20 21 22 22 24 25 26 27 28 29 30 31 32 33 34 35 36 37	#	0 FF4400 DARON F	1 AFFROO DFROZ D 4FRO	2 T44A00 D4A03 D	3 RH4400 D4404 E 37 4440	44A00 E 19 44A0	3 RF 4 AOO DA AO4 E 23 44AO	44A00 E 19 44A0	M44400	4 SHOP SDAROO D	4460 # 4440	00 L44A60 ID4AGO G 00243 44A0	GO W44AGO E 91 44AO	GO X444 GO E						
0RM 11	Z Sel: Mode	13 14 15 16 17 18 19 20 21 22 22 24 25 26 27 28 29 30 31 32 33 34 35 36 37	#	00 F44A00 D4A01 F 66 44A0	ATTROO DTAOZ D 44AO	02 T44A00 D4A03 D	R44A00 D4A04 E 37 44A0	3 m44A00	A03 RF4A00 DAA04 E 23 44A0	A03 M44A00	A 0 3 M 4 4 A 0 0 0 2 4 4 A D	A O 4 SHOP SD4AOO D	4460 # 4440	A00 144A60 ID4AGO 6 00243 44A0	AGO W44AGO E 91 44AO	GO X444 GO E						
7, 2 FORM 11	Z Sel: Mode	13 14 15 16 17 18 19 20 21 22 22 24 25 26 27 28 29 30 31 32 33 34 35 36 37	#	0 FF4400 DARON F	4 AO 1 ATTAOO DAAOZ D 44AO	02 T44A00 D4A03 D	4 AO3 R44AOO D4AO4 E 37 44AO	4 A O 3 M 4 4 A O O E E 1 9 4 4 A O	4A03 RF4A00 DAA04 E 23 44A0	4403 M44400	FA03 M44400	4 A S H S D S D 4 A O O D	4460 # 4440	4A00 144A60 ID4AGO G 00243 44A0	4AGO W44AGO E 81 44AO	4 A G O K 4 4 A G O O O O O O O O O O O O O O O O O O	EPITONS OF THIS FORM WILL BE USED CX IS EDWINSTED.					
No. 2 ED FORM 11	Z Sel: Mode	13 14 15 16 17 18 19 20 21 22 22 24 25 26 27 28 29 30 31 32 33 34 35 36 37	#	A00 F#4A00 D4A01 F 66 44A0	AOI AFFIROO DAROZ D 4FRO	A 02 TA-A 00 DA A 03 D	AO3 R44AOO D4AO4 E 37 44AO	A03 M44A00	A03 RF4A00 DAA04 E 23 44A0	A03 M44A00	FA03 M44A00	4AO4 SHOP SD4AOO D	4460 # 4440	4A00 144A60 ID4AGO G 00243 44A0	4AGO W44AGO E 81 44AO	D4AG0 K44AG0	PREVIOUS EDMONS OF THIS FORM WILL BE USED UMPT. STOCK IS EDMUSTED.					
T No. 2 NDED FORM 11	Z Sel: Mode	4 4 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 28 24 25 26 27 28 29 30 31 32 33 34 35 36 37	0 V + +	4A00 F44A00 D4A01 F	4 AO 1 ATTAOO DAAOZ D 44AO	4 A O O D A A O O T A A A O O D A A O O D O O O O O O O O O	4 AO3 R44AOO D4AO4 E 37 44AO	4 A O 3 M 4 4 A O O E E 1 9 4 4 A O	4A03 RF4A00 DAA04 E 23 44A0	4403 M44400	FA03 M44400	4 A S H S D S D 4 A O O D	4460 # 4440	A00 144A60 ID4AGO 6 00243 44A0	4AGO W44AGO E 81 44AO	D4AG0 K44AG0	PERVOUS EPRIONS OF THIS FOLM WILL BE USED UNTIL STOCK IS EPRAUSTED.					
PUT No. 2 Tended Form 11	Z Seel. Mode	A 6 4 7 8 9 9 10 11 12 13 14 15 16 17 18 19 20 21 22 22 22 24 25 26 27 28 29 30 31 22 33 34 35 30 37	0 V + +	4A00 F44A00 D4A01 F	4 AO 1 ATTAOO DAAOZ D 44AO	4 A O O D A A O O T A A A O O D A A O O D O O O O O O O O O	4 AO3 R44AOO D4AO4 E 37 44AO	4 A O 3 M 4 4 A O O E E 1 9 4 4 A O	4A03 RF4A00 DAA04 E 23 44A0	4403 M44400	FA03 M44400	4 A S H S D S D 4 A O O D	4460 # 4440	4A00 144A60 ID4AGO G 00243 44A0	4AGO W44AGO E 81 44AO	D4AG0 K44AG0	PERVOUS EPRIONS OF THIS FOLM WILL BE USED UNTIL STOCK IS EPRAUSTED.					
INPUT No. 2 EXTENDED FORM 11	Z Seel. Mode	A 6 4 7 8 9 9 10 11 12 13 14 15 16 17 18 19 20 21 22 22 22 24 25 26 27 28 29 30 31 22 33 34 35 30 37	0 V + +	4A00 F44A00 D4A01 F	4 AO 1 ATTAOO DAAOZ D 44AO	4 A O O D A A O O T A A A O O D A A O O D O O O O O O O O O	4 AO3 R44AOO D4AO4 E 37 44AO	4 A O 3 M 4 4 A O O E E 1 9 4 4 A O	4A03 RF4A00 DAA04 E 23 44A0	4403 M44400	FA03 M44400	4 A S H S D S D 4 A O O D	4460 # 4440	4A00 144A60 ID4AGO G 00243 44A0	4AGO W44AGO E 81 44AO	D4AG0 K44AG0	PERVOUS EPRIONS OF THIS FOLM WILL BE USED UNTIL STOCK IS EPRAUSTED.					
INPUT No. 2 EXTENDED FORM 11	Z Seel. Mode	4 4 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 28 24 25 26 27 28 29 30 31 32 33 34 35 36 37	# # # # # # # # # # # # # # # # # # #	4A00 F44A00 D4A01 F	4 AO 1 ATTAOO DAAOZ D 44AO	4 A O O D A A O O T A A A O O D A A O O D O O O O O O O O O	4 AO3 R44AOO D4AO4 E 37 44AO	4 A O 3 M 4 4 A O O E E 1 9 4 4 A O	4A03 RF4A00 DAA04 E 23 44A0	4403 M44400	FA03 M44400	4 A S H S D S D 4 A O O D	4460 # 4440	4A00 144A60 ID4AGO G 00243 44A0	4AGO W44AGO E 81 44AO	D4AG0 K44AG0	PREVIOUS EDMONS OF THIS FORM WILL BE USED UMPT. STOCK IS EDMUSTED.					
INPUT No. 2 EXTENDED FORM 11	Z Seel. Mode	2 4 4 7 6 8 9 9 10 11 12 13 14 13 16 17 14 19 20 21 22 23 24 25 26 27 28 27 30 31 32 30 34 35 30 37	# # # # # # # # # # # # # # # # # # #	4A00 F44A00 D4A01 F	4 AO 1 ATTAOO DAAOZ D 44AO	4 A O O D A A O O T A A A O O D A A O O D O O O O O O O O O	4 AO3 R44AOO D4AO4 E 37 44AO	4 A O 3 M 4 4 A O O E E 1 9 4 4 A O	4A03 RF4A00 DAA04 E 23 44A0	4403 M44400	FA03 M44400	4 A S H S D S D 4 A O O D	4460 # 4440	4A00 144A60 ID4AGO G 00243 44A0	4AGO W44AGO E 81 44AO	D4AG0 K44AG0	FOW 1530 PREVIOUS EDITIONS OF THIS FORM WILL BE USED FIRST 1530 UNIT, STOCK IS EDWANTED.					

Pro 2 Pro 1 Pro 2 Pro		ngi19vniina) ·	21	1 -	7	1	- I	7	T				1	1	•	_	3
The D form 11 The D form 12 The D form 13 The D form 14 The D form 14 The D form 15 The D form 16 The D form 1	1		+;	Ēt—	+-	_	┪~	+-	+-	+	1	+	+	+-	+	 		1
Ded Corw 1 Corw 1 Corw 1 Corw 1 Corw 1 Corw 1 Corw 1 Corw 1 Corw 1 Corw	1	;	أإ	2	+-	+	1	1	1-	+	+	+	+	+	┿	 		1
Ded Corw 1 Corw 1 Corw 1 Corw 1 Corw 1 Corw 1 Corw 1 Corw 1 Corw 1 Corw	l		Sti	:	1	1	1	1	_	1	_	1	1	+	+=	t	1-	1
The D form 11 The D form 12 The D form 13 The D form 14 The D form 14 The D form 15 The D form 16 The D form 1	l			:	_	+-	+-	1	+-	+	+	+-	+-	+-	+	 	├	1
Ded Corw 1 Corw 1 Corw 1 Corw 1 Corw 1 Corw 1 Corw 1 Corw 1 Corw 1 Corw	1		₹ ;		I	1.	J			1			—	1	†	 	 	1
Ded Corw 1 Corw 1 Corw 1 Corw 1 Corw 1 Corw 1 Corw 1 Corw 1 Corw 1 Corw	1		Z);	ı I	$oldsymbol{\Box}$	J.		\mathbf{I}	I^-		Γ		1	1	1	1		1
Ded Corw 1 Corw 1 Corw 1 Corw 1 Corw 1 Corw 1 Corw 1 Corw 1 Corw 1 Corw	l			: 🗆	\Box		\mathbf{I}^{-}		$oldsymbol{\mathbb{L}}$			\mathbf{L}	I		1			1
Ded Corw 1 Corw 1 Corw 1 Corw 1 Corw 1 Corw 1 Corw 1 Corw 1 Corw 1 Corw	ŀ		ŀ		\mathbb{L}	\mathbb{T}	П					T	1	T	1			1
Ded Corw 1 Corw 1 Corw 1 Corw 1 Corw 1 Corw 1 Corw 1 Corw 1 Corw 1 Corw	l	9	2						1.		T^{-}	Ι					_	1
Ded Corw 1 Corw 1 Corw 1 Corw 1 Corw 1 Corw 1 Corw 1 Corw 1 Corw 1 Corw			E					$oxed{oxed}$				T						1
Ded Corw 1 Corw 1 Corw 1 Corw 1 Corw 1 Corw 1 Corw 1 Corw 1 Corw 1 Corw		2	1			ŀ			Γ		\mathbf{L}	T						1
Ded Corw 1 Corw 1 Corw 1 Corw 1 Corw 1 Corw 1 Corw 1 Corw 1 Corw 1 Corw			13	Ц		_]
Ded Corw 1 Corw 1 Corw 1 Corw 1 Corw 1 Corw 1 Corw 1 Corw 1 Corw 1 Corw			Ŀ	<u> </u>	┵	<u>بــــــــــــــــــــــــــــــــــــ</u>	╄		<u> </u>		_]
TO 0. 2 TO 0. 1 TO 0. 2 TO 0			13	<u> </u>		-	1_		1	<u> </u>	<u> </u>		┸					្ត្រ
TO 0. 2 TO 0. 1 TO 0. 2 TO 0		4	13	<u> </u>	∔ ∃	-	-		1	1	 	4	1	<u> </u>	-] :
TOO. 2 TOO. 2 TOO. 3 T		3		-	٧	<u>!</u>	 	-	╀-	<u> </u>	<u>Ļ</u>	↓_	1	<u> </u>	_		L.,	ļŝ
TOO. 2 TOO. 2 TOO. 3 T		3	Ĕ	-	15	<u> </u>	┼	 	┼	—	├ ──	Ļ	-	ـــ				Į
TOO. 2 TOO. 2 TOO. 3 T		<u> </u>	P	-	+2	4-	+	-	+	<u> </u>	╄	↓_	↓	Ļ.	↓			}
TO 0. 2 TO 0. 1 TO 0. 2 TO 0			١	 	┼╼	.	+	+	╂	 	├	1-	┼	 	1			AFLC-WPAFB-JAN 74 500
TOO. 2 TOO. 2 TOO. 3 T		·	13		 €	-	┼	┿	┼	₩	╄		┼	-	et *			١,
TO 2 TO 4 TO 4 TO 4 TO 4 TO 4 TO 5			늘	+	10	-	+-	40	+	-	┼	┼	+		1			1
Pro. 2 Pro. 2 Pro. 2 Pro. 2 Pro. 3 Pro. 4 Pro. 4 Pro. 4 Pro. 4 Pro. 5 P			F	1	12		╁	1 3		-	┼	-	╂	<u> </u>				l
Pro. 2 Pro. 2 Pro. 2 Pro. 2 Pro. 3 Pro. 4 Pro. 4 Pro. 4 Pro. 4 Pro. 5 P			1	+	+2	` 	╁	∜∺	+	+-	-	1	+	-				ł
Pro. 2 Pro. 2 Pro. 2 Pro. 2 Pro. 3 Pro. 4 Pro. 4 Pro. 4 Pro. 4 Pro. 5 P		ŷ	1	1-	+-7	:-	+\;	4	' 	 	-	+-		 	1		<u> </u>	
Pro. 2 Pro. 2 Pro. 2 Pro. 2 Pro. 3 Pro. 4 Pro. 4 Pro. 4 Pro. 4 Pro. 5 P		Ĭ.	۳	+	+3	1	+17	+ 17	+	 								ł
Pro. 2 Pro. 2 Pro. 2 Pro. 2 Pro. 3 Pro. 4 Pro. 4 Pro. 4 Pro. 4 Pro. 5 P			9	+	188]	17	1 3	+	 		1/-	+	 		\vdash		ł
The Porm 1 1 1 1 1 1 1 1 1			2	-	10	7-	+-,	177	₩	- /		╂	+	 	┥			ŀ
The Porm 1 1 1 1 1 1 1 1 1		egyl . fziG	Ē	1-	Ť	1	+-	1 -	1	u	-	+	+-	-	 _ 			ŀ
The part 1 1 1 1 1 1 1 1 1			9	_	T-	 	10	10	+-		_	1	\vdash	_				1
No. 2 No.		∀ ≪	8		ľΣ	1	1	lñ	1.	8	7	 "	1-		-4	-		
No. 2 No.		>	=			:	Ţ- <u>·</u> ·	۲,	1	7	-	†	T	T.				
Prior No.2 Prior No.2 Prior No.2 Prior No.2 Prior No.2 Prior No.2 Prior No.2 Prior No.2 Prior No.2 Prior No.2 Prior No.2 Prior No.2 Propagation of the Prior No.2 Propagation of the Prior No.2 Propagation of the Prior No.2 Propagation of the Prior No.2 Propagation of the Prior No.2 Propagation of the Prior No.2 Propagation of the Prior No.2 Prior No.2			6		7		17	0	1-	6	<u> </u>	1	9.	1				١.
No. 2 Property P		w 🗟	3		Q/		M	-	1	Z		1						
DED FORM 11 DED FORM 11 DED FORM 11 DED FORM 11 DED FORM 11 DED FORM 11 DED FORM 11 DED FORM 12 DED FORM 12 DED FORM 13		<u> </u>	3		تنا	T	Ţ	1	1	W		1	1			\dashv	\neg	_
DED FORM 11 DED FORM 11 DED FORM 11 DED FORM 11 DED FORM 11 DED FORM 11 DED FORM 11 DED FORM 12 DED FORM 12 DED FORM 13		ةٍ كِ	1		_ ₹	\Box		1	$\overline{}$	ā	,		1	\Box		 [=
DED FORM 1		- 5	3	L	10				1	74		<u> </u>	1					Š
DED FORM 11 11 12 13 14 14 15 15 15 15 15 15			4		7					W					1	一十	\neg	¥
DED FORM 1 1 1 1 1 1 1 1 1		Minoin	Ŧ	=		3	~	3	_		3							2
DED FORM 1 1 1 1 1 1 1 1 1		Type Task	8	K		K	N	7	K		R							2
DED FORM 1 1 1 1 1 1 1 1 1		espoled	8		1	1	1 SE	1					$\overline{}$					₹
DED FORM 11 Prior Node Pr			-	_				1	_		_	_				J	7	Ü
DED FORM 11 Prior Node Pr			38	0	0			0	0		O							Ξ.
DED FORM 11 Prior Node Note N			38	0	0	0	0	0	0	0	00							NCH C
No. 2 No.			38	0 V	AO	A 0	Aoc	AOC	A	AO	A				- 2-			PUNCH CARD TRANSCRIPT
No. 2 No.			38	0 V	4 A O	4 A A O	4 A O C	4 A O C	4 A O	4 A 0	4 A			_	- 2-			PUNCH C
No. 2 No.			34 35 36 37 38	0 V	4 A O	4 A A O	4 A O C	4 A O C	4 A O	4 A 0	4 A	2.50		_	- 2-			PUNCH C
DED FORM 11 DED FORM 11 DED FORM 11 DED FORM 11 DED FORM 12 DED FORM 12 DED FORM 13 DED FORM 12 DED FORM 13 DED FORM 14 DED FORM 15 DED FORM 1		NCLOK Clock No.	33 34 35 36 37 38	44 A O	4 A O	4 A A O	4 A O C	4 A O C	4 A O	4 A 0	4 4 A			_	- 2-			PUNCH C
DED FORM 11 DED FORM 11 DED FORM 11 DED FORM 11 DED FORM 12 DED FORM 12 DED FORM 13 DED FORM 12 DED FORM 13 DED FORM 14 DED FORM 15 DED FORM 1		NCLOK Clock No.	33 34 35 36 37 38	44 A O	4 A O	1 44 A O	4 A O C	4 A O C	4 A O	1914A0	1 44A	, the c	- 40 - 4	_	- 2-			PUNCH C
No. 2 No.		NCLOK Clock No.	33 34 35 36 37 38	44 A O	4 A O	41 44 AO	4 A O C	4 A O C	4 A O	1914A0	1 44A	, the c	- 40 - 4	_	- 2-			PUNCH C
DED FORM 11 DED FORM 11 DED FORM 11 DED FORM 11 DED FORM 12 DED FORM 12 DED FORM 13 DED FORM 12 DED FORM 13 DED FORM 14 DED FORM 15 DED FORM 1		NCLOK Clock No.	33 34 35 36 37 38	44 A O	4 A O	341 44 AO	4 A O C	4 A O C	4 A O	1914A0	1 44A	, the c	- 40 - 4	_	- 2-			PUNCH C
DED FORM 11 DED FORM 11 DED FORM 11 DED FORM 11 DED FORM 12 DED FORM 12 DED FORM 13 DED FORM 13 DED FORM 14 DED FORM 15 DED FORM 1		NCLOK Clock No.	33 34 35 36 37 38	44 A O	4 A O	0341 44A0	4 A O C	4 A O C	4 A O	1914A0	1 44A	, the c	- 40 - 4	_	- 2-			PUNCH C
DED FORM 11 DED FORM 11 DED FORM 11 DED FORM 11 DED FORM 12 DED FORM 12 DED FORM 13 DED FORM 13 DED FORM 14 DED FORM 15 DED FORM 1		NCLOK Clock No.	33 34 35 36 37 38	44 A O	4 A O	0341 44A0	4 A O C	4 A O C	4 A O	1914A0	1 44A	, the c	- 40 - 4	_	- 2-			DUNCH C
1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1		NCLOK Clock No.	33 34 35 36 37 38	44 A O	4 A O	00341 44A0	44 AO	44 AOC	44 A O	1914A0	003911 44A	, the c	- 40 - 4	_	- 2-			PUNCH C
1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1		MASE or NCLOK	26 27 28 29 30 31 32 33 34 35 36 37 38	44 A O	9 A 9 A O	00341 44A0	44 AO	44 AOC	44 A O	- 44A0	003911 44A	, the c	- 40 - 4	_	- 2-			PUNCH C
1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1		MASE or NCLOK	26 27 28 29 30 31 32 33 34 35 36 37 38	0 D 44 A 0	9 A 9 A O	0 G 00341 44 A0	44 AO	44 AOC	44A0	- 44A0	003911 44A	, the c	- 40 - 4					PUNCH C
1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1		MASE or NCLOK	26 27 28 29 30 31 32 33 34 35 36 37 38	60 D 44 A 0	9 A 9 A O	HO G 00341 44A0	44 AO	44 AOC	D 44A0	- 44A0	003911 44A		- 40 - 4					PUNCH C
1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1		MASE or NCLOK	26 27 28 29 30 31 32 33 34 35 36 37 38	A60 D 44 A0	9 A 9 A O	AHO 6 00341 44A0	E 44 A 0	E A4AOC	D 44A0	H	003911 44A		- 40 - 4					PUNCH C
1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1		MASE or NCLOK	26 27 28 29 30 31 32 33 34 35 36 37 38	A60 D 44 A0	9 A 9 A O	AHO 6 00341 44A0	E 44 A 0 C	4440	D 44A0	H	003911 44A		- 40 - 4			\$		D HONCH
1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1		MASE or NCLOK	26 27 28 29 30 31 32 33 34 35 36 37 38	D4AGO D 44AO	9 A 9 A O	D4 AHO G 00341 44 AO	E 44 A 0 C	4440	D 44A0	H	003911 44A		- 40 - 4					DUNCH C
1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1		MASE or NCLOK	26 27 28 29 30 31 32 33 34 35 36 37 38	D4AGO D 44AO	9 A 9 A O	D4 AHO G 00341 44 AO	E 44 A 0 C	4440	D 44A0	H AAAO	003911 44A		- 40 - 4					D HUNGH
1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1		MASE or NCLOK	26 27 28 29 30 31 32 33 34 35 36 37 38	ID4AGO D 44 AO	H 44 A0	ID4AHO G 00341 44A0	E 44A0	E	D 44A0	H 44A0	G 003911 44A							DONCH C
1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1		MASE or NCLOK	26 27 28 29 30 31 32 33 34 35 36 37 38	O IDAAGO D 44AO	0 H H 44 A0	O ID4AHO G 00341 44A0	O E 44AD	0 E 44 A0 C	0 44A0	0 H	G 003911 44A							
1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1		MASE or NCLOK	26 27 28 29 30 31 32 33 34 35 36 37 38	GO ID4AGO D 44AO	60 H 49 A0	40 ID4AHO G 00341 44A0	HO E 44 AO	HO E A4AOC	HO 44AO	0 H	00 6 00391 444							
1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1		MASE or NCLOK	26 27 28 29 30 31 32 33 34 35 36 37 38	AGO ID4AGO D 44AO	AGO H H 44AO	AHO IDAAHO G 00341 44A0	AHO E 44AOC	AHO E AAAOC	AHO 44AO	AOO H AAAO	A00 6 00391 44A							
1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1		MASE or NCLOK	26 27 28 29 30 31 32 33 34 35 36 37 38	4 AGO ID4AGO D 44 AO	4A60 H 44A0	4AHO ID4AHO G 00341 44A0	4AHO E 44AOC	4AHO E A4AOC	4 A H I A 4 4 A O	4 A 0 0 H	4A00 6 00391 44A							
1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1		MASE or NCLOK	26 27 28 29 30 31 32 33 34 35 36 37 38	4 AGO ID4AGO D 44 AO	44A60 H H 44A0	44AHO ID4AHO 6 00341 44AO	4AHO E 44AOC	44AHO	4 A H I A 4 4 A O	44 A O O H H A A A A O	44A00 6 00391 44A							
1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1		MASE or NCLOK	26 27 28 29 30 31 32 33 34 35 36 37 38	4 AGO ID4AGO D 44 AO	44A60 H H 44A0	44AHO ID4AHO 6 00341 44AO	4AHO E 44AOC	44AHO	4 A H I A 4 4 A O	44 A O O H H A A A A O	44A00 6 00391 44A							
1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1		A WUC Next Node 59 Probability . Clock No.	26 27 28 29 30 31 32 33 34 35 36 37 38	Q44AGO ID4AGO D 44AO	44A60 H H 44A0	144AHO ID4AHO G 003411 44A0	W44AHO E A4AOC	N44AHO E A4AOC	Q44AHO 44AO	44 A O O H H A A A A O	L44A00 6 00391 44A							
	th 11	A WUC Next Node 59 Probability . Clock No.	26 27 28 29 30 31 32 33 34 35 36 37 38	O 044AGO ID4AGO D 44AO	44A60 H H 44A0	0 L44AHO ID4AHO G 00341 44A0	O W44AHO E 44AOC	O N44AHO E A4AOC	0 Q44AH0 44A0	44 A O O H H A A A A O	0 L44A00 G 00391 44A							
) ORM 11	A WUC Next Node 59 Probability . Clock No.	9 10 11 12 13 14 13 16 13 16 17 18 19 20 21 22 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38	GO 044AGO ID4AGO D 44AO	44A60 H H 44A0	00 L44AHO ID4AHO G 00341 44A0	HO WI44AHO E 44AOC	HO N44AHO E A4AOC	0 Q44AH0 44A0	44 A O O H H A A A A O	00 L44A00 6 00391 44A							
EXTENDING CONTRACTOR OF CONTRA	. 2 FORM 11	A WUC Next Node 59 Probability . Clock No.	9 10 11 12 13 14 13 16 13 16 17 18 19 20 21 22 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38	AGO 044 AGO ID4AGO D 44 AO	44A60 H H 44A0	AOO 449AHO ID4AHO 6 00341 44AO	AHO W44AHO 44AOC	AHO N44AHO E A4AOC	AHO Q44AHO 44AO	44 A O O H	ADO L44ADO 6 00391 44A							
NA NA NA NA NA NA NA NA NA NA NA NA NA N	No. 2 (D FORM 11	A WUC Next Node 59 Probability . Clock No.	9 10 11 12 13 14 13 16 13 16 17 18 19 20 21 22 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38	AGO 044 AGO ID4AGO D 44 AO	44A60 H H 44A0	4 A O O L 4 4 A H O I D 4 A H O G 0 0 3 4 1 4 4 A O	4 AHO W44AHO E A4AOC	4AHO N4AAHO FE AAAOC	4AHO Q44AHO 44AO	44 A O O H	4A00 L14AA00 6 003911 44A							WITH STOCK IS BENUSTED.
Z X	r No. 2 IDED FORM 11	rior Node A WUC Next Node 6 Probability Clock No.	6 7 8 9 10 11 12 13 14 13 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38	DAAGO BAAAGO IDAAGO D 44AO	44A60 H H 44A0	DAAROO LAARHO IDAARO G 003411 44 AO	D4AHO W44AHO E 64ADO	D4AHO N44AHO E A4AOC	D4AHO Q4AHO 44AO	44 A O O H	D4A00 L44A00 6 003911 44A							
	UT No. 2 ENDED FORM 11	Prior Node A Probability . Clock No.	5 & 7 & 9 10 11 12 13 14 13 14 17 18 19 20 21 22 23 24 25 26 27 28 29 20 31 32 33 34 35 36 37 38	DAAGO BAAAGO IDAAGO D 44AO	44A60 H H 44A0	DAAROO LAARHO IDAARO G 003411 44 AO	D4AHO W44AHO E 64ADO	D4AHO N44AHO E A4AOC	D4AHO Q4AHO 44AO	44 A O O H	D4A00 L44A00 6 00391 44A						PROVINCE FOR THE COLUMN TO LEAST	UNTIL STOCK IE EXMUSITED.
	NPUT No. 2 KTENDED FORM 11	Prior Node A WUC Next Node 9 Probability . Clock No.	4 5 6 7 8 9 10 11 12 13 14 13 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38	DAAGO BAAAGO IDAAGO D 44AO	44A60 H H 44A0	DAAROO LAARHO IDAARO G 003411 44 AO	D4AHO W44AHO E 64ADO	D4AHO N44AHO E A4AOC	D4AHO Q4AHO 44AO	44 A O O H	D4A00 L44A00 6 00391 44A						PROVINCE FOR THE COLUMN TO LEAST	UNTIL STOCK IE EXMUSITED.
	INPUT No. 2 Extended form 11	Prior Node A WUC Next Node 9 Probability . Clock No.	3 4 5 6 7 8 9 10 11 12 13 14 13 16 13 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38	DAAGO BAAAGO IDAAGO D 44AO	44A60 H H 44A0	DAAROO LAARHO IDAARO G 003411 44 AO	D4AHO W44AHO E 64ADO	D4AHO N44AHO E A4AOC	D4AHO Q4AHO 44AO	44 A O O H	D4A00 L44A00 6 00391 44A						PROVINCE FOR THE COLUMN TO LEAST	UNTIL STOCK IE EXMUSITED.
70	INPUT No. 2 EXTENDED FORM 11	Prior Node A WUC Next Node 9 Probability . Clock No.	3 4 5 6 7 8 9 10 11 12 13 14 13 16 13 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38	DAAGO BAAAGO IDAAGO D 44AO	44A60 H H 44A0	DAAROO LAARHO IDAARO G 003411 44 AO	D4AHO W44AHO E 64ADO	D4AHO N44AHO E A4AOC	D4AHO Q4AHO 44AO	44 A O O H	D4A00 L44A00 6 00391 44A						PROVINCE FOR THE COLUMN TO LEAST	

Figure 24. External lighting network coding (continued).

.5 Hours x
$$\left(\frac{38 \text{ reported V Actions}}{219 \text{ Total R + M Actions}}\right) = .1 \text{ Hours}$$

The average troubleshoot time over all corrective actions on the subsystem is .7 hours. These times computed from the data bank runs are only the initial cut at networking. They should be factored for any significant design differences and verified by experienced maintenance specialists.

Engine Network

.67466


MDC data is of relatively little value in developing a network for a basic engine. Data bank print-outs are available to show engine work on aircraft, work on entire engines in the engine shop, shop work on components removed from the engine, special inspections, and removals for access. However, so much of the unscheduled maintenance is reported against 04 inspection codes and even 09 shop general that the data bank probabilities often are not meaningful.

It may not be feasible to determine the frequency of engine removals from MDC data since there is no standard way of reporting an engine removal for failure. For example, on the A7D work unit codes 23B, 23AJ, and removal for access (to the internal parts) are variously used. The AFLC depot engine managers require separate reporting of each engine removal for cause, and these are listed in the monthly base K-18 maintenance summary. The average K-18 count over the past year from bases of interest may be the best estimate of mean removal rate for a comparable engine.

The engine removal task sequence through functional check flight, and the proportion of on-aircraft troubleshoot-adjust-fix to removal, should be based on information obtained from the engine shops maintaining comparable engines, and modified for the maintenance concept and requirements of the new engine.

An example engine network is shown in Figure 25. When an engine is changed, the aircraft is towed to the test cell for trim and runup, and then taken up for a functional check flight. The engine goes into the shop for teardown. Portions of the engine may be removed and replaced, and the engine reassembled for use as a spare on the next aircraft requiring and engine change. The parts that were removed from the engine are processed through the field shops, and when repaired are returned to stock.

Engine network coding is shown in Figure 26. The example only depicts one of the engine sections in the shop to illustrate the technique. The first asterisk is on the engine teardown task. This tells the computer it is now working on an engine (WUC 23000) and no longer holds up the aircraft. A Q task draws the replacement engine from spare stocks if available. At the next stage the Q task draws an assembly to be replaced on the engine. The asterisk at this level tells the computer that the work is on the removed assembly and does not hold up the engine.

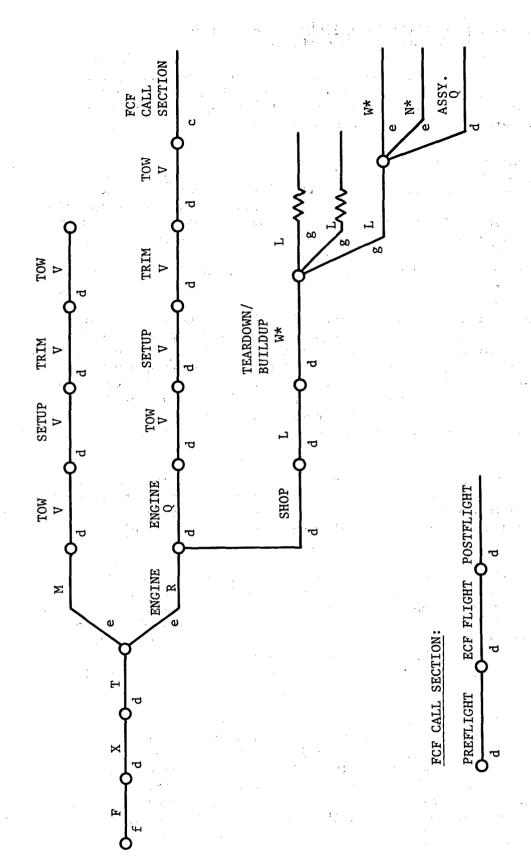

htp://

Figure 25. Schematic of engine network.

	₹	+	+	+	_	4	┼	┼		 	╄	╀	4-	┿┈	4-	-1
	₹ ;	4		₩	↓	┼	╀	╃—	-	 	╄	↓_	↓	┩	↓_	_
	4	Ц		↓_	╀	┸	<u> </u>	1	1			1	1			
		31	1	1	1	.i			1_		1				T	AFLC-WPAFB-JAN 74 500
	<u></u>	1	1	Т	\Box		7	ıT''''	T	_	-	1	1	Σ	4	ਜ ₹
	AFSC / AGE	ž T	1	†	1	1			+	1-	×	.	┅	12	+	≆ ا−
	N AFSC / AG	;}	+	+	+-	+	EL	 -	+-	┼	+~	Ή	ਦ	뇞	+	?
	دان		+	╀—	┼	₩-			╃	├	1.3	;↓	12	45	4	-1 ₹
i	٤,	<u> </u>	_		ļ		اوا	1			3	<u>'L</u>	13	<u> </u>	<u> </u>	
	<u> </u>	<u>:</u>	۰.ــــــــــــــــــــــــــــــــــــ	1_	l		1		Ι.		4	·	TF	•1	7	٦ ģ.
	2 8		T				Z			_	R	1	13	10	+-	ヿ゙゙゙゙゙゙゙゙
	18	_	_	+-	 	┼	Н		+		 ``	+	┰	+=		┥
	ı İş	+	+	-	0	ठ		┿	┼	├	 ~	-	1_	12	۰.	4
9	- 3	-	 	<u> </u>			L_	<u> </u>	J		2	X	1 =	2	0	_
	313	<u> </u>	<u> </u>	×	×	×	-	1		×	F	ں	×	: 3	×	:1
	4 55 % 57 E			-	1	N		ড	E		K	BA		Q	7	7
į	ă E	1	1	M	M	M	4	_	H	M	-	100	6		m	
	APSC / AG	├	1-		_			1~	व्य		43	-	1	u	100	4
	-10	-	╄	7	7	4	ئيا	-	15	4		٠.	4	- 4		1
	Z	Ш		W	M	K	-	_		9	3	F	5	ড	7	٠,
	52 Z	~	<u></u>			1	F					Щ		Z		7
egyl . fai	a =	I	7	7		7	A	7	A	7	7	4		1	7	7
		ড	0	6	3	6	R		Z		6	à	1 🖚	主	는	†
	49 30		R	R	R	- 3	S	57		62	2	<u> </u>	29	+=	6	4
~ 5	45	Z	12	177	114	a	2	14	A	7	त	ਹ	$oldsymbol{\mathcal{L}}$	v	7	J
	-₹	E				Ll	8	L	لـــا		آسيا	œ	L^{-}		L	.1
	47			0	4	3	H	6	a	7	S	H	6	W	200	7
		<u>ಎ</u>		و	K		¥	ठ	3	Ö	7	4	8	Z	4	1
HOURS	77	H	_	⊢=				 	-~			-	⊢ ≃		12	+
3	H					Ļļ	_	-					L	H		12
ΞĚ		5	L				8		N			ØW		9	L	CARD TRANSCRIPT
	13	⋖	_]		Ø	,	n	-		8		2		าธ
	Q	BA							X			F		W	-	13
Tiotity	Ę	_	_	-		_		=					=		-	- 1≥
Ispi edy				7	-				- 7			-		_	-	1-
			Z	7	7	त		7	7		त्र		7		77	12
espeles			1		السنا				. 1							13
	3.6	0	0	0	0	0	0	0	0	O	0	0	Ö	0	7	1=
		0	0	0	5	0	0	0	0			$\stackrel{\sim}{\sim}$			-	łō
ي ي	-	8	~~	80	80	兴	\approx	8	8	80	8	80	Bo	Boo	BOO	PUNCH
NCLOK Glock a	34 35 36	-	- :	<u> </u>		8	æ	-87		9		18	2	8	3	<u> </u>
NCLO	Ē	3	וניז	(7)	וכיז	വ	3	3	3	3	3	3	m	m	3	1
Z Ü																
	191	K	23B	23	K	N	K	त	R	R	R	त	ĸ	K	त	1
	8	Z	N	u	23	K	K		त्य		a	R	23	23	23	1
	2	u		n	K	7	Z		R		7	ñ	ŭ	ĸ		
	33	K	90	7	K	8	7		R		7	n	Z	×	<u>ہ</u>	
	33	и		u	κ	7	K		R		7	n	2	8		
	30 31 32 33	K	90	n	ベ	8	K		R		n	Ä	7	7		
	30 31 32 33	K	90	n	K	8	K		R		n	מ	7	×		
	30 31 32 33	- R	90	7	κ	8	α		R		7	7		×		
	30 31 32 33	<u> </u>	90	7	κ	8	α		R		7	ñ	2	7		
MSBF or	27 28 29 30 31 32 33	- X	7.8			90	<i>κ</i>	7	7			ñ		7	0	
	26 27 28 29 30 31 32 33		90	מ	<u>م</u>	8			χ Δ		2	7	ם			
MSBF or	25 26 27 28 29 30 31 32 33	7 	7.8	Ω	Q	90 2	7	7	Z D		А	Z Z		Н 2	0	
MSe or	24 25 26 27 28 29 30 31 32 33		1 F 28	2 D	Q	90 2		ر م م	6 D		7 D	7			2 E	
MSe or	24 25 26 27 28 29 30 31 32 33		1 F 28	02 D	Q	04 E 90 Z		7	2 06 D		07 D	7			2 E	
MSe or	24 25 26 27 28 29 30 31 32 33		1 F 28	02 D	Q	04 E 90 Z		0 S D	2 06 D		07 D	7			2 E	
MSe or	24 25 26 27 28 29 30 31 32 33		BO 1 F 28	802 D	B03 D	B04 E 90 Z		805 D	Bot D		07 D	7			2 E	
MSe or	24 25 26 27 28 29 30 31 32 33		BO 1 F 28	802 D	B03 D	3B04 E 90 Z		805 D	Bot D		07 D	7			3 BO8 E 10	
MSBF or	24 25 26 27 28 29 30 31 32 33		1 F 28	02 D	Q	B04 E 90 Z		0 S D	2 06 D		7 D	7			2 E	
MSe or	19 20 21 22 23 24 25 24 27 28 29 30 31 32 33		BO 1 F 28	802 D	B03 D	3B04 E 90 Z		805 D	Bot D		07 D	7			3 BO8 E 10	
MSe or	18 19 20 21 22 22 24 25 26 27 28 29 30 31 32 33		BO 1 F 28	802 D	B03 D	3B04 E 90 Z		805 D	Bot D		07 D	7			3 BO8 E 10	
MSe or	18 19 20 21 22 22 24 25 26 27 28 29 30 31 32 33		B3B011 F 28	B3802 D	83.803 D	B3B04 E 90 Z		D B3B0S D	Bot D		83807 D	7	Q		B3B08 E 10	
Next Node	18 19 20 21 22 22 24 25 26 27 28 29 30 31 32 33		0 B3B01 F 28	0 B3802 D	D B3B03 D	0 83804 6 90 2		D B3B0S D	1 B3 B06 D		2 B3B07 D	7	Q		B3B08 E 10	os:
Nost Node	16 17 18 19 20 21 22 29 24 25 26 27 28 29 30 31 32 33		00 B3B01 F 28	0 0 B3802 D	00 B3B03 D	00 B3B04 E 90 Z		00 B3B05 D	01 B3B06 D		02 B3B07 D	7	03		00 B3B08 E 10	dasn a
Nost Node	16 17 18 19 20 21 22 29 24 25 26 27 28 29 30 31 32 33		BOO B3B01 F 28	800 B3802 D	800 B3803 D	800 B3804 E 90 Z		00 B3B05 D	801 B3B06 D		802 83807 D	7	03		00 B3B08 E 10	
Nost Node	16 17 18 19 20 21 22 29 24 25 26 27 28 29 30 31 32 33		BOO B3B01 F 28	800 B3802 D	3800 83803 D	800 B3804 E 90 Z		00 B3B05 D	801 B3B06 D		802 83807 D	7	03		00 B3B08 E 10	
Nost Node	16 17 18 19 20 21 22 29 24 25 26 27 28 29 30 31 32 33		3800 B3801 F 28	3800 B3802 D	3800 83803 D	800 B3804 E 90 Z		3800 B3805 D	801 B3B06 D		802 83807 D	7	23603		00 B3B08 E 10	
Nost Node	16 17 18 19 20 21 22 29 24 25 26 27 28 29 30 31 32 33		23800 B3801 F 28	23800 B3802 D	3800 83803 D	23800 B3804 E 90 Z		23800 B3805 D	23 BO 1 B3 BO 6 D 2		23802 B3807 D	7	23603		00 B3B08 E 10	
Nost Node	12 13 14 15 16 17 18 19 20 21 22 22 24 25 26 27 28 29 30 31 32 33		3800 B3801 F 28	3800 B3802 D	800 B3803 D	800 B3804 E 90 Z		3800 B3805 D	801 B3B06 D		802 83807 D	7	03		00 B3B08 E 10	
Nost Node	12 13 14 15 16 17 18 19 20 21 22 22 24 25 26 27 28 29 30 31 32 33		F23800 83801 F 28	23800 B3802 D	723800 83803 D	M23800 B3804 E 90 Z		23800 B3805 D	V23@01 B3B06 D		23802 B3807 D	7	23603		00 B3B08 E 10	
W C Most Node	12 13 14 15 16 17 18 19 20 21 22 22 24 25 26 27 28 29 30 31 32 33		23800 B3801 F 28	23800 B3802 D	723800 83803 D	3 MZ3800 B3804 E 90 Z		4 V23800 B3805 D	23 BO 1 B3 BO 6 D 2		23802 B3807 D	7	7 V23 B 03 D D		00 B3B08 E 10	
W C Most Node	12 13 14 15 16 17 18 19 20 21 22 22 24 25 26 27 28 29 30 31 32 33		0 FZ3800 B3801 F 28	1 XZ3800 B3802 D	723800 83803 D	3 MZ3800 B3804 E 90 Z		4 V23800 B3805 D	S V23 BOIL B3 BOL D		6 V23B02 B3B07 D	7	7 V23 B 03 D D		00 B3B08 E 10	
W C Most Node	12 13 14 15 16 17 18 19 20 21 22 22 24 25 26 27 28 29 30 31 32 33		00 FZ3800 83801 F 28	01 XX3800 B3802 D	02 723800 83803 D	03 M23800 B3804 E 90 Z		4 V23800 B3805 D	05 V23@01 B3B06 D		06 V23802 B3807 D	7	07 V23803 D		00 B3B08 E 10	
W C Most Node	12 13 14 15 16 17 18 19 20 21 22 22 24 25 26 27 28 29 30 31 32 33		800 FZ3800 83801 F 28	801 X23800 B3802 D	BOZ 723800 83803 D	803 M23800 B3804 E 90 Z		804 V23800 B3805 D	805 V23601 B3B06 D		806 V23802 B3807 D	7	807 V23803 D D		00 B3B08 E 10	
W C Most Node	12 13 14 15 16 17 18 19 20 21 22 22 24 25 26 27 28 29 30 31 32 33		3800 FX3800 B3801 F 28	3801 XZ3800 B3802 D	3802 723800 83803 D	3803 M23800 B3804 E 90 Z		3804 V23800 B3805 D	3805 V23601 B3806 D		3806 V23802 B3807 D	7 7	3807 V23803 D	Н	38/03 R 23 8/0 B 3 80 8 E 1/0	
Nost Node	16 17 18 19 20 21 22 29 24 25 26 27 28 29 30 31 32 33		800 FZ3800 83801 F 28	801 X23800 B3802 D	BOZ 723800 83803 D	803 M23800 B3804 E 90 Z		804 V23800 B3805 D	805 V23601 B3B06 D		806 V23802 B3807 D	7 7	807 V23803 D D	Н	00 B3B08 E 10	PRIVILE EPROPAS OF THIS FORM WILL BE USED UNTIL STOCK IS EPRIVILED.

S Continuetion

/ AGE 70 73

Prior Node

1 2 3

INPUT No. 2 Extended form

-(學語)

Engine network coding, Figure 26.

		<u>noiteunite</u>	97	ब्रा	\top	7	Т	\top	\top	Т	7	$\overline{}$	Т-	T-	7	┰		•
1		noitevnito	+	<u>:</u>	+	十	+-	+-	+-	+-	+	+-	+-	+-	┿	+	+-	4
1			3	- 1	+	+	1-	+	+-	+-	+-	╁	+-	+-	╫	╅╾	┿	┪
J			3		+	1	_	_	+-	+-	+	+	╁	+	+-	┿╌	┯	┥
1			19 60 61 62 63 64 65 66 67 65 65 65 65 65 65 65 65 65 65 65 65 65	•	+	1-	1-	\top	┪┈	+-	+-	+	+-	┰	╁	+-	+-	4
1			3	:	+	+	_	_	1-	+-	+	+	+-	╅	+-	+-	+-	┥.
			zi.	1	+-	1.	_	+-		+	+	+	+-	十	+	┿	+	-
ł .			٦:	:		7	7	1	_	\top	1	†	+-	1-	┿	+-	╅	┥ .
l				1	\top	1	\top	┪	+-	1	+	+	+	+-	┿	+-	+-	4
1			8	-1	+	+	+	+-	+-	╁	+-	┿	┿┈	+	+	+	+-	-1
1			S	<u> </u>	+-	+-		+-	+-	+	+	+	+	+-	┰	+-	+-	-1
1			X is		1	\top		+	+-	1-	10	:1	4	:—	+	+-	+	-1
l			₹ ;		+	+-	+	1	1-	1-	84	1	<u>a</u>	1	+	+-	+	1
1			N APSC / AGE		_	1	+-	+-	_	1	1=		-	1	+	+-	+-	┪
1			1	1	\top	1-	\top	\top	T	1-	+-		1	1	+	+	+	┪ ::
1			3		1	1	 	1	1	-	┿	_	_	1	+	+-	╅	AFLC-WPAFB-JAN 74 500
1			AF5C / AGE	1	1		1	\top	F	Т	1	×			Ta.	.†-	+	٦ ۽
l								\top	=		10		0	1	15	1	+-	┧ ┋
j	-		Ĭ		T	T	T	T	3	1 -	- 2	3	07		A		1	7 🐔
l			4						TH		90	4	A	1	1 4	1	1	7 3
[2 8					\Box	1		1	R	-		F		_	7 *
			2		\bot				L		I				T 7	Т		7
			3	<u> </u>	二	工						×			20		10	2]
l			1	<u> </u>			ـَـــــــــــــــــــــــــــــــــــــ	\perp	צ	匚	×	5	×		1	₹_		
1) 3	↓_		厂			J	匚					2		14	IJ
			34 55 54 57 52	<u> </u>		L			H		m	_	W		3	T	M	
			13	<u> </u>		Щ	1_		૩		4		4		10	_	24328]
l		2	32 33	⊢-	1-	Ļ		<u>.</u>	اع		N		त		ARDØ	1.5	14	7
		edyl .faid	15	-	+				-	L	<u> </u>	_	<u> </u>	<u> </u>	إعا		1	1
ŀ		-4 4410		 -	\vdash	+-	 	 -	AL	ļ	12	7	76		≥ب	 	767	1
		* \$	44 49 50		+	+-	+	+-	1		29	6	29		TE	 - -	12	1
		* \$	+	-	+-	+-	+	+-	IBN	-	124	7	— "	 	 □	١÷	12	1
			2	├	┼	┼	┼─	┼	-3	ــــــ	300	9	2	-	W	-	ᡰᢐ	4
		:	1	-	┼─	┼─	+	+			-=	- 1	7	,	Z	-	8	┨
		HOURS	1	 	╁	╁	╁	┼─		—	-	_	-11	·	H	 	+	1
		ត្ត ទ		-	-	┼─	┼		1		┝╌┤		<u> </u>		굯	-	╂	重
•		= 5	43 44 45 46	_	_	 	_	<u> </u>	=						N		+	١ĕ
				_		 	<u> </u>	 	FUNC		-	-	_		E		+	∤ ⋛
		Ytisoir	41 42	1			_	_				-		_		3	3	≅
		Type Task	8	R	N	R	3	त		2	R	त	N	7		7	N	le.
		espeled			_	L											*	3
			36	0	٥	0	0	٥	0	O	0	٥	٥	0	0	٥	*	3
			36	0	000	000	00 0	0	0	0	0 0		00		00	0	*	UNCH CA
			36	0	3800	3B00	3800	3300	3800	0	800		880 o	Bo	30	800	8008	PUNCH CARD TRANSCRIPT
			36	0	380	(m)	23800	330	380	380	380		380	Bo	30	23800	43 B0 0米	PUNCH CAI
		NCLOK Clock No.	36	23800	23800	23 Boo	23800	23300	23800	0	23800	23B0 0	23800		23800	23800	23B00*	PUNCH CAI
			33 34 35 36 37 38	0	380	(m)	23800	330	380	380	380		380	Bo	30	23800	23800米	PUNCH CA
		NCIOK Clock No.	33 34 35 36 37 38	0	380	(m)	23800	330	380	380	380		380	Bo	30	23800	23800米	PUNCH CA
		NCIOK Clock No.	33 34 35 36 37 38	0	380	(m)	23800	330	380	380	380		380	Bo	30	23800	23800米	PUNCH CA
		or MCIOK bility . Clock No.	33 34 35 36 37 38	0	380	(m)	23800	330	380	380	380		380	Bo	30	23800	23800米	PUNCH CA
		ASBF or NCLOX Obsility . Clock No.	26 29 30 31 32 33 34 35 36 37 38	0	380	(m)	23800	330	380	380	380		380	Bo	30	23800	23800米	PUNCH CA
		MSBF or NCLOX Probability . Clock No.	27 28 29 30 31 32 33 34 35 36 37 38	7380	7380	52	7	2380	380	2380	2380	2380	2380	2380	30		23	PUNCH CAI
		ASBF or NCLOX Obsility . Clock No.	26 27 28 29 30 31 32 33 34 35 36 37 38	0	380	(m)	D 23800	330	7380	380	380		380	Bo	7380	D 23800	D 23B00*	PUNCH CA
		MSBF or NCLOX Probability . Clock No.	25 26 27 26 29 30 31 32 33 34 35 36 37 36	D	D 2380	52	D 2	D 2380	380	C 2380	7380	D 2380	2380	D 2380	30	<u> </u>	23	PUNCH CAR
		Model Model	24 25 26 27 28 27 30 31 32 33 34 33 36 37 38	D	0 0 2380	1 0 1 23	7	2380	7380	2380	2380	2380	2380	0 D 23B0	7380	<u>A</u>	1 D 23	PUNCH CAR
		Model Model	24 25 26 27 28 27 30 31 32 33 34 33 36 37 38	D	10 0	111 0 111	12 D	13 D 2330	7380	14 C 23B0	15 D 2380	16 D 2380	2380	23B0	7380	0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	01 0 23	PUNCH CAR
		Model Model	24 25 26 27 28 27 30 31 32 33 34 33 36 37 38	B09 D 23B0	B10 D 23B0	B11 0 1 23	B12 D	B13 D 2330	7380	8/4 C 23B0	B15 D 2380	B16 D 2380	2380	23B0	7380	Boo D	01 0 23	PUNCH CAR
		Model Model	24 25 26 27 28 27 30 31 32 33 34 33 36 37 38	B09 D 23B0	3810 D 2380	B11 0 1 23	B12 D	B13 D 2330	7380	8/4 C 23B0	3815 D 2380	3816 D Z3B0	2380	23B0	7380	3 Bo o D	01 0 23	PUNCH CAF
		Model Model	24 25 26 27 28 27 30 31 32 33 34 33 36 37 38	D	B10 D 23B0	111 0 111	12 D	13 D 2330	7380	14 C 23B0	B15 D 2380	B16 D 2380	2380	83800 D 2380	7380	BSBOO D	83B01 D 23	PUNCH CAR
		Model Model	24 25 26 27 28 27 30 31 32 33 34 33 36 37 38	B09 D 23B0	3810 D 2380	B11 0 1 23	B12 D	B13 D 2330	7380	8/4 C 23B0	3815 D 2380	3816 D Z3B0	2380	23B0	7380	3 Bo o D	01 0 23	PUNCH CAI
		MSBF or NCIOK	16 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 33 36 37 38	B3B09 D 23B0	B3B10 D 23B0	B11 0 1 23	83B12 D	B3B13 D 23B0	7380	B3B14 C 23B0	3815 D 2380	83816 D 2380	D 2380	83800 D 2380	7380	TB3B00 D	र्ग माध्रुअक्षणा कि	
		MSBF or NCIOK	16 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 33 36 37 38	0 B3B09 D 23B0	00 B3B10 D 23B0	1 83811 0 23	02 83B12 D	B3B13 D 23B0	7380	7 B3B14 C 23B0	T 83815 D 2380	0 B3B16 D Z3B0	FL D Z380	583800 D 2380	0 0 H Z3B0	O IBBBBOO D	र्ग माध्रुअक्षण जि	
		MSBF or NCIOK	16 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 33 36 37 38	800 B3B09 D 123B0	00 B3B10 D 23B0	1 83811 0 23	802 83B12 D	B 03 B 3 B 13 D 2380	7380	B3B14 C 23B0	3815 D 2380	83816 D 2380	7FL D Z3B0	P 583800 D 2380	0 0 H Z3B0	00 TB3B00 D	र्ग माध्रुअक्षण जि	
		MSBF or NCIOK	16 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 33 36 37 38	800 B3B09 D 123B0	00 B3B10 D 23B0	1 83811 0 23	3802 83B12 D	B 03 B 3 B 13 D 2380	7380	57 B3B14 C 23B0	F1T 83815 D 2380	FDO B3B16 D Z3B0	7FL D Z3B0	P 583800 D 2380	300 H Z3B0	Boo IBBBOO D	र्ग माध्रुअक्षण जि	
		MSBF or NCIOK	16 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 33 36 37 38	23800 B3809 D 2380	23800 B3810 D 2380	23B01 B3B11 D 23	23802 83B12 D	23803 B3813 D 2380	7380	ALLS7 B3B14 C . 23B0	PRFLT B3B15 D 2380	FCFD 0 83816 D 2380	7FL D Z3B0	P 583800 D 2380	0 0 H Z3B0	00 TB3B00 D	र्ग माध्रुअक्षण जि	
		A W UC Next Node	12 13 14 15 16 17 16 19 20 21 22 22 24 25 26 27 26 27 30 31 32 33 34 35 36 37 36	0 B3B09 D 23B0	00 B3B10 D 23B0	3801 B3B11 D	3802 83B12 D	3803 B3813 D 2380	7380	1157 B3B14 C 23B0	RF1T B3B15 D 2380	FCFD 0 83816 D 2380	7FL D Z3B0	583800 D 2380	300 H Z3B0	3800 TB3800 D	र्ग माध्रुअक्षण जि	
		A W UC Next Node	12 13 14 15 16 17 16 19 20 21 22 22 24 25 26 27 26 27 30 31 32 33 34 35 36 37 36	Q23800 B3809 D 2380	V23800 B3810 D 2380	V23B01 B3B11 D 23	23802 83B12 D	V23B03 B3B13 D 23B0	Н 7380	CA1157 B3B14 C 23B0	VPRFLT B3B15 D Z380	VFCFD0 B3B16 D 23B0	VPSTFL D Z3Bo	SHIPP SB3B00 D 23B0	300 H Z3B0	123800 TB3800 D	र्ग माध्रुअक्षण जि	
		A W UC Next Node	12 13 14 15 16 17 16 19 20 21 22 22 24 25 26 27 26 27 30 31 32 33 34 35 36 37 36	8 QZ3800 B3809 D 2380	9 V23800 B3810 D 2380	0 V23B011 B3B11 D	1 V23802 83812 D	2 V23B03 B3B13 D 23B0	Н 7380	ALLS7 B3B14 C . 23B0	7 VPRF1T B3B15 D 2380	VFCFD0 B3B16 D 23B0	6 VPSTFL D Z3B0	4 SHØP SB3B00 D 23B0	300 H Z3B0	0 LZ3800 TB3800 D	र्ग माध्रुअक्षण जि	
		A W UC Next Node	12 13 14 15 16 17 16 19 20 21 22 22 24 25 26 27 26 27 30 31 32 33 34 35 36 37 36	08 QZ3800 B3B09 D Z3B0	09 V23B00 B3B10 D 23B0	10 V23801 B3B11 D	11 N23802 83B12 D	12 V23B03 B3B13 D 23B0	H 7380	13 CALLS7 B3B14 C 23B0	ST VPRFLT B3B15 D Z380	15 VFCF00 B3B16 D 23B0	16 VPSTFL D Z3BO	14 SHIPP SB3B00 D 23B0	300 H Z3B0	0 LZ3800 TB3800 D	र्ग माध्रुअक्षण जि	
8		A W UC Next Node	12 13 14 15 16 17 16 19 20 21 22 22 24 25 26 27 26 27 30 31 32 33 34 35 36 37 36	808 Q23800 B3809 D 2380	809 V23800 B3810 D 2380	B10 V23B01 B3B11 D	811 V23802 83B12 D	B12 V23B03 B3B13 D 23B0	H 7380	13 CALLS7 B3B14 C 23B0	LST VPRFLT B3B15 D Z3B0	815 VFCFD0 B3B16 D Z3B0	BILL VPSTFL D Z3BO	B/4 SHØP SB3B00 D 23B0	23B00 H Z3B0	800 L23800 IB3800 D	र्ग माध्रुअक्षण जि	
10. 2		A W UC Next Node	12 13 14 15 16 17 16 19 20 21 22 22 24 25 26 27 26 27 30 31 32 33 34 35 36 37 36	808 Q23800 B3809 D 2380	3809 V23800 B3810 D 2380	3810 V23801 83811 D	3811 V23802 83812 D	3812 V23803 B3B13 D 2380	Н 7380	3813 CALLS7 83819 C 2380	1157 VPRF1T B3B15 D 2380	3815 VFCFD0 B3B16 D Z3B0	3816 VPSTFL D Z380	38/4 SHPP SB3800 D 2380	23B00 H Z3B0	800 L23800 IB3800 D	3 BOO WZ3 BOO TB3BOI D 23	TRYDOL BOTH OF THE FORM WILL IN USED UNTIL THE PUNCH CAN
No. 2		A W UC Next Node	12 13 14 15 16 17 16 19 20 21 22 22 24 25 26 27 26 27 30 31 32 33 34 35 36 37 36	08 QZ3800 B3B09 D Z3B0	809 V23800 B3810 D 2380	B10 V23B01 B3B11 D	811 V23802 83B12 D	B12 V23B03 B3B13 D 23B0	Н 7380	13 CALLS7 B3B14 C 23B0	ALLST VPRFLT B3B15 D 2380	3815 VFCF00 B3B16 D Z3B0	3816 VPSTFL D Z380	B/4 SHØP SB3B00 D 23B0	23B00 H Z3B0	800 L23800 IB3800 D	3 BOO WZ3 BOO TB3BOI D 23	
UT No. 2		A W UC Next Node	5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 28 24 25 26 27 26 29 30 31 22 33 34 35 36 37 38	808 Q23800 B3809 D 2380	3809 V23800 B3810 D 2380	3810 V23801 83811 D	3811 V23802 83812 D	3812 V23803 B3B13 D 2380	Н 7380	3813 CALLS7 83819 C 2380	1157 VPRF1T B3B15 D 2380	3815 VFCFD0 B3B16 D Z3B0	3816 VPSTFL D Z380	38/4 SHPP SB3800 D 2380	23B00 H Z3B0	0 LZ3800 TB3800 D	IB3800 W23800 FB3801 D 23	PENOLS ENTORS OF HIS FORM WILL BE USED UNTIL STOCK IS DEMANSTED:
APUT No. 2		A W UC Next Node	3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 25 26 25 26 27 28 29 30 31 32 33 34 35 36 37 38	808 Q23800 B3809 D 2380	3809 V23800 B3810 D 2380	3810 V23801 83811 D	3811 V23802 83812 D	3812 V23803 B3B13 D 2380	Н 7380	3813 CALLS7 83819 C 2380	ALLST VPRFLT B3B15 D 2380	3815 VFCFD0 B3B16 D Z3B0	3816 VPSTFL D Z380	38/4 SHPP SB3800 D 2380	23B00 H Z3B0	800 L23800 IB3800 D	IB3800 W23800 FB3801 D 23	PENOLS ENTORS OF HIS FORM WILL BE USED UNTIL STOCK IS DEMANSTED:
INPUT No. 2	EXTENDED FORM 11	A W UC Next Node	5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 28 24 25 26 27 26 29 30 31 22 33 34 35 36 37 38	808 Q23800 B3809 D 2380	3809 V23800 B3810 D 2380	3810 V23801 83811 D	3811 V23802 83812 D	3812 V23803 B3B13 D 2380	Н 7380	3813 CALLS7 83819 C 2380	ALLST VPRFLT B3B15 D 2380	3815 VFCFD0 B3B16 D Z3B0	3816 VPSTFL D Z380	38/4 SHPP SB3800 D 2380	23B00 H Z3B0	800 L23800 IB3800 D	IB3800 W23800 FB3801 D 23	PENOLS ENTORS OF HIS FORM WILL BE USED UNTIL STOCK IS DEMANSTED:
INPUT No. 2		A W UC Next Node	3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 25 26 25 26 27 28 29 30 31 32 33 34 35 36 37 38	808 Q23800 B3809 D 2380	3809 V23800 B3810 D 2380	3810 V23801 83811 D	3811 V23802 83812 D	3812 V23803 B3B13 D 2380	Н 7380	3813 CALLS7 83819 C 2380	ALLST VPRFLT B3B15 D 2380	3815 VFCFD0 B3B16 D Z3B0	3816 VPSTFL D Z380	38/4 SHPP SB3800 D 2380	23B00 H Z3B0	800 L23800 IB3800 D	I B3 Bolo M23 Bolo I B3 Boli D 23	

Figure 26. Engine network coding (continued),

-3250

Figure 26. Engine network coding (continued),

The engine work center may be subdivided into different sections which do not do each other's work. This is one of the maintenance concept assumptions that must be obtained from the operating command. In Figure 26, the flight line dispatch crew is coded 432XO, technicians assigned exclusively to shop work are coded 4325O, and the crew dedicated to the test cell is coded 432TO. The pilot who does the functional check flight is coded 1115K. He is treated as a dedicated resource and is normally only available during daylight shifts. The functional check flight is coded as a maintenance task rather than as a sortic task because it is not scheduled on a Form 20. Note the use of header cards to supply nomenclature for the string of check tasks following engine change or on-aircraft fix. Also note that resources are not shown for these tasks when they are repeated.

Engine accessories and accessory systems removed and replaced on aircraft are shown in separate networks (engine fuel system, engine electrical system, engine oil system, etc.). These networks can be satisfactorily modeled from MDC data and were not illustrated for this example.

Complex Avionics Networks

3.

The A7D forward looking radar (WUC 73A00) is one of several integrated subsystems comprising the A7D bombing avionics. It is one of the most complex networking problems a model builder is likely to encounter. Some of the troubleshooting and radar boresighting are reported under 04 series work unit codes. Much of the troubleshooting is reported as cannot-duplicate (CND). If the initial troubleshoot does not locate the fault, another specialist will be called in to check his subsystem, until the problem is found or clearly cannot be duplicated. Some corrective actions require multiple removals for access, and some access removals are checked in the shop. When NRTS items return from depot they are given a full bench check, and in some cases may be NRTS back again.

The 3 digit on-aircraft data bank summary output is shown in Figure 27. The FLR is maintained by 322X1 technicians. The few instances of work by other AFSCs total less than 1% of the maintenance actions and can be ignored. Part of the special inspection data bank output is shown in Figure 28. The 04128 and 04129 codes report troubleshooting and/or boresighting of the whole bombing system. Some of these involve work on the FLR. Figure 29 shows the CND troubleshoot matrix for the whole bombing system. The subsystems and special inspection codes are listed on the vertical axis. The first column shows the number of CND troubleshoots reported against these codes in the data sample. The next columns show how many of these CNDs were associated with a corrective action on another of the integrated subsystems. The last column shows how many were true CNDs not associated with any subsequent corrective action. The matrix shows 162 true CNDs for 73A in this data sample.

######################################	1.2 HR 353 M	
AFSC= 322X1 NOM= AV MEAPONS CONTROL AFSC= 322X1 NOM= AV NEAPONS CONTROL AFSC= 322X1	200	A ACTIONS
AFSC= 322X1 NOM= AV WEAPONS CONTROL AFSC= 322X1		
AFSC= 322X1 NOM= AV WEAPONS CONTROL CREW= 1 AFSC= 322X1 NOM= AV WEAPONS CONTROL CREW= 3 AFSC= 322X1 NOM= AV WEAPONS CONTROL CREW= 4 AFSC= 322X1 NOM= AV WEAPONS CONTROL CREW= 4 AFSC= 322X1 NOM= AV WEAPONS CONTROL CREW= 3 AFSC= 322X1 NOM= AV WEAPONS CONTROL CREW= 4 AFSC= 322X1 NOM= AV WEAPONS CONTROL CREW= 4 AFSC= 322X1 NOM= AV WEAPONS CONTROL CREW= 5 FOR HUG 73A *AFSC 322X1,*MEAN M JOB TIME= 1.99, AFSC= 325X1 NOM= AV INSTRUMENTS CREW= 3 AFSC= 325X1 NOM= AV INSTRUMENTS CREW= 3 FOR WUG 73A *AFSC 325X1,*MEAN M JOB TIME 1	a a	1
AFSC= 322X1 NOM= AV WEAPONS CONTROL AFSC= 322X1 NOM= AV WEAPONS CONTROL AFSC= 322X1 NOM= AV WEAPONS CONTROL AFSC= 322X1 NOM= AV WEAPONS CONTROL AFSC= 322X1 NOM= AV WEAPONS CONTROL AFSC= 322X1 NOM= AV WEAPONS CONTROL AFSC= 322X1 NOM= AV WEAPONS CONTROL AFSC= 322X1 NOM= AV WEAPONS CONTROL AFSC= 322X1 NOM= AV WEAPONS CONTROL AFSC= 322X1 NOM= AV WEAPONS CONTROL AFSC= 322X1 NOM= AV WEAPONS CONTROL AFSC= 322X1 NOM= AV WEAPONS CONTROL AFSC= 322X1 NOM= AV WEAPONS CONTROL AFSC= 322X1 NOM= AV WEAPONS CONTROL AFSC= 322X1 NOM= AV WEAPONS CONTROL CREW= 3 AFSC= 325X1 NOM= AV WEAPONS CONTROL CREW= 5 FOR WUC 73A *AFSC 322X1*MEAN M JOB TIME= 1.99, AFSC= 325X1 NOM= AV INSTRUMENTS CREW= 7 FOR WUC 73A *AFSC 325X1*MEAN M JOB TIME= 0.00.	o u	ONOTICE O
AFSC= 322X1 NOM= AV WEAPONS CONTROL AFSC= 322X1 NOM= AV WEAPONS CONTROL AFSC= 322X1 NOM= AV WEAPONS CONTROL AFSC= 322X1 NOM= AV WEAPONS CONTROL AFSC= 322X1 NOM= AV WEAPONS CONTROL AFSC= 322X1 NOM= AV WEAPONS CONTROL AFSC= 322X1 NOM= AV WEAPONS CONTROL AFSC= 322X1 NOM= AV WEAPONS CONTROL AFSC= 322X1 NOM= AV WEAPONS CONTROL AFSC= 322X1 NOM= AV WEAPONS CONTROL AFSC= 322X1 NOM= AV WEAPONS CONTROL AFSC= 322X1 NOM= AV WEAPONS CONTROL AFSC= 322X1 NOM= AV WEAPONS CONTROL AFSC= 322X1 NOM= AV WEAPONS CONTROL AFSC= 322X1 NOM= AV WEAPONS CONTROL AFSC= 322X1 NOM= AV WEAPONS CONTROL AFSC= 322X1 NOM= AV WEAPONS CONTROL AFSC= 325X1 NOM= AV WEAPONS CONTROL AFSC= 325X1 NOM= AV WEAPONS CONTROL AFSC= 325X1 NOM= AV INSTRUMENTS AFSC= 322X1 NOM= AV INSTRUMENTS AFSC= 322X1 NOM= AV INS	HO W 40	
AFSC= 322X1 NOM= AV WEAPONS CONTROL AFSC= 322X1 NCM= AV WEAPONS CONTROL AFSC= 322X1 NOM= AV WEAPONS CONTROL AFSC= 322X1 NOM= AV WEAPONS CONTROL AFSC= 322X1 NOM= AV WEAPONS CONTROL AFSC= 322X1 NOM= AV WEAPONS CONTROL AFSC= 322X1 NOM= AV WEAPONS CONTROL AFSC= 322X1 NOM= AV WEAPONS CONTROL AFSC= 322X1 NOM= AV WEAPONS CONTROL AFSC= 322X1 NOM= AV WEAPONS CONTROL AFSC= 322X1 NOM= AV WEAPONS CONTROL AFSC= 322X1 NOM= AV WEAPONS CONTROL AFSC= 322X1 NOM= AV WEAPONS CONTROL AFSC= 322X1 NOM= AV WEAPONS CONTROL AFSC= 322X1 NOM= AV NEAPONS CONTROL AFSC= 325X1 NOM= AV INSTRUMENTS AFSC= 325X1 NOM= AV INSTRUMENTS AFSC= 325X1 NOM= AV INSTRUMENTS AFSC= 325X1 NOM= AV INSTRUMENTS AFSC= 325X1 NOM= AV INSTRUMENTS AFSC= 325X1 NOM= AV INSTRUMENTS AFSC= 431X1 NCM= OM FLIGHT LINE CREW= 3 AFSC= 431X1 NCM= OM FLIGHT LINE CREW= 3 AFSC= 431X1 NCM= OM FLIGHT LINE CREW= 3 AFSC= 431X1 NCM= OM FLIGHT LINE CREW= 3 AFSC= 431X1 NCM= OM FLIGHT LINE AFSC= 431X1 NCM= AFSC ASAX1 MEAN M JOB TIME= 1 AFSC= 431X1 NCM= AFSC ASAX1 MEAN M JOB TIME= 1 AFSC= 431X1 NCM= AFSC ASAX1 MEAN M JOB TIME= 1	CTO NH 7.	ACTIONS O ACTIONS
AFSC= 322X1 NCM= AV WEAPONS CONTROL CREW= 5 AFSC= 322X1 NOM= AV WEAPONS CONTROL CREW= 1 AFSC= 322X1 NOM= AV WEAPONS CONTROL CREW= 3 AFSC= 322X1 NOM= AV WEAPONS CONTROL CREW= 1 AFSC= 322X1 NOM= AV WEAPONS CONTROL CREW= 1 AFSC= 322X1 NOM= AV WEAPONS CONTROL CREW= 3 AFSC= 322X1 NOM= AV WEAPONS CONTROL CREW= 1.9, AFSC= 322X1 NOM= AV INSTRUMENTS CREW= 3 AFSC= 325X1 MOM= AV INSTRUMENTS CREW= 3 AFSC= 325X1 MOM= AV INSTRUMENTS CREW= 3 AFSC= 431X1 NCM= OM FLIGHT LINE CREW= 3 AFSC= 431X1 NCM= OM FLIGHT LINE CREW= 1	25 PF 7	Ĺ
AFSC= 322X1 NOM= AV WEAPONS CONTROL AFSC= 322X1 NOM= AV WEAPONS CONTROL AFSC= 322X1 NOM= AV WEAPONS CONTROL AFSC= 322X1 NOM= AV WEAPONS CONTROL AFSC= 322X1 NOM= AV WEAPONS CONTROL AFSC= 322X1 NOM= AV WEAPONS CONTROL AFSC= 322X1 NOM= AV WEAPONS CONTROL AFSC= 322X1 NOM= AV WEAPONS CONTROL AFSC= 322X1 NOM= AV WEAPONS CONTROL AFSC= 322X1 NOM= AV WEAPONS CONTROL AFSC= 322X1 NOM= AV WEAPONS CONTROL AFSC= 322X1 NOM= AV INSTRUMENTS AFSC= 325X1 NOM= AV INSTRUMENTS AFSC= 325X1 NOM= AV INSTRUMENTS AFSC= 325X1 NOM= AV INSTRUMENTS AFSC= 431X1 NCM= OM FLIGHT LINE CREW= 3 AFSC= 431X1 NCM= OM FLIGHT LINE CREW= 3 AFSC= 431X1 NCM= OM FLIGHT LINE CREW= 1 AFSC= 431X1 NCM= AV INSTRUMENTS	Y T	
AFSC= 322X1 NCM= AV WEAPONS CONTROL CREW= 3 AFSC= 322X1 NOM= AV WEAPONS CONTROL CREW= 4 AFSC= 322X1 NOM= AV WEAPONS CONTROL CREW= 1 AFSC= 322X1 NOM= AV WEAPONS CONTROL CREW= 3 AFSC= 322X1 NOM= AV WEAPONS CONTROL CREW= 3 AFSC= 322X1 NOM= AV WEAPONS CONTROL CREW= 3 AFSC= 322X1 NOM= AV WEAPONS CONTROL CREW= 5 FOR WUC 73A *AFSC 322X1*MEAN M JOB TIME= 1.99* AFSC= 325X1 NOM= AV INSTRUMENTS CREW= 3 AFSC= 325X1 MEAFSC 325X1 AFSC= 325X1 MEAFSC 325X1	1	1
AFSC= 322X1 NOM= AV WEAPONS CONTROL AFSC= 322X1 NOM= AV WEAPONS CONTROL AFSC= 322X1 NOM= AV WEAPONS CONTROL AFSC= 322X1 NOM= AV WEAPONS CONTROL AFSC= 322X1 NOM= AV WEAPONS CONTROL AFSC= 322X1 NOM= AV WEAPONS CONTROL AFSC= 322X1 NOM= AV WEAPONS CONTROL AFSC= 322X1 NOM= AV WEAPONS CONTROL AFSC= 322X1 NOM= AV INSTRUMENTS AFSC= 325X1 NOM= AV INSTRUMENTS AFSC= 325X1 NOM= AV INSTRUMENTS AFSC= 325X1 NOM= AV INSTRUMENTS AFSC= 325X1 NOM= AV INSTRUMENTS AFSC= 431X1 NCM= OM FLIGHT LINE CREW= 3 CREW= 3 AFSC= 431X1 NCM= OM FLIGHT LINE CREW= 1 AFSC= 431X1 NCM= OM FLIGHT LINE CREW= 1 AFSC= 431X1 NCM= OM FLIGHT LINE CREW= 1 AFSC= 431X1 NCM= OM FLIGHT LINE CREW= 1 AFSC= 431X1 NCM= OM FLIGHT LINE CREW= 1 AFSC= 431X1 NCM= OM FLIGHT LINE CREW= 1 AFSC= 431X1 NCM= OM FLIGHT LINE CREW= 1 AFSC= 431X1 NCM= OM FLIGHT LINE CREW= 1 AFSC= 431X1 NCM= OM FLIGHT LINE CREW= 3 AFSC= 431X1 NCM= OM FLIGHT LINE CREW= 3 AFSC= 431X1 NCM= OM FLIGHT LINE CREW= 3 AFSC= 431X1 NCM= OM FLIGHT LINE CREW= 3 AFSC= 431X1 NCM= OM FLIGHT LINE	HR 70	
AFSC= 322X1 NCM= AV WEAPONS CONTROL CREW= 4 AFSC= 322X1 NOM= AV WEAPONS CONTROL CREW= 1 AFSC= 322X1 NOM= AV WEAPONS CONTROL CREW= 3 AFSC= 322X1 NOM= AV WEAPONS CONTROL CREW= 3 AFSC= 322X1 NOM= AV WEAPONS CONTROL CREW= 5 FOR WUC 73A *AFSC 322X1*MEAN M JOB TIME= 1.99* AFSC= 325X1 NOM= AV INSTRUMENTS CREW= 2 AFSC= 325X1 NOM= AV INSTRUMENTS CREW= 3 AFSC= 325X1 NOM= AV INSTRUMENTS CREW= 3 AFSC= 325X1 MEAN M JOB TIME= 0.0.0	¥	V ACTIONS
AFSC= 322X1 NOM= AV WEAPONS CONTROL AFSC= 322X1 NOM= AV WEAPONS CONTROL AFSC= 322X1 NOM= AV WEAPONS CONTROL AFSC= 322X1 NOM= AV WEAPONS CONTROL AFSC= 322X1 NOM= AV WEAPONS CONTROL AFSC= 322X1 NOM= AV WEAPONS CONTROL AFSC= 325X1 NOM= AV INSTRUMENTS AFSC= 325X1 NOM= AV INSTRUMENTS AFSC= 325X1 NOM= AV INSTRUMENTS AFSC= 325X1 NOM= AV INSTRUMENTS AFSC= 431X1 NCM= OM FLIGHT LINE AFSC= 431X1 NCM= OM FLIGHT LINE AFSC= 431X1 NCM= AN AND TINE AFSC= 431X1 NCM= AN AND TINE	2.3 HR 1 V	VACTIONS
AFSC= 322X1 NOM= AV WEAPONS CONTROL CREW= 2 AFSC= 322X1 NOM= AV WEAPONS CONTROL CREW= 3 AFSC= 322X1 NOM= AV WEAPONS CONTROL CREW= 5 AFSC= 322X1 NOM= AV INSTRUMENTS CREW= 2 AFSC= 325X1 NOM= AV INSTRUMENTS CREW= 3 AFSC= 325X1 NOM= AV INSTRUMENTS CREW= 3 AFSC= 325X1 NOM= AV INSTRUMENTS CREW= 3 AFSC= 431X1 NCM= OM FLIGHT LINE CREW= 1 FOR WIG 73A AFSC ASAX1 AFAN M. NOD TIME	¥	TACTIONS
AFSC= 322X1 NOM= AV WEAPONS CONTROL AFSC= 322X1 NOM= AV WEAPONS CONTROL AFSC= 322X1 NOM= AV WEAPONS CONTROL CREW= 3 AFSC= 325X1 NOM= AV INSTRUMENTS AFSC= 325X1 NOM= AV INSTRUMENTS AFSC= 325X1 NOM= AV INSTRUMENTS AFSC= 431X1 NCM= OM FLIGHT LINE CREW= 3 CREW= 3 CREW= 3 AFSC= 431X1 NCM= OM FLIGHT LINE CREW= 1 CREW= 3 CREW= 3 AFSC= 431X1 NCM= OM FLIGHT LINE CREW= 1 AFSC= 431X1 NCM= OM FLIGHT LINE CREW= 1	1.6 HR 392 T	T ACTIONS
AFSC= 322X1 NOM= AV WEAPONS CONTROL CREW= 4 AFSC= 322X1 NOM= AV WEAPONS CONTROL CREW= 5 FOR WUC 73A *AFSC 322X1*MEAN M JOB TIME= 1.9* AFSC= 325X1 NOM= AV INSTRUMENTS CREW= 3 AFSC= 325X1 NOM= AV INSTRUMENTS CREW= 3 AFSC= 431X1 NCM= OM FLIGHT LINE CREW= 1 FOR WUC 73A *AFSC 431X1 MEST AFSC 431X1 AFSC 431X1	HR	TACTIONS
AFSC= 322X1 NOM= AV WEAPONS CONTROL FOR WUC 73A *AFSC 322X1,MEAN M JOB TIME= 1.9, AFSC= 325X1 NOM= AV INSTRUMENTS AFSC= 325X1 NOM= AV INSTRUMENTS CREW= 3 FOR WUC 73A *AFSC 325X1,MEAN M JOB TIME= 0.0.	H	SWOTI OF I
AFSC= 325X1 NOM= AV INSTRUMENTS AFSC= 325X1 NOM= AV INSTRUMENTS AFSC= 325X1 NOM= AV INSTRUMENTS CREW= 3 CREW= 3 EOR WUC 73A *AFSC 325X1*MEAN_M JOB TIME= 0.0. AFSC= 431X1 NCM= OM FLIGHT LINE FOR WIC 73A *AFSC 431X1 MEAN M JOB TIME= 1	TH HS	:'Z
AFSC= 325X1 NOM= AV INSTRUMENTS AFSC= 325X1 NOM= AV INSTRUMENTS CREW= 3 FOR WUC 73A *AFSC 325X1*MEAN_M JOB TIME= 0.0.0. AFSC= 431X1 NCM= OM FLIGHT LINE FOR WUC 73A *AFSC 431X1 NCM= 1	α	2.9
AFSC= 325X1 NOM= AV INSTRUMENTS CREW= 3 EOR WUG 73A *AFSC 325X1*MEAN M JOB TIME= 0.0. AFSC= 431X1 NCM= OM FLIGHT LINE FOR WUG 73A AFSC 431X1 MEAN M JOB TIME- 1	•	
AFSC= 431X1 NCM= OM FLIGHT LINE AFSC= 431X1 NCM= OM FLIGHT LINE FOR WIG 73A AFSC A31X1 MCD TIME	שא	AC-10N
AFSC= 431X1 NCM= OM FLIGHT LINE FOR WIG 73A AAFSC A31X1 MEAN M 10D TIME 4 1	1.4 HR 1 R HEAN R JOB TIME=	ACTIONS = 1.7
WIIC 73A -AFSC 631X1-MEAN M 100 TIME 4 1	1.4 HR 2 M	
	S JOB TIME	0.0
AFSC= 531X0 NOM= FM MACHINE	2.0 HR 6 M	A ACTIONS
NOM= FM MACHIN	1.8 HR 1 M	
.0.	MEAN R JOB TIME=	

Figure 27. Data bank printout for FLR on-aircraft work.

MPR0B 30 0.00 .00

ELAP 1.25 0.00 1.40 2.00

*PROB .70 .00

* 49 %

R ELAP 2.24 1.73 0.00

AFSC 322X1 325X1 431X1 531X0

MUC= 73A

15 V ACTIONS 354 V ACTIONS 50 V ACTIONS 2 V ACTIONS	25 V ACTIONS 28 V ACTIONS 3 V ACTIONS 1 V ACTIONS	1 V ACTIONS 1 V ACTIONS	>> >>	2 V ACTIONS 10 V ACTIONS 1 V ACTIONS 0 V ACTIONS	- 0 V ACTIONS 1 V ACTIONS 0 V ACTIONS	0 V ACTIONS 86 V ACTIONS 46 V ACTIONS 6 V ACTIONS	2 V ACTIONS 2 V ACTIONS
1.5 HR 1.5 HR 1.6 HR 1.3 HR	1.3 HR 2.1 HR 5 HR 6.0 HR	1.0 HR	41040	.5 HQ .7 HQ 1.0 HR	1.1 HR	1.1 H? 1.6 KR 2.4 HR 2.8 HR	1.4 HR
CREWE 2	OREN# 1 OREN# 1 OREN# 3 OREN# 4	CREAT 2		CREW= 1 CREW= 2 CREW= 3 CREW= 3	CREW= 4 CREW= 4	CREW= 2 CREW= 2 CREW= 3	2 = F320
NOW= 1V TVSTRUMENTS NO 4= AV TVSTRUMENTS NO 4= AV TVSTRUMFNTS VO ×= AV TVSTRUMFNTS	NOM= 3M FLIGHT LING NOM= 3M FLIGHT LING NOM= 3M FLIGHT LING	NO4= 1V INSTRUMENTS NO4=TEAM WORK AFSC GROUP NO4= 1V WFAPONS CONTROL	AV WEAPONS AV WEAPONS AV WEAPONS AV WEAPONS	NOM= AV NOPPLER-INERTIAL NAV NOM= AV NOPPLER-INERTIAL NAV NOM= AV WEAPONS CONTROL	NOW= 1V NOPPLEY-INERTIAL NAV NOW=TEAM WORK AFSC GROUP NOW= 1V WEAPONS CONTROL	NOM= DM FLIGHT LINE NOM= AV WEAPONS CONTROL 10M= AV WEAPONS CONTROL NOM= AV WEAPONS CONTROL	NOM= AV TNSTQUMENTS VOM= AV DOPPLER-INERTIAL NAV
322×1 325×1 325×1 325×1	431X1 431X1 431X1 431X1	325X1 322X15 322X1	32 32 32 32 32	323X4. 323X4 328X4 +322X1	AFSC= +323X4 AFSC=322X1P AFSC= F322X1	F431X1 322X1 322X1 322X1	325×1.
4 4 4 4 0 0 0 0 0 0 0 0 0 1 1 1 1 1	AFSO= AFSO= AFSO= AFSO=	A 75 CO == 0.00 CO CO == 0.00 CO CO == 0.00 CO CO == 0.00 CO CO == 0.00 CO CO == 0.00 CO CO == 0.00 CO CO CO CO CO CO CO CO CO CO CO CO CO	S S S S	A A A A A A A A A A A A A A A A A A A	AFSC= AFSC= AFSC=	A F S O = A F S	A FSOR
MUS=04124 WUS=04124 WUS=04124 WUS=04124	WIIC=04124 WUC=04124 WUC=04124 WUC=04124	WID=04127	1412 1412 1412	400=94123 W10=94128 W10=34123 W10=04128	WIG=04123 WIG=04129 WIG=04129	WIG=04129 WIG=04129 WIG=04129	417:0+129

Figure 28. Data bank printout for bombing system special inspections.

-											
3.0	75	280	226	119	42	152	162	27	102	112	CND OR
2	0	-	m	0	2	2	0	0	2	m	74E00 R OR H
1	80	1.8	6	7	0	6	2	100	3	IV.	73G00 R OR M R
+	6	33	33	28	11	36	18	7	52	23	73F00 R OR M
ю	16	33	28	118	8	25	2.8		_	40	73E00 R OR M
1	11	33	23	5	2	17	21	33	8	6	73000 R OR M
	11	35	30	18	5	20	14	5	11	19	73C00 R 03 M
M	11	25	19	13	6	27	16		18	28	73600 R OR M
4	10	54	9	23	6	94	59	7	15	6.8	73A00 R 7R H
0	3	13	13	9	æ	14	17	+	7	2	72A00 R OR M
745	106	501	383	206	73	302	273	5.4	168	380	# OF JCNS
74E00 -	73G00 -	73F0G -	73E00 -	73000 - 328X4 *	73C00 -	73800 -	73A00 - 322X1 *	72A00 - 328X1 *	04129 - 322X1 *	04128 322X1 +	41YPE=0 *

-

The CND matrix is also used to determine the probabilities that a corrective action on a specific subsystem was preceded by CND trouble-shoots on other parts of the bombing system. This is found by summing CND actions by each AFSC in the column representing corrective actions against the subsystem. The AFSCs have been noted on the vertical axis. The FLR (73A) is found in the third column. Summing from the top, there are 4 prior CNDs by 46240, 87 by 328X4, 218 by 322X1, 9 by 325X1, and 7 by 328X1.

The 162 true CND troubleshoots for the FLR are actions over and above the corrective actions that went into computation of the failure clock. If it is determined that they should be included, the clock must be adjusted. Figure 27 shows a total of 1652 R and M actions.

There were 14,386 sorties in this particular data sample. The revised 73A clock is:

$$\frac{14,386}{(1652+162)}$$
 = 8 MSBMA

The CND is networked in parallel with the 73A troubleshoot, and of course, leads to no further action. The E probabilities on these troubleshoots are simply:

$$E_{73A} = \frac{1652}{(1652 + 162)} = .92$$

$$E_{CND} = \frac{162}{(1652 + 162)}$$

不够设备

The preceding CND on other subsystems that were determined from the matrix do not affect the 73A clock. These are simply additional actions in sequence leading to a networked R or M corrective action on 73A. They are shown before the 73A access task as parallel E probabilities. A dummy represents the probability that no prior CND troubleshoot was done. The probabilities are:

$$E_{328X4} = \frac{87}{(1652 + 162)} = .04$$

$$E_{322X1} = \frac{218}{(1652 + 162)} = .09$$

$$E_{0} = 1.0 - (.04 + .09) = .87$$

These networks are diagramed in Figure 30 and the coding is shown in Figure 31. It is important that prior CNDs be shown in the networks containing the

Figure 30. Schematic of FLR network.

	Continuati	8															
		79															
	N AFSC / AGE N AFSC / AGE	2						1		\dashv						1	
	Š	5	\dashv						_	\neg	\dashv	1					
	AF	2															
	Z	2															
		2								\dashv	-				_	-	l
		-			×											_	İ
	Ž	9			=	1											ĺ
	Ŋ,	ŝ	_		3									:			İ
		3			4												İ
	Z	(0.7	_		_=				-					_	J		8
		93 53	26			-									A		AFLC-WPAF8-JAN 74 500
	9	3	-	1			$\overline{}$					-					NY.
	AFSC / AGE	3	Ø		O	0	0			0	0	0	0		F		ķ
	FSC	[2]	۵.		و	و	9			و	9 A	9 A	7		6 F		*
		19 00	⋖		9	Α	-		_	9	4	=	크		7		AF.L.
	z	99 66	œ			_			-		-	⊣				_	ĺ
			≪ !	_	m	=	4		=	=	-	=			V	1	İ
	9	5	A		×	×	×		×	×	×	×	X		Ē	2X	i
	AFSC / AGE	34 55 56 57 56	Ø		1	~	00		_	N	R	~	7	`	3	2	İ
	FS	32	2		7	ŭ	ŭ		3	32	32	32	32		-	32	
		20	Z		1	23	23		14	7	~	7	K		J	Z	İ
	z	32.5	8	\dashv		•	-,2			-``	``	•			~		İ
	edyl . Isid	2	Š		7	7			7		7	7	7		_	7	
		49 50	7		6	6	9	\Box	6	29	29	29	:9	\Box	_	6	İ
	* ₹	8	٦	\Box	2	R	7		K	~	N	N	7		_;	Z	İ
-		3	RD			m	8		10	- 0	3	6	6	_	ᆛ	7	l
	🙃	46 67	A		20		-		S				•		X	1	İ
	HOURS (Tenths	Ì	Ž	_											œ		-
	5 5	48 44 46	ØRW														8
			6				_							-	Ac		SE SE
	Minim	1 42	ഥ				_	_			_		_	_	_	_	2
	Type Task	40		त	7	R	त	7	7	7	त	7	7	7		~	e
	Release	Š		``		- `			, ,	- 1							PUNCH CARD TRANSCRIPT
		8	0	0	0	0	0	0	0	0	0	0	0	0	0	AOO	₹
	Ko.	37	0	0	0	0	0	0	PO	0	AD	0	٥	Ao	AO	9	5
	NCLOK Clock P	2	3 A	3 A	3 A	3 A	3 A	3A	3	3 A	3	3A	3 A	3/	3/	734	
				67	1.3		-	7	-	d	~	-	-			7	i
	¥ €	3	-			L-1								<u></u>	7		1
	NCLOK Clock No.	20	7	7	7	7	_							[-			1
	`	33	7	7 7		6	4	7		7	00	_	7				
ι	`	33	7							92	80	711	27			02	
ţ	or bility .	33	7			6	4	7		92		121					
ţ	or bility .	33	7			6	4	7		92		116					
V.	MSBF or Probability.	28 29 30 31 32 33	7		4	60	0 4	87		6	0		7			70	
ţ	ASBF or robability.	26 27 28 29 30 31 32 33				6	4	7	D	E 92		E 711		[D			
· ·	MSBF or Probability.	25 26 27 28 29 30 31 32 33	#	F 7	4	E 09	E 04	E 87		6 3	0	E	7		H	E 02	
t.	Mode Asse or Probability	25 26 27 28 29 30 31 32 33			2 D	3 E 09	0 4	87	04 D	S E 9	0	6 E	7			07 E 02	•
t	Mode Asse or Probability	25 26 27 28 29 30 31 32 33		AOI F 7	A 02 D 7	A 0 3 E 09	A 0 3 E 04	A03 E 87	A04	AOS E 9	0	AOG E	7			07 E 02	
t	Mode Asse or Probability	25 26 27 28 29 30 31 32 33		3 A O 1 F 7	3 A 0 2 D 7	3A03 E 09	3A03 E 04	3 A D 3 E 87	3 A 0 4	3AOS E 9	0	AOG E	7	3A 0 0 D		3A 07 E 02	
,	MSBF or Probability.	25 26 27 28 29 30 31 32 33		AOI F 7	A 02 D 7	A 0 3 E 09	A 0 3 E 04	A03 E 87	A04	AOS E 9	0	6 E	7	3A 0 0 D		07 E 02	
ţ	Mode Asse or Probability	25 26 27 28 29 30 31 32 33		3 A O 1 F 7	3 A 0 2 D 7	3A03 E 09	3A03 E 04	3 A D 3 E 87	3 A 0 4	3AOS E 9	0	AOG E	7			3A 07 E 02	
t	Mode Asse or Probability	25 26 27 28 29 30 31 32 33		3 A O 1 F 7	3 A 0 2 D 7	3A03 E 09	4 63A03 E 04	0 63A03 E 87	0 63404	3AOS E 9	c E 0	G3AO6 E	0 E Z	3A 0 0 D		G3A07 E 02	G
	Next Node OF Probability	25 26 27 28 29 30 31 32 33		00 63A01 F 7	00 63A02 D 7	011 G3A03 E 09	4 63A03 E 04	0 63A03 E 87	00 63004	00 G3A05 E 9	0	0 0 G3 406 E	00		Е9 Н Н	G3A07 E 02	GSCD #
•	Next Node OF Probability	25 26 27 28 29 30 31 32 33		Alolo Galalo F 7	Alolo Galaloz D	001 G3A03 E 09	004 63A03 E 04	0000 63A03 E 87	A00 63 404	ADD GADOS E 9	Aoc E o	ADD G3ADG E	00	P	AE9 H H	G3A07 E 02	G3sn 34 TUA
	Mode Asse or Probability	25 26 27 28 29 30 31 32 33		3AOO G3AOI F 7	3A1010 G3A102 D	3001 G3A03 E 09	3004 63A03 E 04	3000 63A03 E 87	3/10/0 63/10/4	3 A 0 0 6 3 A 0 5 E 9	3 A O C	3 A 0 0 63 A 0 6 E	3A00 E Z	MP SG3A00 D	3AE9	G3A07 E 02	GSS 38 TUM MOD
· ·	W UC Next Node	25 26 27 28 29 30 31 32 33		Alolo Galalo F 7	73A00 63A02 D	73001 G3A03 E 09	73004 63A03 E 04	0000 63A03 E 87	73 A O O G3 A 04	ADD GADOS E 9	Aoc E o	ADD G3ADG E	00	HAP SG3AOO D	AE9 H H	G3A07 E 02	THIS COBA WILL BE USED
	Next Node OF Probability	25 26 27 28 29 30 31 32 33		73A00 63A01 F 7	3A1010 G3A102 D	T73001 G3A03 E 09	773004 63A03 E 04	3000 63A03 E 87	X73A00 63A04	3 A 0 0 6 3 A 0 5 E 9	T73AOC E O	R73A00 G3A06 E	M 73A 0 0	SHIPP SE3AOO D H	3AE9	X 73 A E 1 G 3 A 0 7 E 0 2	is of his form wal be used Paulsted.
=	ACT Mode Of Probability	25 26 27 28 29 30 31 32 33		0 F73A00 63A01 F 7	1 A73A00 63A02 D	2 T73001 G3A03 E 09	2 T73004 63A03 E 04	2 773000 63A03 E 87	3 X 73 A O O G 3 A O 4	4 T73A00 63A0S E 9	4 T73AOC E O	S R73A00 G3A06 E	S M 73A 0 0 E Z	6 SHØP SG3A00 D	3AE9	X 73 A E 1 63 A 07 E 02	MICHS OF THIS FORM WILL IE USED IS EDANUSTED.
=	ACT Mode Of Probability	25 26 27 28 29 30 31 32 33		DO F73ADD G3ADI F 7	011 A73A00 63A02 D	02 T73001 G3A03 E 09	02 T73004 63A03 E 04	02 773000 63A03 E 87	03 X 73 A 0 0 6 3 A 0 4	04 T73A00 63A0S E 9	04 T73A0c	OS R73AOO G3AOG E	05 M73A00 E Z	06 SHØP SG3A00 D	3AE9	X 73 A E 1 63 A 07 E 02	INGEDTIONS OF THIS FORM WILL BE USED STOCK IS EXMUNITED.
=	ACT Mode Of Probability	25 26 27 28 29 30 31 32 33		ADO F73ADD 63ADI F 7	A01 A73A100 63A02 D	A02 173001 G3A03 E 09	A 02 173004 63403 E 04	A 02 773000 63A03 E 87	AD3 X73A00 63A04	A04 T73A00 63A0S E 9	A 04 T73 A 0 C E O	AOS R73AOO G3AOG E	A 05 M 73 A 0 0	3 A ON SHIMP SESAOO D	3AE9	X 73 A E 1 63 A 07 E 02	reyolus Editions of this form wall be used fait, stock is demunited.
=	ACT Mode Of Probability	25 26 27 28 29 30 31 32 33		DO F73ADD G3ADI F 7	011 A73A00 63A02 D	02 T73001 G3A03 E 09	02 T73004 63A03 E 04	02 773000 63A03 E 87	03 X 73 A 0 0 6 3 A 0 4	04 T73A00 63A0S E 9	04 T73A0c	OS R73AOO G3AOG E	05 M73A00 E Z	6 SHØP SG3A00 D	3AE9	G3A07 E 02	PREVIOUS EDRICHES OF THIS FORM WILL IE USED UNTIL STOCK IS BEAULUSTED.
=	ACT Mode Of Probability	8 6 7 8 9 10 11 12 13 14 13 16 17 18 19 20 21 22 22 24 24 25 28 29 20 29 30 31 32 32		3ADO F73ADD 63ADI F 7	3 A O 1 A 7 3 A O O 6 3 A O 2 D	3A02 T73001 G3A03 E 09	3 A 0 2 173 0 0 4 6 3 A 0 3 E 0 4	3/10/2 17/3/0/0 6/3/10/3 E 87	3 A D 3 X 73 A D O G 3 A D 4	A04 T73A00 63A0S E 9	A 04 T73 A 0 C E O	AOS R73AOO G3AOG E	A 05 M 73 A 0 0	3 A ON SHIMP SESAOO D	3AE9	X 73 A E 1 63 A 07 E 02	l
=	ACT Mode Of Probability	4 5 6 7 8 9 90 11 12 13 14 15 16 17 18 19 20 21 22 25 24 25 26 27 28 29 30 31 32 33		3ADO F73ADD 63ADI F 7	3 A O 1 A 7 3 A O O 6 3 A O 2 D	3A02 T73001 G3A03 E 09	3 A 0 2 173 0 0 4 6 3 A 0 3 E 0 4	3/10/2 17/3/0/0 6/3/10/3 E 87	3 A D 3 X 73 A D O G 3 A D 4	A04 T73A00 63A0S E 9	A 04 T73 A 0 C E O	AOS R73AOO G3AOG E	A 05 M 73 A 0 0	3 A ON SHIMP SESAOO D	3AE9	X 73 A E 1 63 A 07 E 02	l
	ACT Mode Of Probability	3 4 5 6 7 8 9 90 11 12 13 14 13 16 17 18 19 20 21 22 23 24 25 28 27 28 29 30 31 32 33	T	3ADO F73ADD 63ADI F 7	3 A O 1 A 7 3 A O O 6 3 A O 2 D	3A02 T73001 G3A03 E 09	3 A 0 2 173 0 0 4 6 3 A 0 3 E 0 4	3/10/2 17/3/0/0 6/3/10/3 E 87	3 A D 3 X 73 A D O G 3 A D 4	A04 T73A00 63A0S E 9	A 04 T73 A 0 C E O	AOS R73AOO G3AOG E	A 05 M 73 A 0 0	3 A ON SHIMP SESAOO D	3AE9	X 73 A E 1 63 A 07 E 02	l
=	ACT Mode Of Probability	4 5 6 7 8 9 90 11 12 13 14 15 16 17 18 19 20 21 22 25 24 25 26 27 28 29 30 31 32 33	T	3ADO F73ADD 63ADI F 7	3 A O 1 A 7 3 A O O 6 3 A O 2 D	3A02 T73001 G3A03 E 09	3 A 0 2 173 0 0 4 6 3 A 0 3 E 0 4	3/10/2 17/3/0/0 6/3/10/3 E 87	3 A D 3 X 73 A D O G 3 A D 4	A04 T73A00 63A0S E 9	A 04 T73 A 0 C E O	AOS R73AOO G3AOG E	A 05 M 73 A 0 0	3 A ON SHIMP SESAOO D	3AE9	X 73 A E 1 63 A 07 E 02	AF 1948 1530 Frencious formings on mis roam wal at uses AF 18 49 1530 Units stock is provinging.

Figure 31, Integrated avionics FLR subsystem network.

		_		-	_				~~	_							
	oiteunitno	8		ļ	200	_		├	<u> </u>	├	₩	ن ا	<u> </u>	-		<u> </u>	1
		73 74 73 76 77 78 79	Ц_	<u> </u>	-	 			}	ـــ	ļ	!	<u> </u>	 	<u> </u>	<u> </u>	1
		E	<u> </u>	<u> </u>		<u> </u>	—	Ļ	<u> </u>	ـــــ	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>	<u> </u>]
	3	1			1	<u> </u>		<u> </u>	<u> </u>			<u>L_</u>	<u> </u>		<u>L</u>]
	Ş	13			T		<u> </u>			L] .
					I		L _			L	-		1 1			L	3
	7	13						L		t				Ŀ]
		72	i		1										Γ]
		. 2			1.	Г		T .	Г							Γ	1
	N AFSC AGE	67 64 69 70 71 72	†			1							<u> </u>		 		1
		Ē		 	1					T				1.			1
	ý.	•		_	_	_		 		 		_	_	<u> </u>	_	1	1
	-	1	 	 	├	 	 	-		 		 	 	├─	┢	1-	1
•		卡	┿	 	 	-	├	 	 		_	├─	╌	-	┼~	╆	1
		1:	-	-	├		╌	-	 	-	├──		├	-	-	-	1 8
		8		├	├	-	-		 	 	-		-	┝┷		-	1
	AFSC / AGE	60 61 62 63 64 65		-	-	! —	<u> </u>	├—		├			├	├	-	├	AFLC-WPAFB-JAN 74 500
		발	<u> </u>			-	<u> </u>		-	1 ×	<u> </u>		├	├ ─	-	 	ı, Ž
	Q	13	ļ			├—	<u> </u>	├	-	B		├	<u> </u>	├—	├	 	1 1
	ž	3	<u> </u>			<u> </u>	<u> </u>	<u> </u>				<u> </u>		!	ļ. —	ļ	Ī
		13	<u> </u>	<u> </u>	ļ	<u> </u>	<u> </u>		<u> </u>	1	<u> </u>	<u> </u>	<u> </u>	↓	ļ	<u> </u>	1 5
	Z	13	<u> </u>	<u> </u>	<u> </u>	<u> </u>		<u> </u>		A	ļ	<u> </u>		<u> </u>		┞—	4`
		8	ļ	نيبا	ــنــا	<u> </u>	<u> </u>	 	<u> </u>	ਪ	L	<u> </u>		⊢ —	Ļ	<u> </u>	1
		3	1=	M	_	<u> </u>	_	=	 	मू	<u> </u>	_	<u> </u>	-			1
	9	6	J	×	×	<u> </u>	×	×	 	Δ	<u> </u>	×	×	7 X	! —	<u> ×</u>	1
	2	3	-	8	14		~	7	<u> </u>	Z	L	n	K	14	!	14	1
	AFSC / AGB	34 35 56 37	W	~	7	<u></u>	7	7	<u></u>	Н		7	K	त	1_	322K	1
		1.0	4	3	3	<u> </u>	3	4	L			M	M	3	ا نــا	3	1
	Z	2	m	7	7		8	7		F		4	3	Z		7	ı
		2								1							ı
	egyl . fzid	5	1		7		7	7	Ų	口		7	7	7		7	1
		49 50	6	9	6		6	6	٥	Σ		6	9	6		6	1
	* \$	\$	7	7	7		7	7				7	1	R		7	J
		1								>							ı
		4.7	0	L	8		8	0	0	A		7	4	1		b	1
	<u>ء</u> د	1	_	Ì	1		1	3	4	Z		4	1	N		1]
	HOURS	3	-						7								_
	وَ وَ	3								2						-	
	- 5	43 44 45 46								H							∐જ્ઞ
		4		-						4							₹
	Priority	Ę	_)	_	_		_	_		3	3	3	3	10	3]≅
	Type Task	8	R	7	7	7	7	7	7		7	7	7	~	7	~	
							• • •	• • •	• •			•					1 ~
	Release		Ť		•••					-		*	*	*	,,,		ž
	Release	8	0		0	0	0		,,,	0		*	*	著	٥	0	S.
	Release	96 96	0	0	0		٠,	0	٥	00	۵	*	*	0 0*2	٥	0 0	NCH CAR
	Release	96 96	0 0	00	0 0	00	00	00	0 0	0	0	*00	* 00	٥	90	Alolo	PUNCH CARD TRANSCRIPT
	Release	96 96	0 0	Aoo	0 0	Aoo	AOO	Alolo	٥	Ao	AOO	A 0 0 *	A O O *	Alo	AOO	3 A 0 0 5	PUNCH CAR
	Release	96 96	0	00	0	00	00	00	ADO	0	0	*00	* 00	٥	90	73A00 23	PUNCH CAR
	o espeledse	34 35 36 37 38 39	3 A 0 0	3 A O O	3A00	3 A 0 0	3 A 0 0	3A00	3A00	3 A O	3A00	3 A O O *	3 A O O *	3A0	3 A O O		PUNCH CAR
	NCLOK Clock No.	33 34 35 36 37 38 39	3 A 0 0	3 A O O	3A00	3 A 0 0	3 A 0 0	3A00	3A00	3 A O	73A00	3 A O O *	3 A O O *	3A0	3 A O O		PUNCH CAR
	NCLOK Clock No.	33 34 35 36 37 38 39	3 A 0 0	3 A O O	3A00	3 A 0 0	3 A 0 0	3A00	3A00	3 A O	3A00	73A00*	73A00*	173A0	3 A O O		PUNCH CAR
	NCLOK Clock No.	33 34 35 36 37 38 39	3 A 0 0	3 A O O	3A00	3 A 0 0	3 A 0 0	3A00	3A00	3 A O	04 73AOO	6 73AOO*	73A00*	4 73A0	3 A O O		PUNCH CAR
	S or CLOOK ZO.	29 30 31 32 33 34 35 36 37 38 39	3 A 0 0	3 A O O	3A00	3 A 0 0	3 A 0 0	3A00	3A00	173A0	4 73AOO	6 73AOO*	73A00*	4 73A0	3 A O O		PUNCH CAR
	S or CLOOK ZO.	29 30 31 32 33 34 35 36 37 38 39	3 A 0 0	3 A O O	3A00	3 A 0 0	3 A 0 0	3A00	3A00	173A0	204 73A00	6 73AOO*	73A00*	4 73A0	3 A O O		PUNCH CAR
	S or CLOOK ZO.	29 30 31 32 33 34 35 36 37 38 39	0 0 A S A 0 0	73A00	13A00	173A00	173A00	73400	73A00	173A0	02204 73AOO	86 73A00*	10 73 A00 *	04 73A0	00 A 5 7 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	4	PUNCH CAR
	S or CLOOK ZO.	26 27 28 29 30 31 32 33 34 35 36 37 38 39	3 A 0 0	3 A O O	3A00	3 A 0 0	3 A 0 0	3A00	3A00	173A0	2204 73A00	6 73AOO*	73A00*	4 73A0	3 A O O		PUNCH CAR
	S or CLOOK ZO.	28 26 27 28 29 30 31 32 33 34 35 36 37 38 39	0 0 A S A 0 0	73A00	D 13A00	D 73A00	173A00	73400	73A00	173A0	6 02204 73A00	86 73A00*	10 73 A00 *	04 73A0	D	4	PUNCH CAR
	S or CLOOK ZO.	28 26 27 28 29 30 31 32 33 34 35 36 37 38 39	8 D 73A00	D 73A00	13A00	0 D 73A00	173A00	73400	73A00	13A0	0 G 02204 73A00	86 73A00*	10 73 A00 *	04 73A0	2 D 73AOO	4	PUNCH CAR
	Selecte	28 26 27 28 29 30 31 32 33 34 35 36 37 38 39	8 D 73A00	09 D 73A00	10 D 173A00	0 D 73A00	111 D 173A00	12 D	73A00	13A0	EO 6 02204 73AOO	86 73A00*	10 73 A00 *	E11 E 04 73A0	E2 D 73AOO	4	PUNCH CAR
	Selecte	28 26 27 28 29 30 31 32 33 34 35 36 37 38 39	8 D 73A00	09 D 73A00	10 D 173A00	AEO DI 173AOO	A 1 1 1 D 73 A 0 0	A12 D 1 73A00	73A00	13A0	AEO 6 02204 73AOO	86 73A00*	10 73 A00 *	AE11 E 04 73A0	AE2 D 1 73A00	4	PUNCH CAR
	Selecte	28 26 27 28 29 30 31 32 33 34 35 36 37 38 39	8 D 73A00	09 D 73A00	10 D 173A00	AEO DI 173AOO	A 1 1 1 D 73 A 0 0	A12 D 1 73A00	73A00	13A0	AEO 6 02204 73AOO	86 73A00*	10 73 A00 *	AE11 E 04 73A0	3 A E 2 D 73 A O O	4	PUNCH CAR
	Selecte	28 26 27 28 29 30 31 32 33 34 35 36 37 38 39	D 73A00	D 73A00	10 D 173A00	AEO DI 173AOO	111 D 173A00	A12 D 1 73A00	73A00	13A0	63 A E O G 022 04 73 A O O	86 73A00*	10 73 A00 *	E11 E 04 73A0	G3AE2 D 73A00	4	PUNCH CAR
	S or CLOOK ZO.	28 26 27 28 29 30 31 32 33 34 35 36 37 38 39	8 D 73A00	09 D 73A00	D 13A00	0 D 73A00	A 1 1 1 D 73 A 0 0	12 D	73A00	13A0	AEO 6 02204 73AOO	86 73A00*	10 73 A00 *	AE11 E 04 73A0	3 A E 2 D 73 A O O	4	PUNCH CAR
	Selecte	18 19 20 21 22 22 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39	63A08 D 73A00	G3A09 D 73A00	G3A10 D 73A00	G3AEO D 73AOO	A 1 1 1 D 73 A 0 0	A12 D 1 73A00	D 73A00	H 13A0	163 A E O G 022 04 73 A O O	E 86 73A00*		IGSAEI E 04 73A0	G3AE2 D 73A00	4	PUNCH CAR
	Selecte	18 19 20 21 22 22 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39	2 63A08 D 73A00	G3A09 D 73A00	0 63410 0 13400	G3AEO D 73AOO	4 G3A11 D 73A00	1 63A12 D 73A00	2 D 73A00	O H 173AO	0 IG3AE0 6 02204 73A00	0 E 86 73A00*	0 E 10 73 A 0 0 *	0 IG3AE11 E 04 73A0	T ISAREA D 173A00	4	
	Nexx Node Sel. Mode Sel. Mode Trobas of Pro	18 19 20 21 22 22 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39	EZ G3A08 D 173A00	E3 G3A09 D 173A00	ED G3A10 D 73A00	IGSAEO D 73A00	E4 G3A11 D 73A00	51 63A12 D 73A00	52 D 73A00	EO H 13A0	EO IGAREO G 02204 73AOO	E0 E 86 73A00*	EO 1 E 10 73 AOO*	EO IGARILE 104 73A0	or 1163AE2 D 1 73A00	4	
	Nexx Node Sel. Mode Sel. Mode Trobas of Pro	18 19 20 21 22 22 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39	AEZ GSAD8 D 13ADO	AE3 63A09 D 73A00	AEO G3A10 D 173A00	P IGSAEO D 73A00	AE4 63411 D 73400	ES1 63A12 D 73A00	E S Z	AEO H 13AO	A EO IGAREO G 02204 73AOO	A E 0 E 86 73 A 0 0 *	A E O	AEO IGBAEN EN 04 73AO	PINT IGAMEZ D 1 1 73AOO	4	
	Selecte	18 19 20 21 22 22 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39	3AE2 G3A08 D 73A00	3 A E 3 6 3 A 0 9 D 7 3 A 0 0	3/A/E/0 G3/A/1/0 D 7/3/A/0/0	DP IGSAEO D 73A00	3AE4 G3A11 D 73A00	RESI G3A12 D 73A00	RESZ D 73A00	3 A E O H 173 A O	3AEO IGZAEO 6 02204 73AOO	3AE0 E 86 73A00*	3AE0 E 10 73A00*	3AEO IG3AEN EN 04 73AO	PINT IGAMEZ D 1 1 73AOO	4	
	W UC Next Node	18 19 20 21 22 22 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39	73AE2 63A08 D 73A00	73AE3 63A09 D 73A00	73AE0 G3A10 D 13A00	HOP IGSAEO D 73AOO	73AE4 G3A11 D 73A00	PRESI G3A12 D 73A00	PRESZ D 73A00	AEO H 13AO	A EO IGAREO G 02204 73AOO	73AE0 E 86 73A00*	73AEO E 10 73A00*	73AEO IG3AEU E 104 73A0	DEPIBIT ISABEL D 173AOO	4	
	Nexx Node Sel. Mode Sel. Mode Trobas of Pro	18 19 20 21 22 22 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39	3AE2 G3A08 D 73A00	3 A E 3 6 3 A 0 9 D 7 3 A 0 0	3/A/E/0 G3/A/1/0 D 7/3/A/0/0	DP IGSAEO D 73A00	3AE4 G3A11 D 73A00	RESI G3A12 D 73A00	RESZ D 73A00	3 A E O H 173 A O	3AEO IGZAEO 6 02204 73AOO	3AE0 E 86 73A00*	3AE0 E 10 73A00*	3AEO IG3AEN EN 04 73AO	PINT IGAMEZ D 1 1 73AOO	4	
	W UC Next Node	18 19 20 21 22 22 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39	X173AE2 63A08 D 1 73A00	X173AE3 G3A09 D 73A00	R173 A E O G 3 A 1 O D 173 A O O	SHIP IGSAEO D 73A00	X 7 3 A E 4 G 3 A 1 1 D 7 3 A 0 0	PRESI G3A12 D 73A00	VPRESIZ D 73A00	3 A E O H 173 A O	L73AEO IG3AEO G 02204 73AOO	W73AE0 E 86 73A00*	K 73A E 0	N73AEO IG3AEN EN 04 73AO	PDEPORT IGAREZ D 1 1 73AOO	4	
	NCLOK Node Sel. Most Node Co. NCLOK No. NCLOK No. NCLOK No. NCLOK No. NCLOK No. Nc. Nc. Nc. Nc. Nc. Nc. Nc. Nc. Nc. Nc	18 19 20 21 22 22 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39	7 K73AE2 G3A08 D 1 13A00	8 X/73AE3 G3A09 D 73A00	9 R13AEO 63A10 D 1 73A00	HOP IGSAEO D 73A00	73AE4 G3A11 D 73A00	PRESI G3A12 D 73A00	PRESZ D 73A00	3 A E O H 173 A O	O L73AEO IG3AEO G 02204 73AOO	0 W73AE0 E 86 73A00*	0 K73AE0	O NITISAED ISTAELLE 1 04 73AD	1 PDEPOT IGSAEZ D 73AOO	2 K13AE11 D 7	
E WW	NCLOK Node Sel. Most Node Co. NCLOK No. NCLOK No. NCLOK No. NCLOK No. NCLOK No. Nc. Nc. Nc. Nc. Nc. Nc. Nc. Nc. Nc. Nc	18 19 20 21 22 22 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39	017 X73AE2 63A08 D	08 X73AE3 63A09 D 73A00	09 R13AED 63A10 D 73A00	10 SHIPP IGSAEO DI 173AOO	10 1173AE4 G3A11 D 73A00	111 VPRES1 G3A12 D 73A00	12 NPRES2 D 73A00	3 A E O H 173 A O	ON LIZAED IGAED G 02204 73AOD	EO W73AEO E 86 73AOO*	EO K73AEO	ED NISAED ISSAEN EN 04 73A0	1 PDEPOT IGSAEZ D 73AOO	2 K13AE11 D 7	
2 :ORM 11	NCLOK Node Sel. Most Node Co. NCLOK No. NCLOK No. NCLOK No. NCLOK No. NCLOK No. Nc. Nc. Nc. Nc. Nc. Nc. Nc. Nc. Nc. Nc	8 9 10 11 12 13 14 15 16 17 16 17 16 19 20 21 22 24 25 26 26 27 28 29 30 31 32 33 34 35 35 35 37 38 39	017 X73AE2 63A08 D	A D 8 X 7 3 A E 3 G 3 A D 9 D 7 3 A D 0	A 09 R73A ED G3A 10 D 73A 00	ALIO SHIPP IGSAEO DI 173AOO	A110 X73AE4 G3A111 D 73A00	AIII VPRESII GZAIZ D 73A00	A112 VPRESIZ D 73A00	3 A E O H 173 A O	ADD L73AED IG3AED G 02204 73ADD	AEO W73AEO E 86 73A00*	AEO K73AEO E 10 73A00*	AEO N73AEO IG3AEN EN 04 73AO	1 PDEPOT IGSAEZ D 73AOO	2 K13AE11 D 7	
9. 2 FORM 11	NCLOK Node Sel. Most Node Co. NCLOK No. NCLOK No. NCLOK No. NCLOK No. NCLOK No. Nc. Nc. Nc. Nc. Nc. Nc. Nc. Nc. Nc. Nc	8 9 10 11 12 13 14 15 16 17 16 17 16 19 20 21 22 24 25 26 26 27 28 29 30 31 32 33 34 35 36 37 38 39	3 A O 1 X 7 3 A E 2 63 A O 8 D 1 1 7 3 A O O	A D 8 X 7 3 A E 3 G 3 A D 9 D 7 3 A D 0	3 A O 9 R 7 3 A E O 63 A 1 O D 1 7 3 A O O	ALIO SHIPP IGSAEO DI 173AOO	3 A 1 0 X 7 3 A E 4 G 3 A 1 1 D 7 3 A 0 0	3A111 VPRESI G3A12 D 73A00	3A12 VPRES2 D 73A00	3 A E O H 173 A O	3 AOO L 73 A EO IG3 A EO G 02204 73 A OO	3 A E O W 73 A E O E 86 73 A O O *	3AED K73AED E 10 73AOD*	3 A E O N'73 A E O I G3 A E I E 04 73 A O	1 PDEPOT IGSAEZ D 73AOO	2 K13AE11 D 7	PRINCIPLE EDITIONS OF THIS FORM WILL IE USED PUNCH CAR WITH CAR
No. 2 ED FORM 11	NCLOK Node Sel. Most Node Co. NCLOK No. NCLOK No. NCLOK No. NCLOK No. NCLOK No. Nc. Nc. Nc. Nc. Nc. Nc. Nc. Nc. Nc. Nc	8 9 10 11 12 13 14 15 16 17 16 17 16 19 20 21 22 24 25 26 26 27 28 29 30 31 32 33 34 35 36 37 38 39	017 X73AE2 63A08 D	08 X73AE3 63A09 D 73A00	A09 R73AEO G3A10 D 173A00	10 SHIPP IGSAEO DI 173AOO	A110 X73AE4 G3A111 D 73A00	AIII VPRESII GZAIZ D 73A00	A112 VPRESIZ D 73A00	3 A E O H 173 A O	G3A00 L73AEO IG3AEO G 02204 73AOO	63AEO W73AEO E 86 73AOO*	G3AED K73AED E 10 73AOO*	GRAFO NIBAFO IGRAPI E 1 04 73A0	PDEPORT IGAREZ D 1 1 73AOO	GAREZ KIJARII III DIII I	
T No. 2 UDED FORM 11	NCLOK Node Sel. Most Node Co. NCLOK No. NCLOK No. NCLOK No. NCLOK No. NCLOK No. Nc. Nc. Nc. Nc. Nc. Nc. Nc. Nc. Nc. Nc	S 6 7 8 9 10 11 12 13 14 15 16 17 16 19 20 21 22 22 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39	3 A O 1 X 7 3 A E 2 63 A O 8 D 1 1 7 3 A O O	A D 8 X 7 3 A E 3 G 3 A D 9 D 7 3 A D 0	3 A O 9 R 7 3 A E O 63 A 1 O D 1 7 3 A O O	ALIO SHIPP IGSAEO DI 173AOO	3 A 1 0 X 7 3 A E 4 G 3 A 1 1 D 7 3 A 0 0	3A111 VPRESI G3A12 D 73A00	3A12 VPRES2 D 73A00	3 A E O H 173 A O	3 AOO L 73 A EO IG3 A EO G 02204 73 A OO	3 A E O W 73 A E O E 86 73 A O O *	3AED K73AED E 10 73AOD*	3 A E O N'73 A E O I G3 A E I E 04 73 A O	1 PDEPOT IGSAEZ D 73AOO	163/4/6/2 K/7/3/4/6	PREVIOUS EDITIONS OF THIS FORM WILL BE USED UNTH, STOCK IS EXAMUSTED.
OUT No. 2 ENDED FORM 11	NCLOK Node Sel. Most Node Co. NCLOK No. NCLOK No. NCLOK No. NCLOK No. NCLOK No. Nc. Nc. Nc. Nc. Nc. Nc. Nc. Nc. Nc. Nc	4 3 6 7 8 9 10 11 12 13 14 13 14 15 16 17 16 19 20 21 22 22 24 25 26 27 28 29 30 31 22 33 34 35 36 37 36 39	3 A O 1 X 7 3 A E 2 63 A O 8 D 1 1 7 3 A O O	A D 8 X 7 3 A E 3 G 3 A D 9 D 7 3 A D 0	3 A O 9 R 7 3 A E O 63 A 1 O D 1 7 3 A O O	ALIO SHIPP IGSAEO DI 173AOO	3 A 1 0 X 7 3 A E 4 G 3 A 1 1 D 7 3 A 0 0	3A111 VPRESI G3A12 D 73A00	3A12 VPRES2 D 73A00	3 A E O H 173 A O	G3A00 L73AEO IG3AEO G 02204 73AOO	63AEO W73AEO E 86 73AOO*	G3AED K73AED E 10 73AOO*	GRAFO NIBAFO IGRAPI E 1 04 73A0	1 PDEPOT IGSAEZ D 73AOO	163/4/6/2 K/7/3/4/6	PREVIOUS EDITIONS OF THIS FORM WILL BE USED UNTH, STOCK IS EXAMUSTED.
NPUT No. 2 XTENDED FORM 11	NCLOK Node Sel. Most Node Co. NCLOK No. NCLOK No. NCLOK No. NCLOK No. NCLOK No. Nc. Nc. Nc. Nc. Nc. Nc. Nc. Nc. Nc. Nc	4 3 6 7 8 9 10 11 12 13 14 13 14 15 16 17 16 19 20 21 22 22 24 25 26 27 28 29 30 31 22 33 34 35 36 37 36 39	3 A O 1 X 7 3 A E 2 63 A O 8 D 1 1 7 3 A O O	A D 8 X 7 3 A E 3 G 3 A D 9 D 7 3 A D 0	3 A O 9 R 7 3 A E O 63 A 1 O D 1 7 3 A O O	ALIO SHIPP IGSAEO DI 173AOO	3 A 1 0 X 7 3 A E 4 G 3 A 1 1 D 7 3 A 0 0	3A111 VPRESI G3A12 D 73A00	3A12 VPRES2 D 73A00	3 A E O H 173 A O	G3A00 L73AEO IG3AEO G 02204 73AOO	63AEO W73AEO E 86 73AOO*	G3AED K73AED E 10 73AOO*	GRAFO NIBAFO IGRAPI E 1 04 73A0	1 PDEPOT IGSAEZ D 73AOO	163/4/6/2 K/7/3/4/6	PREVIOUS EDITIONS OF THIS FORM WILL BE USED UNTIL STOCK IS EDIALUSTED.
INPUT No. 2 EXTENDED FORM 11	NCLOK Node Sel. Most Node Co. NCLOK No. NCLOK No. NCLOK No. NCLOK No. NCLOK No. Nc. Nc. Nc. Nc. Nc. Nc. Nc. Nc. Nc. Nc	S 6 7 8 9 10 11 12 13 14 15 16 17 16 19 20 21 22 22 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39	3 A O 1 X 7 3 A E 2 63 A O 8 D 1 1 7 3 A O O	A D 8 X 7 3 A E 3 G 3 A D 9 D 7 3 A D 0	3 A O 9 R 7 3 A E O 63 A 1 O D 1 7 3 A O O	ALIO SHIPP IGSAEO DI 173AOO	3 A 1 0 X 7 3 A E 4 G 3 A 1 1 D 7 3 A 0 0	3A111 VPRESI G3A12 D 73A00	3A12 VPRES2 D 73A00	3 A E O H 173 A O	G3A00 L73AEO IG3AEO G 02204 73AOO	63AEO W73AEO E 86 73AOO*	G3AED K73AED E 10 73AOO*	GRAFO NIBAFO IGRAPI E 1 04 73A0	1 PDEPOT IGSAEZ D 73AOO	163/4/6/2 K/7/3/4/6	FORM 1530 PREVIOUS EDRICAS OF THIS FORM WILL BE USED.
INPUT No. 2 EXTENDED FORM 11	NCLOK Node Sel. Most Node Co. NCLOK No. NCLOK No. NCLOK No. NCLOK No. NCLOK No. Nc. Nc. Nc. Nc. Nc. Nc. Nc. Nc. Nc. Nc	4 3 6 7 8 9 10 11 12 13 14 13 14 15 16 17 16 19 20 21 22 22 24 25 26 27 28 29 30 31 22 33 34 35 36 37 36 39	3 A O 1 X 7 3 A E 2 63 A O 8 D 1 1 7 3 A O O	A D 8 X 7 3 A E 3 G 3 A D 9 D 7 3 A D 0	3 A O 9 R 7 3 A E O 63 A 1 O D 1 7 3 A O O	ALIO SHIPP IGSAEO DI 173AOO	3 A 1 0 X 7 3 A E 4 G 3 A 1 1 D 7 3 A 0 0	3A111 VPRESI G3A12 D 73A00	3A12 VPRES2 D 73A00	3 A E O H 173 A O	G3A00 L73AEO IG3AEO G 02204 73AOO	63AEO W73AEO E 86 73AOO*	G3AED K73AED E 10 73AOO*	GRAFO NIBAFO IGRAPI E 1 04 73A0	1 PDEPOT IGSAEZ D 73AOO	163/4/6/2 K/7/3/4/6	PREVIOUS EDITIONS OF THIS FORM WILL BE USED UNTIL STOCK IS EDIALUSTED.
INPUT No. 2 EXTENDED FORM 11	NCLOK Node Sel. Most Node Co. NCLOK No. NCLOK No. NCLOK No. NCLOK No. NCLOK No. Nc. Nc. Nc. Nc. Nc. Nc. Nc. Nc. Nc. Nc	2 3 4 5 6 7 8 9 100 11 12 13 14 13 14 17 16 19 20 21 22 22 24 24 35 26 27 26 29 29 30 43 32 34 35 36 37 36 39	3 A O 1 X 7 3 A E 2 63 A O 8 D 1 1 7 3 A O O	A D 8 X 7 3 A E 3 G 3 A D 9 D 7 3 A D 0	3 A O 9 R 7 3 A E O 63 A 1 O D 1 7 3 A O O	ALIO SHIPP IGSAEO DI 173AOO	3 A 1 0 X 7 3 A E 4 G 3 A 1 1 D 7 3 A 0 0	3A111 VPRESI G3A12 D 73A00	3A12 VPRES2 D 73A00	3 A E O H 173 A O	G3A00 L73AEO IG3AEO G 02204 73AOO	63AEO W73AEO E 86 73AOO*	G3AED K73AED E 10 73AOO*	GRAFO NIRALO IGRAPII E 1 04 73A0	1 PDEPOT IGSAEZ D 173AOO	163/4/6/2 K/7/3/4/6	FORM 1530 PREVIOUS EDITIONS OF THIS FORM WILL BE USED FEB AF 1530 UNIT, STOCK IS EXAUSTED.

:

-350

Figure 31. Integrated avionics FLR subsystem network (continued).

eg.

. ji Ab,

401	1 puni luo	न				_										_	l	
		計	-+	-		-	7.1		11.1						1			
	N AFSC / AGE N AFSC / AGE	Ž,	_															* .
	3	13									7	į.,					i	
	Š	2					:		į,						<u> </u>		ŀ	
_		7.5												-	<u> </u>		l	
	Z	2										2	ļ		-	├	į	
-		의							⊢-				-	-	├		ł	
		2			_		<u> </u>		├			-		-	-	-	i	
	8	딝					_			-			├	┝┈	├─	├	ł	
	3	릐	_					Ļ	ļ		-		 	├	├─	├	ł	
	2	<u>\$</u>										-	├	├	 	┼──	ł	
-		픣				7.3		-					22.1.	-	-	_	1 .	,
		-	-+					 	-	7.	-	┝	-	 	┢╾	_	g	
-		許	-+			-		-	├	-	-			-	 	 	1	
	5	위							 -	_			\vdash	 	1	 	ž	
	\$	릙						-	 	-	-		 	_	1		1 &	
	ပ္ထ	ल	1	1								T	-		Ī		1}	
	¥	뉡									· ·						AFLCWPAFB-JAN 74 500	
•	z	2						_						-]	
•		2				_]	
•	AFSC / AGE N AFSC / AGE	*				_										<u> </u>	4	
	9	2				×c		×	匚		L				1_	 	1 .	
	3	2	_7			7		त्त			<u> </u>	<u> </u>	<u> </u>	1	Ļ _	!	4	
	35	33		Z	11	7		a					1_	<u> </u>	1_	↓	1	
	₹	3				2		m					<u> </u>	 	1	 	4	***
•	Z	22		8				G			<u> </u>	L_		 	1	 	4	
		2		Ξ					1			ļ			<u> </u>	 	4	•
	eqvī . fzid	5	\Box			_		4			<u> </u>	-	├	-		┼—	ł	
•	-	48 49 50	\Box	F		6	-	9	_	-	-	ــــــــــــــــــــــــــــــــــــــ	—	 -	┼—	╂—	-1	
	* *	\$		TI.		٦	-	K	-		-	1	-	\vdash	+-	+-	1	1.1
		3		S			-	 _	-	 	-	 	+-	-	+	+	ł	
	_	6		_		0	-	9	├	<u> </u>	<u> </u>	 	 	 	┼	1-	1	
	HOURS (Tenths)	43 44 45 46		AR		_	-	3	├─	 	-	Ť	-	1	1	 	1_	
	HOURS (Tenths	3		- 3			-	├	┝	 	 - -	-	 	1	+-	 	∤ ≣	
	ΞĒ	*	-:	AD	-		├	╫┈	┼──	-	├─	+	-	+	+-	 -	뛶	
-		27		स			-	-	┼─	-	-	1.	 	1	1	†	18	
	Yijoi19	7	_		3	M	=	-	-	1		+	1	\vdash		1	PUNCH CARD TRANSCRIPT	
•	Type Task	8	7		23	ีก	a	a	1]ᢓ.	
•		È			-	0米23						1	1			Γ]3	
•		8	0	0	.0	0	Q	0]=	
•	ó	6	3 AO	0	0	300	8	2			Γ			匚			Jš	
	¥Z	3	d	A	V	4	4	d						_	1	ــــــــــــــــــــــــــــــــــــــ	Ī≖	
	NCLOK Clock No.	34 35 36 37	N	3	3	3	M	m		1		<u> </u>	ļ	<u> </u>	<u> </u>	 	-	
	ž J	3	7	7	7	7	1	7	╙	<u> </u>	↓	—	┼	₩.	+-	┼	4	
		3		·	<u> </u>	L.	ļ	Ļ	↓_	 	1	╄	┼	₩	┿	┼	4	
		8			<u> </u>	-	\vdash	\vdash	1-	ļ.,	-	 	┼	┼	┼	1-	1	
	ة ة 1	2	-			 	├	⊢	H	├	┼	+-	╁	-	+-	┼	1	
		8			 - -		┼		+	 	+-	+	+	1	┼	╁	1	1
	MSBF Probal	28 29 30 31 32 3		<u> </u>	 		 -	 -	+-	 	+	1	1	\vdash	1	1	1	
	žį	27 2		 	 	_	1	T	1	\mathbf{I}^{-}		1					1	
•	Sel. Mode	8	O		7	0	6		\								1	
•		2		工					E								4	
		2			2				\Box		<u> </u>		<u> </u>	1	4_	\perp	4	
	Ž	8		Ē	15		\Box		<u> </u>	 	1_	↓	 	4_	4—	+	4	
	ž	2			14	<u> </u>	<u> </u>		╀	 	—	1-	-	+-	+	+-	-	•
	¥	티			163		-	1	-	1	┼	+	+-	+	+	+-		
	ž			L	၂ဖ		-	1-	+-	-	+-	+-	╁╌	+-	+-	+-	-	
		틸		-	ᄪ	-	+-	+	-	┼	┼─	+-	+-	+	╁	+-	-	
		Ξ	_	-	0	0	0	0	+-	+-	+-	+	+-	+-	+	+	٦_	
		٥	AEO	8	F	ř	F	15	+-	+-	╁	+-	+-	1	+	1	Įģ.	
	Š	-	1	4	A	A	d	4	-	1	+-	+-	1	+	1	1	1	
	y	F	3	14	7	M	M	1 *	-	+-	+-	+	+	\top	T	1] \$	
		1-	<u> </u>	-	-	-	-	V773	1	T	T^-			I^-	I	$oldsymbol{\Box}$	ğ	
						_	0	1 5	-	1	Τ	1	\Box	$oldsymbol{\mathbb{L}}$		·I	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
	JOY	12 13	7	-						\top	Т	T	1	Т	T	T	\$ \$	
_		11 12 13 14 15 16 17 18 19 20 21 22 23 24 25	Ø				1	L				_		_				
=		등	Ø		0	6	7	0	上			I			丰	二	- § 2	
RM 11		등	S O B		Q	6	7	8			E				E		S EOMON	
2 :ORM 11		등	S O B		000	000	NO A	' I 🗸	2		E					E	VIOUS EDMON	
6. Z FORM 11		7 8 9 10 11	3AEO Q		A A O O	2000	ANDO	' I 🗸	2								PREVIOUS EDITIONS OF THIS FORM WILL BE USED UNTIL STOCK IS EDIAUSTED.	
No. 2 ED FORM 11		7 8 9 10 11	GSAEO		G 2 A O O	C 7 00 0	A A O O	2	2	E							regylous Ebmow	
IT No. 2 uded form 11		11 01 0 8 2 9 8	I G3AEO		A A O O	TC X AO	ANDO	' I 🗸	2	E							┨	
PUT No. 2 Tended form 11		11 01 0 0 10 11	IG3AEO Q		G 2 A O O	C 7 00 0	ANDO	2	2	E							┨	
INPUT No. 2 EXTENDED FORM 11		3 4 5 6 7 8 9 10 11	I G 3 A E O		G 2 A O O	TC X AO	ANDO	2	2	E							┨	
INPUT No. 2 EXTENDED FORM 11		11 01 0 0 10 11	I G 3 A E O		G 2 A O O	TC X AO	ANDO	2	2	E							┨	
INPUT No. 2 Extended form 11		3 4 5 6 7 8 9 10 11	I G 3 A E O		G 2 A O O	TC X AO	ANDO	2	2	E			84				AF FORM 1530 PREVIOUS EDITION	

Figure 31. Integrated avionics FLR subsystem network (continued).

eventual corrective action so that the simulation clocks and frequencies of dispatch are not distorted.

Access problems are peculiar to each design and usually cannot be extrapolated from data on another aircraft. However, this example of an A7D access problem is shown to illustrate the impact a poor design can have, and emphasize the importance of a thorough review of mock ups, prototypes, and test aircraft to highlight and correct any such condition.

The FLR Air Navigation Multiple Indicator, WUC 73AEO, is mounted in the cockpit. There is no difficulty in removing and replacing this indicator. However, there is a small plug behind it that sometimes needs replacement. It does not even have a work unit code. This plug can only be reached if the windshield is removed. Changing windshields is an 11-hour job by three 431C1 Aero Repair Specialists. Before they can do it though, two 322X1s must remove the HUD and two 328X3s must remove the RHAW indicator. After the multiple indicator and plug are changed and all the rest put back together, the 422X1s must do a cabin pressure check. This requires 322X1s to swing out the forward looking radar system so that pressure lines can be hooked up through the nose. After everything is connected, there is a 24 hour cure time for the test. Because of poor access, the failure of one small plug can tie down an aircraft for about two days.

Only two of the nine FLR LRUs are illustrated in Figure 31. The shop entry for the indicator coming off the long access goes directly to the appropriate shop tasks, bypassing the G probability. The NRTS task is followed by a depot turnaround time dummy. The time for this task is set by the program and no extended 11 time entry is required. A task is shown for bench check on return from depot. This task does not appear in MDC data runs. A maintenance concept assumption from the operating command and/or the opinion of experienced technicians should be sought to determine whether such checks ought to be in the data base for a new aircraft.

One more unusual network feature is shown in Figure 31. When the mount breaks or is damaged, the radar set has to be realligned by dry boresighting. This is a six hour job. It is shown in parallel to the Q task following the G probability that determines whether the mount had to be changed.

V. NETWORKS FOR PHASED AND PERIODIC SCHEDULED MAINTENANCE

Phased Inspections

The number and frequency of phases is a policy assumption to be provided by the operating command. Networks for phased inspection work are based on phase procedures for similar aircraft under a similar inspection concept and must be developed through interview with experienced technicians in the field. The inspection work cards are too detailed to network directly and MDC reporting is far too gross. The work done in each phase and the task sequences, times, and crew sizes for each AFSC who has a scheduled task, must

be set out in network form. A linear series of work card tasks by the same crew should be networked as a single task. The simplest phase network would show each specialist crew's work as one task and all these tasks would be shown in parallel. It is not usually so simple since there may be constraints and access requirements among the work by various specialists that must be identified and shown in the network. Any scheduled removals which go to the shop for servicing must also be shown. For example, hydraulic filters are regularly replaced and sent to the shop for clearning, generating a task workload in the hydraulics shop.

The phase tasks for comparable systems must be carefully reviewed in terms of the new aircraft design and maintenance concepts in order to delete inapplicable tasks, modify others, and add any new tasks. Contractor recommendations, engineering evaluations, opinions of experienced maintenance personnel, and operating command policy assumptions need to be sought and considered in making these judgments.

Unscheduled corrective maintenance in phase may be estimated from MDC data on similar systems and subsystems. An MDC run of corrective maintenance in phase is shown in Figure 32. Data are grouped by AFSC to match the way the inspection portions of phase are networked. For each AFSC and work unit code it shows the frequency of R or M corrective actions per phase and the average time per action. The summary also shows manhours per action, which can be converted to average elapsed time by dividing by typical crew size.

Portions of an example phase inspection network are shown in Figure 33. The frequency (e.g., every 100 hours) is scheduled on the Form 20s. The main networks include a phase dummy sortic followed by tasks for aircraft washing and ending with the phase entry node (SPLIT). The phase network follows after the last main network task. It starts with the phase network entry node and an E probability split into the various phases. The examples in Figure 33 show the main network portion, the beginning of the phase network, the beginning of the phase 3 portion, and the 424X0 work in Phase 3.

In coding phase tasks, type task is 3 (scheduled) and priority is 2. The organizational maintenance personnel dedicated to phase are coded 431P1. The recommended task and node naming convention is P action code followed by a sequential task number for inspection tasks, and UNS in columns 12 - 14 followed by a sequential task number for corrective actions. J node numbers may be used, provided that they are a different series than are used in any of the main networks. In the Figure 33 example, numbers under J1000 were used for other main networks, so J1000 and over were reserved for phase.

Unscheduled maintenance can be entered as a single task for each AFSC. This task represents all the corrective work done by that AFSC in one phase. Tasks in flight line unscheduled maintenance networks described in the previous chapter had to be broken out by action type and work unit code to correctly simulate the job frequencies and dispatch

X 100 * ***	***		;					
/ ` `	= 11D	CREW= 1	ELAP =	. BHRS.	1. H	ACTS	SHWH C.+6	.36 MMH7
 Y	= 110	CREW= 2	ELAP = .	2.3HRS.	16. M	ACTS		
ODE:	- 110	CREWES	ELAP =	3.4HRS.	2. H	ACTS		
		.36 MMH/NO. OF		. 67	. 67 4A/NO . OF	PHASES	.17 ELAP/NO. OF PHASES	OF PHASES FOR
100 M	# 45A	CREW= 2	ELAP =	2.0HRS.	2. R	ACTS	53.8 MMHS	.13 H
#OOM	= 46A	CREW= 4	ELAP =	6.5HRS.	1. R	ACTS		
		. 13 MMH/ NC. OF	PHASES	0.1	1A/NO. OF	PHASES	.64 ELAPINO.	OF PHASES FOR
#ODM	= 468	CREW= 1	ELAP =	1.0HRS.	Z . X	ACTS		.27 H
≡ NUC=	= 468	CREWE 2	ELAF =	1.7HRS.	9. A	ACTS		
AUC:	= 468	CREWIE 3	ELAP =	8.3HRS.	1. M	ACTS		
		CRITKI 4	ELAF =	5.3HRS.	1. M	ACTS		
SOM MAC	11	CREW= 1	ELAP =	1.0HRS.	2. R	ACTS	15.6 MMHS	1/HMH 90.
	= 468	CREW= 2	ELAF =	1.4HRS.	5. R	ACTS		
=Onk ³		CREW= 1	ELAP =	1.0HRS.	1. V	ACTS	3.0 MMHS	* 01 KRH/4
=00:	= 469	CREW= 2	ELAP =	1.0HRS.	1. V	ACTS		
HOCK	= 46B	CREW= 2	ELAP =	1.4HRS.	2. T	ACTS	5.6 MMHS	. 62 MMH/1
		TO ST MMHZNO. OF	PHASES	90.	TAZNO. OF	PHASES	.17 ELA FZNO. DF	PHASES
#OOK	39 7 =	CREW= 2	ELAP =	4.4HRS.	2. A	ACTS	17.6 MMHS	٠ 20.
=00r		CREW= 2	ELAP =	4.1HRS.	2. R	ACTS	27.8 MMHS	.11 MMH/N
=30. ^M		CREW= 3	ELAP =	3.8HRS.	1. R	ACTS		
NO.	= 46E	CREW= 2	ELAF =	3.1HRS.	5 v	ACTS	31.4 MMHS	12 MMHZ
•			_	. 02	MA/NO. 0F	PHASES	.14 ELAPZNO. OF	PHASES
, , , , , , , , , , , , , , , , , , , ,	<u>!</u> !	L. DC MMH/NC. OF	PHASES	00.0	JO YAZNO. OF	PHASES	6.30 ELAFINO. OF	OF PHASES FOR
*******	*	1.15 MMF/NO.	OF PHASES	•	.13 MA /NO:	OF PHASES	1 HWH 7.9	AFS
		:						

Figure 32. Data bank printout of AFSC 424XO unscheduled maintenance in phase.

	wo	119vaiino)	2															
		Z AFSC / AOR	2				·											
		3	7		-	-		\dashv	\dashv						_	┿╌		
		ý	767								Ĺ							
			7.0															
	,	z	2.		_				-	_	-					╂╌┤	-	
	•		7	_							Ť							
		ō	71												_			
		ý	2			_	-						-			+	-	
		AF.	•	\vdash							·							1.
		Z	67															
			3					-		•	٧				_	X	_	AFLC-WPAFB-JAN 74 500
		9	3	-			-	<u>٧</u>		7	100	-			<u> </u>	<u>ਹ</u>	¥	NY.
		3	3			ტ		A			TI						Ack	AFB.
		AFSC / AGE	1 62	-		Jη		æ Æ			4:		_			>	Ŋ	.c-w
		Z	9	\vdash	_			S			PEC					Σ	35	¥
			86								þ			-				İ
		#	18	SE	-	×	<u> </u>	^ ×		-	NS			<u> </u>	<u> </u>	-0-	١d	
		/ Y 6	9	A S		-3	~	-		+	I				7	US	1	
		AFSC / AGI	54 55 56 57 58 39 60 61 62 63 64 65	Hd		3	В	M		1					耳	~	13	
			36	٩		54	14	34		+	(ا				+	1	44	
		z	52 53	E	-	-2	\dashv	٦)		+-	SE	-			+	1 ಬ		l
		eqyl . taid	51	8		7	7	7			~				口	A	7	
			99 99	FØ		29	29	29		-	PH/				\dashv	5	29	
		* *	88	ü			•••	-,,		+	-				T	100		ŀ
			42	ਹ		7	0	٥			#R				\Box		0	
		25 d (8 d	48 44 45 46	-			_	3		+	1				+	SE	4	_
		HOURS	3	- H				ᅱ	_	+	0				\dashv	T K	_	됩
		- 5	3	WAS							00				\Box	₹		SS
		Yivif	41 42	₹		α	7	~~	~~	+	1	~	7	ત	+	٩	2	TRA
	•	Type Task	•	-1		W	3	7	3			32	3	3	1	1	32	2
			_				_		_	_	1			_				
		espeled	8		_		_					-			4		1.0	3
			38	0	٥	0	0	0	0		SE	SE	SE	5 E	+	SE	SE	CH CH
			38	0 / 0	0	~	0/0	0 / 0	0	Į	AS			AIS		AS	ASE	PUNCH CARD TRANSCRIPT
			38	100	100	100	001	100	100		AS			AIS		AS	HASE	PUNCH CA
			34 38 36 37 38	7	0	~	10	ò	0	+ WWV	5	PHASE	PHASE	PHASE		8	PHASE	PUNCH CA
		NCLOK Clock No.	33 34 36 36 37 30	100	100	100	001	100	100		AS	PHAS	3 PHAS	3 PHAS		AS	PHASE	PUNCH CA
		NCLOK Clock No.	33 34 36 36 37 30	100	100	100	001	100	100	 	AS	PHAS	PHAS	PHAS		AS	PHASE	PUNCH CA
		NCLOK Clock No.	33 34 36 36 37 30	100	100	100	001	100	100		AS	PHAS	3 PHAS	3 PHAS		AS		PUNCH CA
		NCLOK Clock No.	33 34 36 36 37 30	100	100	100	1 0000	100	100		AS	PHAS	3 PHAS	3 PHAS		AS		PUNCH CA
		MSBF or NCLOK Probability Clock No.	27 28 29 30 31 32 33 34 38 36 37 38	100	1000	100	1 000	100	1/0/0/0/		AS	PHAS	3 PHAS	3 PHAS		AS		PUNCH CA
		NCLOK Clock No.	27 28 29 30 31 32 33 34 38 36 37 38	100	100	7 0 0 0 C	10000	1000	1/0/0/0/1		AS	SAHA 148 .	E 33 PHAS	E 33 PHAS		AS		PUNCH CA
	•	Model Mass or NCLOK Clock No.	27 28 29 30 31 32 33 34 38 36 37 38	1000	1	2 D 0001	3 0	4 D 0 0 0 1	7 0 0 1 1 1 0 0 0 1		SMHd	SMH9 45 1 3 1	E 33 PHAS	3 E 33 PHAS		PHAS	0 0	PUNCH CA
	•	Model Mass or NCLOK Clock No.	27 28 29 30 31 32 33 34 38 36 37 38	1000	1000	02 D 0001	03 0 00 00	1000	17 D		SMHd	S E 34 PHAS	SZ E 33 PHAS	S3 E 33 PHAS		PHAS		PUNCH CA
		Model Mass or NCLOK Clock No.	27 28 29 30 31 32 33 34 38 36 37 38	1000	1/000/1 5 1 000/1	1002 D 0001	3 0	10004 10 10001	PLIT D 0001		SMHd	HAS11 E 1 34 PHAS	HASZ E 33 PHAS	HASS E 33 PHAS		PHAS		PUNCH CA
	•	MSBF or NCLOK Probability Clock No.	27 28 29 30 31 32 33 34 38 36 37 38	1000	1/000	002 D 0001	03 0 00 00	1/0/0/0	17 D		SMHd	S E 34 PHAS	PHASZ E 33 PHAS	S3 E 33 PHAS		PHAS	300 0 0 0 0	PUNCH CA
		Model Mass or NCLOK Clock No.	27 28 29 30 31 32 33 34 38 36 37 38	1000	1/000/1 5 1 000/1	11002 D 0001	03 0 00 00	10004 10 10001	PLIT D 0001		SMHd	HAS11 E 1 34 PHAS	HASZ E 33 PHAS	HASS E 33 PHAS		PHAS	71300 0	PUNCH CA
		Model Mass or NCLOK Clock No.	27 28 29 30 31 32 33 34 38 36 37 38	1000	0 5/100/1 5 1 000/1	c 7/002 D 0001	1 J/1003 D 00001	1 51004 0 1000	c SPLIT D		SMHd	O PHAS I E BHAS	I PHASZ E 33 PHAS	PHASS E 33 PHAS		PHAS	71300 0	
		MSBF or NCLOK	27 28 29 30 31 32 33 34 38 36 37 38	1000	00 5/00/1 5 000/1	c 7/002 D 0001	P1 J1003 D 0001	41 Jul 04 D	c SPLIT D		SMHd	0 PHAS 1 E 134 PHAS	ON PHASZ E 33 PHAS	PHASS E 33 PHAS		PHAS	71300 0	
	•	Model Mass or NCLOK Clock No.	27 28 29 30 31 32 33 34 38 36 37 38	1000	0000 7/1001 5 0001	8WAIC 510002 D 0001	EP1 J/1003 D 0001	5/4/1 5/10/04 D	WARC SPLIT D OOO!		SMHd	10000 PHAS 11 E 1 34 PHAS	IDOU BHASE E 33 PHAS	1002 PHASS E 33 PHAS		PHAS	71300 0	
		W UC Next Nede 9 Probability Clock No.	27 28 29 30 31 32 33 34 38 36 37 38	1000	00000 5/1000/1 5/1000/1	T MMAIC 5/1002 D 0001	PREP 1 1/003 D 0001	WASHII 511004 D 1 10001	T W M A C S P L I T D		SMHd	7/1000 PHAS 11 E 34 PHAS	TIIOOII PHASZ E 33 PHAS	711002 PHASS E 33 PHAS		PHAS	71300 0	
		MSBF or NCLOK	27 28 29 30 31 32 33 34 38 36 37 38	1000	0000 7/1001 5 0001	8WAIC 510002 D 0001	EP1 J/1003 D 0001	5/4/1 5/10/04 D	WARC SPLIT D OOO!		SMHd	10000 PHAS 11 E 1 34 PHAS	IDOU BHASE E 33 PHAS	1002 PHASS E 33 PHAS		PHAS		
		ASSF or NCLOK No.	27 28 29 30 31 32 33 34 38 36 37 38	1000	0 20000 10000 1000 1 5 0	1 57 8WAC 51002 D 0001	2 JPREPUL J/1003 D 1 10001	JWASH11 J1004 D 1 0001	JT WARE SPLIT D 0001		SMHd	7 PT/1000 PHAS/1 E . 34 PHAS	T PT 1001 PHASZ E DHAS	7 P7 11002 PHASS E 33 PHAS		PHAS	P00300 J1300 D	
		ASSF or NCLOK No.	27 28 29 30 31 32 33 34 38 36 37 38	1000	00 20000 151001 5 0001	01 JTBWAC J1002 D 0001	02 JPREP1 J1003 D 10001	03 JWASHI JIOO4 D 0001	04 JIMMAC SPLIT D 0001		SMHd	IT PT/1000 PHAS 1 E 34 PHAS	IT PTIOOII PHASZ E I 33 PHAS	IT PT 1002 PHAS3 E 33 PHAS		PHAS	P00300 J1300 D	
R		ASSF or NCLOK No.	27 28 29 30 31 32 33 34 38 36 37 38	1000	0 20000 10000 1000 1 5 0	1 57 8WAC 51002 D 0001	2 JPREPUL J/1003 D 1 10001	JWASH11 J1004 D 1 0001	JT WARE SPLIT D 0001		SMHd	LIT PT1000 PHAS11 E 34 PHAS	IT PTIOOII PHASZ E I 33 PHAS	PLIT PT 1002 PHASS E 33 PHAS		PHAS	P00300 J1300 D	
No. 2		ASSF or NCLOK No.	27 28 29 30 31 32 33 34 38 36 37 38	1000	00 20000 151001 5 0001	01 JTBWAC J1002 D 0001	02 JPREP1 J1003 D 10001	03 JWASHI JIOO4 D 0001	04 JIMMAC SPLIT D 0001		SMHd	IT PT/1000 PHAS 1 E 34 PHAS	T PT 1001 PHASZ E DHAS	7 P7 11002 PHASS E 33 PHAS		PHAS	71300 0	PUNCH CA very story of the folia wal at uses
JT No. 2		ASSF or NCLOK No.	27 28 29 30 31 32 33 34 38 36 37 38	1000	1000 20000 31.001 5	11001 JTBWAC J1002 D 0001	02 JPREP1 J1003 D 10001	03 JWASHI JIOO4 D 0001	1004 JTBMAC SPLIT D 10001		SMHd	LIT PT1000 PHAS11 E 34 PHAS	IT PTIOOI PHASS E SUBSIDHAS	PLIT PT 1002 PHASS E 33 PHAS		PHAS	P00300 J1300 D	PRYOUS EDITIONS OF THIS FORM WILL RE USED UNTIL STOCK IS EDIMUSTED.
4PUT No. 2		ASSF or NCLOK No.	0 11 12 13 14 15 16 17 16 17 10 20 21 22 28 24 25 26 27 28 29 30 31 32 32 33 34 36 35 36 37 38	1000	1000 20000 31.001 5	11001 JTBWAC J1002 D 0001	02 JPREP1 J1003 D 10001	03 JWASHI JIOO4 D 0001	1004 JTBMAC SPLIT D 10001		SMHd	LIT PT1000 PHAS11 E 34 PHAS	IT PTIOOI PHASS E SUBSIDHAS	PLIT PT 1002 PHASS E 33 PHAS		PHAS	P00300 J1300 D	PRYOUS EDITIONS OF THIS FORM WILL RE USED UNTIL STOCK IS EDIMUSTED.
INPUT No. 2		ASSF or NCLOK No.	4 8 6 7 8 9 10 11 12 13 14 16 17 16 17 18 19 20 21 22 22 24 28 26 27 28 29 30 31 32 33 34 38 36 37 38	1000	1000 20000 31.001 5	11001 JTBWAC J1002 D 0001	02 JPREP1 J1003 D 10001	03 JWASHI JIOO4 D 0001	1004 JTBMAC SPLIT D 10001		SMHd	LIT PT1000 PHAS11 E 34 PHAS	IT PTIOOI PHASS E SUBSIDHAS	PLIT PT 1002 PHASS E 33 PHAS		PHAS	P00300 J1300 D	PRYOUS EDITIONS OF THIS FORW WILL RE USED UNIT, STOCK IS EDIMANTED.
INPUT No. 2		ASSF or NCLOK No.	3 4 5 6 7 6 9 10 11 12 13 14 14 18 14 17 16 19 20 21 22 22 34 28 34 28 39 30 31 32 34 35 35 34 35 35 35 35 35	1000	1000 20000 31.001 5	11001 JTBWAC J1002 D 0001	02 JPREP1 J1003 D 0001	03 JWASHI JIOO4 D 0001	1004 JTBMAC SPLIT D 10001		SMHd	LIT PT1000 PHAS11 E 34 PHAS	IT PTIOOI PHASS E SUBSIDHAS	PLIT PT 1002 PHASS E 33 PHAS		PHAS	P00300 J1300 D	

Figure 33. Phase network example,

M															
	gitaunitno							I	I	\bot			oxdot		I
				↓_		1_	↓_	╁	╀		 _	1			I
	1 1 1	N A BC / AG	4_	╄┈	 	-	-	┼	+	-	↓	 	╀	ļ	1
7			:	 	 	├	 	┼	+-			 	╙	ــــ	1
		4	 	┼	┼	⊢	┼	┿	+-		┼	 	-	╄	+
			 	-		₩	┼	┼	+	+	 	+-	┼	╄	+
		+	-	┼	 	├-	╁	┼	+-		┿	├	╄	-	+
		+;	+	+	1	-	┼	+-	╫	+-	+	┼	╁	╄	╀
	į	67 44 40 70 71 73	+	+-	+-	├	┼	 	╁	+-	1.	┼	┼—	┼—	+
	204 / 254	4	:	╁	-	┼	\vdash	┼─	╁	+-	┼	 	╁	┿	┿
	ÿ	ì	+-	╂~~	7	 	├─	┼	┿		-	┼	┼	┼-	┿
		H	-	├	8	 	╁	┼	╁─	+	┿	┼	1	┼	+
		#	+		7		 	┼┈	+7	+-	╁	+	╌	┼	+
		1	+	-	 ``	1	╁	╫	╁┼	+	+	 	┼	┼~	┿
		100	┼─	1.7	 	ত	├	├─	╁	N S	0	┼──	┼	┼~	┿
	ë	۲	×	 	 	Ž	┼─	├	╂╅	+2	×	├──	 	╂	╁
		3	ပ	+-	0	F	 	┼	H	+	7	 	\vdash	╀-	╀
٠.	AFCC / AGE	1	4	F	3	•	_	1	++	া ত	7		-	┼~	╁
	Ĭ	20 19	नि	il	A	ш	╫	 	┨	+==	7	┼	 .	┼-	╁
	z			ਹ	1	8	1	╁	╁┼	T W	1 =	 	-	+-	┿
		8		¥	-	1		 	+	+=	-		 	+-	┿
		1	0	 	-	ब्द	8		⇈	14	ಎ	 	10	 	╁
		Ē		7	a		>	-	††	+	×	_	×	1	†
	•	26 57	m	E		S	N	<u> </u>	H	-0	m		7	 	+
	AFC / AG	悖	7	Z	8	Ž	3	 	+	+-	7	 	7	 	+
	. *	12.	5	Z	7	3	'n	_	+	1	7		7	 	t
	2		1	₹	=	4	m	 	††	+5	=	-	7	 	t
		2		1		4	 -	 	††	T W	H		'``	 	+
	edyl . Isio	1 5	1	W	7	E	7	—	††	12	7		7	 	t
- 7		8	6	2	76	3	0	_	Н	TW	6		6	\vdash	۲
	* \$	8	R	17.	त		K		Н	+	N	_	3	 - -	十
	>	3	1	3		3	_·· ``	 	\vdash	3	· · ·	_	<u> </u>	_	t
		2	0		2		0		++	+	٥	_	K		
	, î		-	W	3	E	3		П	W	-		M	_	t
	HOURS (Tenths)	Ì		~		8		_	H	S			-		
	<u> </u>	3		~		₹		\vdash	1	4			-	_	H
	# 5	3	-	X		H			\vdash	T				_	
•		Q		4	\vdash	۵			\vdash	10					Н
	Ytisoiry	Ŧ	7		त		7	त		T	~	7	ત	4	П
	Type Task	8	3		32		3	3	\sqcap		3	3	3	3	П
	Release	8													П
		38	3	E	Ē	E	Ę	E	7	W	3	ш	Ę	3	1
	<u> </u>		5				S	S	7	8	5				
	U Z	_		5	S	_ \S \			_<			S	S	5	7
	2 2	8	~	A	٧	AS	A	A	Ź	⋖	A	A	Ą	٧	3
	ock.	35 36 37	HA	μА	ΗА	H	HA	H	$\stackrel{\diamond}{\geq}$	I	HA	ЯΑ	Ą	HA	4
	NCLOK Clock No.	3	~	A	٧		A				A	A	Ą	٧	4
	NCLO! Clock	8	HA	μА	ΗА	H	HA	PH		I	HA	PHA	PHAS	HA	\ \ \ \
	•	32 33 34	HA	μА	ΗА	H	HA	H		I	HA	ЯΑ	4 PHA	HA	\ \ \ \
	•	32 33 34	HA	μА	ΗА	H	HA	PH		I	HA	PHA	PHA	PHA	\ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \
•	o illity	30 31 32 33 34	HA	μА	ΗА	H	HA	PH		I	HA	PHA	4 PHA	PHA	\ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \
•	o illity	30 31 32 33 34	HA	μА	PHA	H	HA	PH		I	HA	PHA	4 PHA	PHA	\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\
•	o illity	30 31 32 33 34	HA	μА	ΗА	H	HA	PH		I	HA	PHA	4 PHA	PHA	\\ \\ \\ \\ \\ \\ \\ \\ \\ \\ \\ \\ \\
•	o illity	30 31 32 33 34	PHA	μА	PHA	H	PHA	14 PH		I	PHA	12 PHA	S4 PHA	AH9 91	
	o illity	30 31 32 33 34	HA	PHA	PHA	H d	HA	PH		М	HA	PHA	4 PHA	PHA	4444
	Model MSBF or Probability	25 26 27 28 29 30 31 32 33 34	D PHA	μА	D PHA	H	DHA	14 PH		I	D PHA	12 PHA	A S4 PHA	A 1 6 PHA	\\ \\ \\ \\ \\ \\ \\ \\ \\ \\ \\ \\ \\
	Model MSBF or Probability	25 26 27 28 29 30 31 32 33 34	I D PHA	PHA	2 D PHA	H d	3 D PHA	14 PH		М	PHA	12 PHA	S4 PHA	O A	
	Model MSBF or Probability	25 26 27 28 29 30 31 32 33 34	I D PHA	PHA	2 D PHA	H d	03 D PHA	14 PH		М	15 D PHA	12 PHA	16 A S4 PHA	OO A 16 PHA	\ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \
	Model MSBF or Probability	25 26 27 28 29 30 31 32 33 34	I D PHA	PHA	2 D PHA	H d	03 D PHA	14 PH		М	15 D PHA	12 PHA	16 A S4 PHA	OO A 16 PHA	
	Model MSBF or Probability	25 26 27 28 29 30 31 32 33 34	1301 D PHA	PHA	1302 D PHA	H d	1303 D PHA	14 PH		М	1315 D PHA	12 PHA	A S4 PHA	OO A 16 PHA	
	Model MSBF or Probability	25 26 27 28 29 30 31 32 33 34	I D PHA	PHA	2 D PHA	H d	03 D PHA	14 PH		М	15 D PHA	12 PHA	16 A S4 PHA	OO A 16 PHA	
· · · · · · · · · · · · · · · · · · ·	Model MSBF or Probability	25 26 27 28 29 30 31 32 33 34	1301 D PHA	PHA	1302 D PHA	H d	1303 D PHA	14 PH		М	1315 D PHA	12 PHA	16 A S4 PHA	O A	
	Model MSBF or Probability	25 26 27 28 29 30 31 32 33 34	J1301 D PHA	PHA	J1302 D PHA	H d	3/303 D PHA	A		М	J1315 D PHA	N N N N N N N N N N N N N N N N N N N	7/3/6 A 54 PHA	OO A 16 PHA	
	Model MSBF or Probability	25 26 27 28 29 30 31 32 33 34	1 J1301 D PHA	PHA	J1302 D PHA	H d	03 5/303 D PHA	2		М	J1315 D PHA	7 A A PHA	16 A S4 PHA	OO A 16 PHA	\\ \\ \\ \\ \\ \\ \\ \\ \\ \\ \\ \\ \\
	Model MSBF or Probability	25 26 27 28 29 30 31 32 33 34	01 J1301 D PHA	PHA	J1302 D PHA	H d	03 5/303 D PHA	2		М	J1315 D PHA	07 A PHA	18 J1316 A S4 PHA	SDCAGO A 16 PHA	
	Model MSBF or Probability	25 26 27 28 29 30 31 32 33 34	01 J1301 D PHA	PHA	J1302 D PHA	H d	03 5/303 D PHA	2		М	J1315 D PHA	07 A PHA	18 J1316 A S4 PHA	SDCAGO A 16 PHA	
	Model MSBF or Probability	25 26 27 28 29 30 31 32 33 34	01 J1301 D PHA	PHA	J1302 D PHA	H d	03 5/303 D PHA	2		М	J1315 D PHA	07 A PHA	18 J1316 A S4 PHA	BP SDGAOO A 16 PHA	
	Model MSBF or Probability	25 26 27 28 29 30 31 32 33 34	01 J1301 D PHA	PHA	J1302 D PHA	H d	03 5/303 D PHA	A		М	J1315 D PHA	NSO 07 A PHA	18 J1316 A S4 PHA	HOP Speao A 16 PHA	
	Model MSBF or Probability	25 26 27 28 29 30 31 32 33 34	1 J1301 D PHA	PHA	1302 D PHA	H d	P00303 51303 D PHA	LINSO12 A 14 PH		М	1315 D PHA	UNSOOT A 12 PHA	4 1 1 2 1 2 1 2 1 2 1 2 1 2 1 2 1 2 1 2	SHBP SDGAOO A 16 PHA	
	Model MSBF or Probability	25 26 27 28 29 30 31 32 33 34	P00301 J1301 D PHA	PHA	Poosloz JISOZ D PHA	H d	P00303 51303 D PHA	LINSO12 A 14 PH		М	P00309 J1315 D	UNSOOT A 12 PHA	4 1 1 2 1 2 1 2 1 2 1 2 1 2 1 2 1 2 1 2	SHBP SDGAOO A 16 PHA	
	Model MSBF or Probability	25 26 27 28 29 30 31 32 33 34	P00301 J1301 D PHA	PHA	Poosloz JISOZ D PHA	H d	P00303 51303 D PHA	LINSO12 A 14 PH		М	P00309 J1315 D	15 UNSO 07 A A 12 PHA	4 1 1 2 1 2 1 2 1 2 1 2 1 2 1 2 1 2 1 2	16 SHBP SDGAOO A 16 PHA	
	Model MSBF or Probability	25 26 27 28 29 30 31 32 33 34	P00301 J1301 D PHA	PHA	Poosloz JISOZ D PHA	H d	P00303 51303 D PHA	LINSO12 A 14 PH		М	P00309 J1315 D	15 UNSO 07 A A 12 PHA	4 1 1 2 1 2 1 2 1 2 1 2 1 2 1 2 1 2 1 2	16 SHBP SDGAOO A 16 PHA	
	Model MSBF or Probability	25 26 27 28 29 30 31 32 33 34	1300 P003011 J1301 D PHA	PHA	1301 P00302 J1302 D PHA	H d	03 5/303 D PHA	1303 UNSO12 A 114 PH		М	1302 P00309 J1315 D	UNSOOT A 12 PHA	18 J1316 A S4 PHA	SHBP SDGAOO A 16 PHA	
•	Model MSBF or Probability	25 26 27 28 29 30 31 32 33 34	1300 P003011 J1301 D PHA	PHA	1301 P00302 J1302 D PHA	H d	P00303 51303 D PHA	1303 UNSO12 A 114 PH		М	P00309 J1315 D	15 UNSO 07 A A 12 PHA	4 1 1 2 1 2 1 2 1 2 1 2 1 2 1 2 1 2 1 2	16 SHBP SDGAOO A 16 PHA	
•	Model MSBF or Probability	5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 28 24 25 25 22 29 20 31 22 30	P00301 J1301 D PHA	PHA	301 P00302 J1302 D	H d	1302 P00303 J1303 D PHA	303 UNSO12 A 14 PH		М	1302 P00309 J1315 D	1315 UMSO 07 A A 12 PHA	1315 WMS018 J1316 A S4 PHA	1316 SHBP SDGAOO A 16 PHA	
KTENDED FORM 11	Model MSBF or Probability	30 31 32 33 34	1300 P003011 J1301 D PHA	PHA	1301 P00302 J1302 D PHA	H d	1302 P00303 J1303 D PHA	1303 UNSO12 A 114 PH		М	1302 P00309 J1315 D	1315 UMSO 07 A A 12 PHA	1315 WMS018 J1316 A S4 PHA	1316 SHBP SDGAOO A 16 PHA	

INPUT No. 2 EXTENDED FORM 11

460

PUNCH CARD TRANSCRIPT

Figure 33. Phase network example (continued).

AF PORM 1530

of crews to the flight line. This is not necessary for phase since most of the corrective work is generally done by the same dispatched crew in conjunction with their inspection. The corrective maintenance task is shown with an A probability following the inspection. Most phase repairs are on aircraft fixes, but if something does go to the shop, a SHOP dummy task is shown with another A probability.

Assuming all the subsystems listed for the 424X0 fuel specialists in Figure 32 are comparable, a corrective action is required every 18 phases. It takes an average 6.4 manhours, which is equivalent to an average 3.2 hours elapsed time by the typical crew of two indicated in the data. If there were a fuels inspection task in each of the three phases, the corrective maintenance task would follow each 424X0 inspection with an A selection mode and .18 probability. Resources would only be listed to define the task in the first of these three entries. If there were no fuels inspection, it would be shown once from the phase entry node, also with an A selection mode and .18 probability. In this instance, the only fuels inspection is in Phase 3. The corrective task is networked following this task. Since it can never occur on Phases 1 and 2, the appropriate A selection mode parameter is the average number of actions in three phases, or three times .18. Figure 33 shows the task with a .54 probability of occurrence in the third phase.

Most phase corrective actions are on aircraft repairs. The data bank run shows only one in-phase removal rate by 424X0s that is even marginally significant. They reported seven in-phase unscheduled removal actions against subsystem 46B in the 14,386 sortie sample. This is .14 of the 47 total 424X0 in-phase R and M corrective actions. Figure 33 shows a dummy shop task with an A selection mode probability of .14 going into the 46A shop entry node in the unscheduled maintenance networks. The same tasks apply for shop processing regardless of where the item was removed from the aircraft. Scheduled removals in phase that are processed in-shop are networked in a similar manner. The ejection seat an filters are typical examples.

Corrective actions by 431Pls are generally minor repair of seals, gaskets, etc., and are an inherent part of their disassembly, inspection, and reassembly tasks. It is probably more accurate to get a total job estimate from experienced technicians that covers all inspection and repair than to try and break out corrective work with MDC data.

Other Scheduled Inspections and Time Change Items

The lists of 04 inspections in the work unit code manuals, the data bank runs on these inspections, and the data bank runs for scheduled removals should be carefully reviewed for all comparable aircraft. A list of inspections and time changes applicable to the new aircraft must be developed, using these data as a starting point but adjusting for differences in design and maintenance concepts. Contractor recommendations can be helpful if available, but should be verified by Air Force engineers and technicians.

Inspections that occur at calendar intervals may be scheduled on the Form 20s. Examples are the 45-day corrossion wash for fighter aircraft of the annual teardown and inspection of the M-61 gatling gun on the A7D. Only major inspection that tie up an aircraft for half a day or more should be handled this way. The network does not include a failure clock. It is entered through a dummy mission in the main network, in the same manner as shown above for phase.

There are many other scheduled inspections that are done in conjunction with postflight when they come due. Section III included an example of gun inspections entered with E probabilities in a main network. This method is cumbersome except where the inspection is only done after certain kinds of missions. The more general way is to use scheduled inspection networks with failure clocks based on the inspection interval. These clocks are only decremented and interrogated on missions going to postflight. Coding is similar to unscheduled maintenance networks except that task type is three, the work unit codes and clock numbers have an S in the last position, and nodes are six digits starting with X. These conventions avoid any unintended duplication of nodes or tasks used in unscheduled maintenance. Two example networks from an A7D model are shown in Figure 34.

Every 50 flight hours the water collection bag on the air conditioner must be emptied. This is done in 100 hour phase and during a postflight, half way between phases. The 422X1 technician must remove the water separater (41AAL) to do this. The whole job is generally coded in MDC as a removal for access. The postflight check is shown in the network as a scheduled check every 36 postflights (100 flying hours at 1.8 sortie length and 50% average successful aircraft turnaround).

The cabin pressure regulator (41BCA) and pressure valve (41BCC) are replaced every four years (every 550 sorties at peacetime flying rates). The job requires radar swing-out by 322X1, access removal of armor plate (11AAL) by a 431X1 crew chief, and a pressure check after the components are replaced.

The postflight clock values on scheduled tasks must be adjusted when scenario assumptions are changed.

VI. BUILDING A DATA BASE

Data Base Processing

The steps in building simulation input files are shown in Figure 35. In step 1, the extended Forms 11 are keypunched, and after careful checking to correct coding or key punch errors, they are run into a computer file called DBASE. These cards and the corresponding DBASE file are the basic maintenance data base for a system, with all the data pertaining to a single

			_	_		_						$\neg \tau$		1			1	
- 40		တုန	4	-	-+		-+	+	-+	-+	+	-+	-	_		-	=	
		w .	4		-+	-+	-+	-	-+	_	_	\neg	_	_				
		3	+			-	_			\neg	_							
		Ų;	+		+	\dashv	-1	$\neg \uparrow$	-		\neg							
		¥:	+		_	_	_	一寸										
		Ž,	†	_				\Box										
		1	: [_							-	
			ग										_					
		9	${ m I}$					_				+			 	├	-	7
		N.	<u>:I</u>	\Box			_		_				\rightarrow		 -	-	 	l
		쳁	il.	_		_				-+		-+			├─		-	
		< 1	4		_		∤					-+			┢╾	├	_	1
		Z:	4	_				-								_	t-	ŝ
		-13	4	×			-						-+	-	_	-	 	1
		8	+	S S	\dashv	1	읜	\dashv	-		1							ž
		3	;	표			-		-	一	_] 🛊
		AFSC / AGE	1	ਹ	_		ш		$\neg \neg$	$\neg \neg$		7						Ì
		₹	+	7	\neg			_	\neg									AFLC-WPAFB-JAN 74 500
		N AFSC / AGE	3	7			7								└	<u> </u>	ـــ	↓ `
				7			۸								ऻ—	ļ	┼	ł
	-		2	<u>S</u>		>	>	[_		<u>.</u>			<u> </u>		-	\vdash	1
		AFSC / AGE	1	ಲ		X	REGS		×	×	۱X	2 X			-	 -	+	t
		ان	4			<u> </u>	۳		3	22	22	2.			1		t^-	1
		5	4	쏲		42	끴			32	4				 	t^-	1	1
		_)c 00 00 12	TER		7	-		24	5	24	24			\vdash	T	1	1
		Z	25	듸		17	<u>.,</u>		-``	-``	•, 1			_				1
	44X1 -1	اما	5	MA		7	55	-	7	7	7	7	ಬ	_				I
			핡			6	ш		9	9	6	6	0			\Box		1
		Š	4 20	A		3	PR		7	7	7	7			<u> </u>	 	↓	4
				DND			4					ليا	_		├			4
			<u>, </u>	Ø		7			7	00	5	0	0		ـ	├ ─	├	┨
	4	3	3	c		N	H	!		_	ス	3	4		┢	├ -	┼	┪.
	Sellon	(Tonths)	2 2 2				н	_	L	L			7	_	╁	├ -	+-	ĬĒ
	Ĭ	3	3	R			18				—	-	-		┼	┼	┼~	녆
				AI			A	-			-	-			+	+	+-	¥
	Yiiyo	125	41	_		_	و	_			_	=	_		+-	+-	\top	1 ≅
	Aspl ec	X	\$		3	3		3	m	3	3	3	3			1]2
	9109		2					<u> </u>	_					Ĺ	Ι			<u> </u>
	91D9	-8	8	S			S	S	S	S	S	8	5				E	15
		•¥	30	A S	AS :	A S		S	S	cs	ر د د	c S	2					S HOND
		•¥	30		s	5	808			S	. 8	8	865					PUNCH CARD TRANSCRIPT
		•¥	30	IAA	IAAS	IAAS	1 BC	1 BCS	1 Bcs	1 Bcs	1 B C S	1865	1 BC					PUNCH CA
	SED YOU	Clock No.	34 35 36 37 38 39	A	AAS	A S		S	S	cs	ر د د	c S	2					PUNCH CA
		Clock No.	33 34 35 36 37 38 39	IAA	4 I A AS	IAAS	1 BC	413cS	1 Bcs	1 Bcs	1 B C S	1865	1 BC					PUNCH CA
		Clock No.	33 34 35 36 37 38 39	IAA	6 4 1 A AS	IAAS	1 BC	0 41365	1 Bcs	1 Bcs	1 B C S	1865	1 BC					PUNCH CA
	Š	Clock No.	33 34 35 36 37 38 39	IAA	4 I A AS	IAAS	1 BC	50 41 BCS	1 Bcs	1 Bcs	1 B C S	1865	1 BC					PUNCH CA
	X X X	Clock No.	33 34 35 36 37 38 39	IAA	6 4 1 A AS	IAAS	1 BC	0 41365	1 Bcs	1 Bcs	1 B C S	1865	1 BC					PUNCH CA
·	X X X	Clock No.	33 34 35 36 37 38 39	IAA	6 4 1 A AS	IAAS	1 BC	50 41 BCS	1 Bcs	1 Bcs	1 B C S	1865	1 BC					PUNCH CA
	NO JASE	Probability . Clock No.	27 28 29 30 31 32 33 34 35 36 37 38 39	IAA	36 41 AAS	41 AAS	1 BC	550 413cS	41865	4 / Bcs	41BCS	41868	4180					PUNCH CA
	X X X	9 Probability . Clock No. 2	26 27 28 29 30 31 32 33 34 35 36 37 38 39	4 - A	6 4 1 A AS	IAAS	4180	F 550 413cS	1 Bcs	1 Bcs	1 B C S	41868	1 BC					PUNCH CA
	NO JASE	9 Probability . Clock No. 2	26 27 28 29 30 31 32 33 34 35 36 37 38 39	4 - A	36 41 AAS	41 AAS	1 BC	F 550 413cS	D 418cs	A 1 BC S	D 41865	4 1 BCS	D 418c					PUNCH CA
	NO JASE	9 Probability . Clock No. 2	26 27 28 29 30 31 32 33 34 35 36 37 38 39	4 - A	1 F 36 41 AAS	41 AAS	4180	1 F 550 413cS	2 D 4186S	3 D 4 1 BC S	D 41865	25 D 41 BCS	D 418c					PUNCH CA
	NO JASE	9 Probability . Clock No. 2	26 27 28 29 30 31 32 33 34 35 36 37 38 39	4 - A	AI F 36 AIAS	41 AAS	4180	C F 5.50 41 BCS	C2 D 418CS	3 D 4 1 BC S	D 41865	25 D 41 BCS	D 418c					PUNCH CA
	NO JASE	9 Probability . Clock No. 2	26 27 28 29 30 31 32 33 34 35 36 37 38 39	4 - A	1 F 36 41 AAS	41 AAS	4180	1 F 550 413cS	1 BC2 D 41 BCS	1 BC3 D 4 1 BCS	1 B C 4 D 4 1 B C S	18C5 D 41BCS	D 418c					PUNCH CA
	NO JASE	9 Probability . Clock No. 2	26 27 28 29 30 31 32 33 34 35 36 37 38 39	4 - A	IAAI F 36 41 AAS	D	4180	1 BC 1 F 550 41 BCS	1 BC2 D 41 BCS	1 BC3 D 4 1 BCS	D 1 B C 4 D 4 1 B C S	18C5 D 41BCS	D 418c					PUNCH CA
	NO JASE	9 Probability . Clock No. 2	26 27 28 29 30 31 32 33 34 35 36 37 38 39	4 - A	IAAI F 36 41 AAS	D	4180	C F 5.50 41 BCS	D1862 D 41868	D1 BC3 D 41 BCS	D 18 C4 D 41 BCS	D 18C5 D	D 418c					PUNCH CA
	NO JASE	9 Probability . Clock No. 2	26 27 28 29 30 31 32 33 34 35 36 37 38 39	4 - A	XDIAAI F 36 41 AAS	D	H 418C	D18C1 F 550 418CS	X D1 BC2 D 41 BCS	XD13C3 D 418CS	XD 18C4 D 418CS	XD18C5 D	D 418c					PUNCH CA
	NO JASE	9 Probability . Clock No. 2	26 27 28 29 30 31 32 33 34 35 36 37 38 39	4 - A	XDIAAI F 36 41 AAS	D	H 418C	5 XD1 BC 1 F 550 41 BC 5	S X DI BC2 D 41 BCS	S XD1 BC3 D 4 1 BCS	S XD 1 B C 4 D 4 1 B C 5	5 XD18C5 D	S 418c					
	NO JASE	9 Probability . Clock No. 2	26 27 28 29 30 31 32 33 34 35 36 37 38 39	4 - A	AS XDIAAI F 36 41 AAS	AS D AI AAS	# 41.8 C	CS XD1.BC1 F 550 41.BCS	15 x D1 BC2 D 41 BCS	25 x D 1 BC3 D 4 1 BC S	S XD 1 B C 4 D 4 1 B C 5	5 XD18C5 D	S 418c					
	NO JASE	9 Probability . Clock No. 2	26 27 28 29 30 31 32 33 34 35 36 37 38 39	4 - A	XDIAAI F 36 41 AAS	A A I I A A S	# 41.8 C	BCS XD1.BC1 F 550 41 BCS	15 x D1 BC2 D 41 BCS	825 XD1 BC3 D 41 BCS	BCS XD18C4 D	5 XD18C5 D	25 D 418c					
	NO JASE	9 Probability . Clock No. 2	26 27 28 29 30 31 32 33 34 35 36 37 38 39	4 - A	I AAS XDIAAI F 36 41 AAS	D A I A A S	# 418C	18CS XD18C1 F 550 418CS	1815 X D1 BC 2 D	1825 XD13C3 D 418CS	18CS XD 18C4 D 41 8CS	18 15 XD 18 C 5 D	1 B2S 41 BC	<u> </u>				
	• Pow 1	9 Probability . Clock No. 2	26 27 28 29 30 31 32 33 34 35 36 37 38 39	4 - A	41 AAS XDIAAI F 36 41 AAS	A D A I A A S	# 4-18C	BCS XD1.BC1 F 550 41 BCS	41 B1S X D1 BC2 D 41 BCS	411825 XD118C3 D 418CS	41 BCS XD1 BC4 D 41 BCS	41815 XD18C5 D	41 82S D 41 8C					
	• Pow 1	9 Probability . Clock No. 2	26 27 28 29 30 31 32 33 34 35 36 37 38 39	4 - A	I AAS XDIAAI F 36 41 AAS	D A I A A S	# 4-18C	418CS XD18C1 F 550 418CS	1815 X D1 BC 2 D	411825 XD118C3 D 418CS	41 BCS XD1 BC4 D 41 BCS	V41 B15 XD18C5 D	VA1825					
	• Pow 1	9 Probability . Clock No. 2	26 27 28 29 30 31 32 33 34 35 36 37 38 39	4 - A	41 AAS XDIAAI F 36 41 AAS	VA 1 A AS	# 4 - 8 C	6 F4 1 BC 5 F 550 41 BC 5	1 x4 1 B 1 S x D 1 B C 2 D 4 1 B C S	2 X411825 XD118C3 D 4118CS	2 R41 BCS XD1 BC4 D 41 BCS	4 VA 1.B.15 XD 18CS D	S V4182S					
	• Pow 1	9 Probability . Clock No. 2	26 27 28 29 30 31 32 33 34 35 36 37 38 39	4 - A	A DEFINATE XDINABILE 36 ALLAAS	A I VA I A A S	# 4-8C	6 F4 1 BC 5 F 550 41 BC 5	1 x4 1 B 1 S x D 1 B C 2 D 4 1 B C S	C2 X411825 XD11BC3 D	2 R41 BCS XD1 BC4 D 41 BCS	C4 VA 18 15 XD 18 C5 D	CS V411825					
	• Pow 1	9 Probability . Clock No. 2	26 27 28 29 30 31 32 33 34 35 36 37 38 39	4 - A	O FALLAAS XDIAAI F 36 41 AAS	A I VA I A A S	# 41 8C	F4 1 8 C S X D 1 8 C 1 F 5 5 10 4 1 3 C S	1 x4 1 B 1 S x D 1 B C 2 D 4 1 B C S	C2 X411825 XD11BC3 D	2 R41 BCS XD1 BC4 D 41 BCS	C4 VA 18 15 XD 18 C5 D	8 c S V 4 1 B 2 S 1 1 B C					
	• Pow 1	9 Probability . Clock No. 2	26 27 28 29 30 31 32 33 34 35 36 37 38 39	4 - A	1 A A O F A I A A S XD I A A I F 36 4 1 A A S	DI VALIAAS	A 8C	1 8C 0 F4 1 8C 5 XD 1 8C 1 F 550 41 8C 5	18C1 X41815 XD18C2 D 418C5	18/02 X41/825 XD1/803 D	1 BC3 R4118C5 XD118C4 D	1 BC 4 VA 1 B 1 S X D 1 B C S D	18CS VA182S					PENCH CA PERSONS FOR INSTANTOR WILL RE USED WHIT. STOCK IS DOWNSTED.
	• Pow 1	9 Probability . Clock No. 2	26 27 28 29 30 31 32 33 34 35 36 37 38 39	4 - A	DIAAO FAIDAS XDIAAI F 36 41 AAS	DI AAII VAIAAS	# # # # # # # # # # # # # # # # # # #	DI BC F4 BC F 550 41 BC	DIBCII X411 B15 X D1 BC2 D 41 BC5	D. B.C.2 X4 1 B.Z.5 XD 1 B.C.3 D 4 1 B.C.S	D. 18C3 R4118C5 XD118C4 D	1 BC 4 VA 1 B 1 S X D 1 B C S D	18CS VA182S					PREVIOUS ESTIMATED. UNIT. STOCK IS EDMANSTED.
	• Pow 1	9 Probability . Clock No. 2	5 6 7 8 9 10 11 12 13 16 13 16 19 10 10 21 22 22 24 25 36 27 28 29 30 31 22 39 34 35 36 37 38 39	4 - A	1 A A O F A I A A S XD I A A I F 36 4 1 A A S	DI AAII VAIAAS	# # # # # # # # # # # # # # # # # # #	1 8C 0 F4 1 8C 5 XD 1 8C 1 F 550 41 8C 5	DIBCII X411 B15 X D1 BC2 D 41 BC5	D. B.C.2 X4 1 B.Z.5 XD 1 B.C.3 D 4 1 B.C.S	D. 18C3 R4118C5 XD118C4 D	1 BC 4 VA 1 B 1 S X D 1 B C S D	18CS V4182S					PREVIOUS ESTIMATED. UNIT. STOCK IS EDMANSTED.
	• Pow 1	9 Probability . Clock No. 2	4 5 6 7 8 9 10 11 12 13 14 15 19 16 17 18 19 20 21 22 28 24 25 26 27 28 27 28 29 30 31 22 39 34 35 36 37 38 39	4 BAA	DIAAO FAIDAS XDIAAI F 36 41 AAS	DI AAII VAIAAS	# # # # # # # # # # # # # # # # # # #	DI BC F4 BC F 550 41 BC	DIBCII X411 B15 X D1 BC2 D 41 BC5	D. B.C.2 X4 1 B.Z.5 XD 1 B.C.3 D 4 1 B.C.S	D. 18C3 R4118C5 XD118C4 D	1 BC 4 VA 1 B 1 S X D 1 B C S D	18CS VA182S					PREVIOUS ESTIMATED. UNIT. STOCK IS EDMANSTED.
	• Pow 1	9 Probability . Clock No. 2	3 4 5 7 8 9 10 11 12 13 14 13 14 17 18 19 20 21 22 24 25 26 27 28 27 28 27 38 33 34 35 35 36 37 38 39	4 A A	DIAAO FAIDAS XDIAAI F 36 41 AAS	DI AAII VAIAAS	# # # # # # # # # # # # # # # # # # #	DI BC F4 BC F 550 41 BC	DIBCII X411 B15 X D1 BC2 D 41 BC5	D. B.C.2 X4 1 B.Z.5 XD 1 B.C.3 D 4 1 B.C.S	D. 18C3 R4118C5 XD118C4 D	1 BC 4 VA 1 B 1 S X D 1 B C S D	18CS VA182S					PREVIOUS ESTIMATED. UNIT. STOCK IS EDMANSTED.
	• Pow 1	9 Probability . Clock No. 2	4 5 6 7 8 9 10 11 12 13 14 15 19 16 17 18 19 20 21 22 28 24 25 26 27 28 27 28 29 30 31 22 39 34 35 36 37 38 39	4 A A	DIAAO FAIDAS XDIAAI F 36 41 AAS	DI AAII VAIAAS	# # # # # # # # # # # # # # # # # # #	DI BC F4 BC F 550 41 BC	DIBCII X411 B15 X D1 BC2 D 41 BC5	D. B.C.2 X4 1 B.Z.5 XD 1 B.C.3 D 4 1 B.C.S	D. 18C3 R4118C5 XD118C4 D	1 BC 4 VA 1 B 1 S X D 1 B C S D	18CS VA182S					

Figure 34. Scheduled maintenance examples,

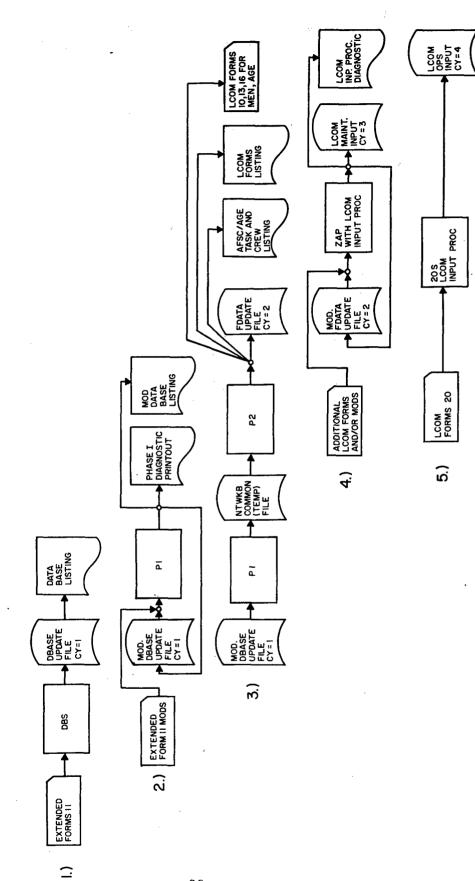


Figure 35. Five steps in processing a simulation data base.

task contained in one record. Once on file they can be readily updated using either a computer terminal or the update procedure described in this section. The basic card deck should still be maintained and kept up to date as a control and backup even though faster computer update methods are used. After the extended Form 11 card deck and DBASE file listing has been checked again and all coding and keypunch errors identified, the corrections are run through the first part of the Phase I program. This is step 2 on Figure 35. The P1 program provides a number of useful diagnostics which may detect additional errors. The procedure of updating the deck and checking diagnostics is repeated until a clean result is obtained.

In step 3 the corrected DBASE file is run through both parts of the Phase I program; programs P1 and P2 translate the extended Form 11 file into LCOM formats and place the translated data an update file called FDATA. P2 also prints out resource data needed to make further additions to the FDATA File.

In step 4 the FDATA file, along with certain additional LCOM input cards and any corrections, is run through the LCOM input processor program. This ZAP run sets up the maintenance data input file for simulation and/or provides further diagnostics. The process of correcting the file, rerunning, and rechecking diagnostics is repeated again until a clean run and output file is obtained. The last step is to run the operations data through the LCOM input processor and check the resulting output file. The form 20 deck is corrected and the process reported until a clean set of operations data is on file.

The programs used in these runs are maintained on "permanent" CDC 6600 system disk files at the ASD Computer Center. They are accessed by the DBS, P1, P2, ZAP, and 206 control decks referred to in Figure 35. Authorized users can obtain these decks from a designated programmer in the ASD Computer Center. The first card of each deck will contain the deck name in Columns 3-4 or 3-5. The user must also establish a CDC 6600 permanent file location name. This provides for the five cycles in disk storage needed to process the data base and simulation output. The following sections explain the procedures for steps 1 through 5 in detail.

Debugging with Phase I

Ž

The extended Form 11 data base may be set up on either an UPDATE permanent file and updated with change cards or be set up on an ordinary permanent file and updated directly from a remote terminal keyboard using EDIT mode. A slightly different version of the Pl deck is required in each case. The procedure described in this section presumes that the UPDATE mode for processing change cards is used.

Step 1 is to put the extended Form 11 card deck on file using the DBS control deck. The user must enter his file location and Cy=1 on the "catalog" control card. One run parameter card is also prepared for the entire run. The format is:

Cols 1-3 Cols 4-6	Any three digit number (used to identify run) Aircraft (e.g., A-10)
Cols 7-12	Any six digit number (used for run data)
Cols 14-17	X001
Cols 23-24	Pre-flight Decrement (e.g., 04 to decrement .04 sortie)
Co1s 29-30	Post-flight Decrement (e.g., 96 to decrement .96 sortie)
Co1 32	"2" for constant time distributions, "1" for time
	distributions and standard deviations specified on extended Forms 11
Cols 34-36	Multiplier on G probabilities (e.g., 010 to increase the probability of a multiple occurrence 10 times over chance). The multiplier can be used to show the impact of sympathetic failure and/or reduce simulation
	run time.
Co1s 38-39	Average time to get resupply from depot in days after NRTS action.

This run parameter card is entered immediately after the deck card, followed by all the extended Form 11 cards in this sequence:

main networks
phase networks
scheduled maintenance networks
corrective maintenance networks in ascending order of clock number

All networks must include appropriate header cards. Carefully check an 80 - 80 listing of the deck to be sure all data and keypunch errors are corrected before entering it into the computer. The DBS run will provide a listing showing each record on file and its DBASE identification number for update. Subsequent corrections and additions can be made through CDC 6600 update by referencing these numbers.

In step 2, the P1 test deck is used to obtain a diagnostic of the DBASE file. The attach and catalog cards in the P1 deck must specify the DBASE file location and Cy=1. The *ID card on the first run should specify MOD1.

The program provides the following error checks and warnings:

- a. Data must be in appropriate numeric format. The system will halt and print an error diagnostic if alpha data appears in any column designated as numeric format.
- b. Action and work unit code on a trailer card must match action and work unit code on the preceding card with C in column 80. If it does not, an error is printed and the record is not processed.
- c. Only selection modes A, B, C, D, E, F, G, S, or X are accepted. If selection mode is omitted, or any other letter used, an error message is printed and the record is not processed.

- d. An A, E, F, or G selection mode must have a non-blank MSBMA or probability value indicated or a warning message is printed.
- e. If a record has an F selection mode, work unit code and clock number must match. If not, an error is printed and the record is not processed.
- f. If the input record specifies any time or resources when repeating a previously defined task, the program prints a warning. This usually indicates that the same task name was inadvertently used to define two distinctly different tasks.
- g. If an asterisk is not found in column 39 for a task with action code W, K, or N the program prints a warning. This does not necessarily indicate an error. There are situations where an N, W, or K card should not have the asterisk, such as bench check on return from depot. The message is a warning to double check and be sure that the omission was intentional.
- h. If sequentially encountered E probabilities in the same network segment do not sum to 1.00, the program prints a warning. This is not necessarily an error. If H cards for nomenclature are inserted within a sequence of E probability tasks it will upset the computer's tally and produce this message. However, any time the message appears the preceding E probabilities should be double checked.

When corrections for all the errors have been determined, the correction cards must be keypunched and entered in another run of the P1 program. This time the *ID card number will be MOD2. Each update run must carry a new ID MOD number. CDC 6600 update allows the user to delete and/or replace individual records in the file without having to reenter the entire card deck. This is done with delete control cards. A delete control card is made up as follows:

Co1 1-2 *D

Col 4- DBASE. XXXX

where XXX is the left justified DBASE identification number of the record to be deleted.

The replacement card or cards, if any, follow right after the delete control card. A series of adjacent records may be deleted with one control card specifying the first and last numbers of the sequence. For example, the control card to delete records 95, 96, 97, 98, 99, 100, and 101 would be:

*D DBASE.95, DBASE.101

It would be followed by any replacement cards. Cards can be added to the fil without any deletions by specifying *I instead of *D on the control card and indicating the number of the record the insertion is to follow.

Each P1 run produces a revised listing of the file. Changes are identified with MOD numbers instead of DBASE numbers. If an error was made in MOD2 and it was to be fixed in the MOD3 run, the delete control card in the MOD3 run would be:

*D MOD2.XX

where: XX is the indicated MOD2 identification number.

The corrected record would be placed in the P1 deck immediately after this control card. An example setup of P1 control cards and changes is shown in Figure 36.

The Pl run is repeated with change cards and a new MOD number until the diagnostic output and careful checking of the deck show no further corrections are required.

Translation into LCOM

22.53

When the P1 output is free of errors, the full Phase I can be processed (step 3). The P1 and P2 decks are submitted together as a dependency run and the COMMON card is included in the P1 deck. The P1 deck also requires a new MOD number even though no change cards are entered. The catalog card in P2 must specify the file location and CY=2 for the FDATA file that will be created. Outputs from this run include a listing of the new FDATA file or records translated into LCOM format and a sorted list of all AFSCs and AGE identifying crew sizes and the tasks they perform. A complete LCOM input processor file must contain the following kinds of records in the order listed:

LCOM 10 cards specifying report column headings for the simulation output

LCOM 13 cards specifying the number and type of aircraft, types of AFSCs, types and quantities of AGE, types and initial stock of spares, and all failure clock distributions

LCOM 12 cards defining each task

LCOM 11 cards defining network sequence

LCOM 14 cards defining which failure clocks are advanced by which DCRMT tasks and the amount of advance

LCOM 16 cards giving shift policy and shift manning by AFSC LCOM 18 cards giving priority and decision rule parameters 99999 card to signify the end of input

All of these data are not included on the initial FDATA file produced from the Phase I program, as indicated in Figure 37. The FDATA file will have LCOM 10 cards specifying the first 99 LRUs as report column headings and placing the rest in "other"; LCOM 13 cards for all clocks and spares, with an initial spare level of 100; LCOM 12 cards for each unique task; LCOM 11 cards for each DBASE extended Form 11 task entry; and three sets of 14 cards specifying clock decrement values taken from the DBASE run parameter

									_		-		-
_		_		_									
\neg	5					÷			,				
\Box												.	<u> </u>
								_			_		⊢
										· · · · · ·		-	┝
					-	_	-		\neg	-			-
					-						_	_	Н
		\dashv											
-													
$\neg \uparrow$													
\neg													L
												<u> </u>	L
											L	 	<u> </u>
											<u> — </u>	ļ	<u> </u>
											 		<u> </u>
			\Box								<u> </u>		├-
				~				\prec				-	-
				2	\vdash		-3	긪			 		1
	—-						2	7			 	 	
			i	3	\vdash		-2	.,		_	 	 	Т
				*			4	4			t^-	<u> </u>	Г
				ત			3	8			<u> </u>		Г
\dashv				•••									Г
							7	7					\Box
				6			9	9			L_		
				n			Z	Z				匚	
													<u></u>
				2			7	1					<u> </u>
				0			_	-	· .	·		ļ	!
						- 1						ļ	<u> </u>
							-				ļ	 	<u> </u>
											 	 	⊢
-							_		_		-	├	╁
		≂		~~			7		7		-	├	├
		-14		1.7			-,,		•••		 	 	
		0		8			۵	0	O		1-	1	┪
				₹			Ö	0	Ö		1		
-	\vdash	O	_	٥			A	A	V			<u> </u>	
		0		0			4	4	4		· · · ·	÷ .	
		0		0			2	L	6				
											<u> </u>		_
							-			1.,			L
							_				<u> </u>		1-
	L_4				ļ			\vdash				 	├
			⊢		<u> </u>						-	 	-
						· ·				_	1	 	
	$\vdash \vdash$	e)		$\overline{\wedge}$				Ш			 	1	1
	\vdash						<u> </u>				 	\vdash	Г
-	$\vdash\vdash$	7			-		_	7					
		D	М		2			_		Ĺ.			Γ
		۵			-		A	V					
		0					4	4			<u> </u>		1_
		3			-		<u> </u>	9				_	┡
					·		 	L			ļ	}	-
					<u>u</u>			_	 -		├-		┞-
	$\vdash \vdash$,		İS	2		13	 		—		\vdash	\vdash
	 	_		ᄴ	5	<u> </u>	arpropto	=		<u></u>	 	├	\vdash
	 			7	붕		1	_	8		\vdash	+-	+
	$\vdash \neg$	7	-			3	2	2	=	_	\vdash	1	1
	 	7	 	¥	ৰ্ফ	6	×	œ	S		T		Ĭ.
			-	_	00	_		T					
	4	=	-	3	6		4	=	_ন<				Г
ļ	•	O	•	ئلت ا	•	•	0	_	_				
3	ш	O	Ш	<u></u>	Ш	(III	~	K	K				L
	3	0	S	نہ	8	S	4	4	4		L_		L
8	⋖	5	BA	V	Z	4	(A)	U	S	<u> </u>	 	 	ـ
E	DBA		ā		9					<u> </u>	-	-	╀
	1 A	1	A		A	9	 		├	├—	-	├	╀
 _	-										1	1	1
10	A		H	-	A	A	├		· ·			1	T
	A	D3	55.4 6001 CALL L3 J0002 C 00001 0 311	5E.4 0001 CALLL3 J0002 C 00010 311 SE.7	D3 SE.4 D0001 CALLL3 J00002 C SE.7 LLL3 HCØDES D 00010 31 02 291 2328X0	5E.4 SE.7	D3 SE.4 D0001 CALLL3 J00002 C	5E.4 SE.7 SE.7 SE.7 SE.7 SE.7 SE.7 SE.7 SE.7 SE.2103 SE.2103 SE.2103 SE.2103 SE.2103	D33 SE.4 D0001 CALLL3 J0002 C LLL3 HCØDES LLL3 HCØDES LLL3 HCØDES SE.7 SE.7 SE.2103 SE	D33 SE.4 SE.7 SE.7 SE.7 SE.7 SE.7 SE.7 SE.7 SE.2103 SE	D33 SE.74 SE.77 SE.77 SE.2103 SE.2	D33 SE.74 SE.77 SE.77 SE.78 SE.79 SE.70002 SE.70	D33 SE.4 SE.4 SE.7 SE.7 SE.7 SE.7 SE.7 SE.7 SE.7 SE.7

Figure 36. Sample DBASE corrections using update.

		•
REQUIRED FOR INPUT PROCESSOR	PRODUCED BY PHASE I	SUPPLEMENTED IN ZAP RUN
LCOM Forms 10	Forms 10 for Spares	Forms 10 for Reports, Missions, Aircraft, AFSCS*, AGE*
LCOM Forms 13	Forms 13 for Spares and Clocks	Forms 13 for Aircraft, AFSCS*, AGE*
LCOM Forms 12	A11	
LCOM Forms 11	All, with every unscheduled maintenance network connected to CALLS1	Modifications to reconnect unscheduled maintenance networks to be called from main network tasks other than CALLS1
LCOM Forms 14	Three sets with decrementing task not specified	Modifications to specify decrementing task and delete records not needed
LCOM Forms 16		A11*
LCOM Forms 17	***************************************	A11
LCOM Forms 18		A11 .
9999 End Card		Yes

^{*} Cards that can be used for supplementing are produced in Phase I

Figure 37. LCOM input processor file.

card. The exact translations performed by the Phase I program detailed in AFHRL-TR-74-97(IV). The LCOM forms are described in detail in the LCOM users guide (Drake et el., 1970).

Building an LCOM Input File

The supplemental LCOM inputs are set up in update format and entered into FDATA with the ZAP control deck. The update control cards are prepared as shown in paragraph above, except that FDATA numbers are specified instead of DBASE. The changes are described as follows in their order of entry in the ZAP deck. Sample entries are illustrated in Figure 38. Format for the LCOM 10 series cards is shown in Figure 39. The required entries are:

- 10 01 Card giving the initial report cycle and summary report frequency. Enter 30D in columns 8 10 and 4 in column 14. These parameters can be changed later through the simulation run control deck.
- 10 02 Card specifying the number of mission names listed on the Forms 17. (Form 17 preparation was explained earlier in Section II of this report.)
- 10 03 Card(s) specifying all the mission names listed on the Forms 17. Each mission name must be entered in the report column heading field that was indicated for it in columns 12 13 of the Form 17. Dummy missions are included. If more than ten names need to be entered, a second card is prepared in the same format but represents report column headings 11 20. A third card would be used to enter report column headings 21 30, etc.
- 10 04 Card specifying the number of aircraft types (usually 1)
- 10 05 Card specifying the aircraft name in columns 7 12.
- 10 06 Card listing the number of different AFSCs found on the AFSC/AGE printout from step 3. This card is punched out by the P2 program.
- 10 07 Card(s) naming each AFSC found on the AFSC/AGE printout from step 3. Additional cards in the same format can be used for entries under column headings 11 20, 21 30, etc. These cards are punched out by the P2 program but the user may want to alter the order in which AFSCs appear.

The 10 08 and 10 09 cards are already in the FDATA deck. Only the first 99 LRUs are listed and the rest covered under "other." If different LRUs are to be displayed, appropriate changes should be made with *D cards at this point. Comparable changes must then be made in the 13 cards discussed later in this section.

The rest of the 10 cards are entered after the last 10 09 card in FDATA using a *I UPDATE control card. They are:

IN THE OPERATIONS AREA, MISSIONS, THE COLUMN HEADINGS OTIGING IN THE APPROPRIATE COLUMN OTIGING IN THE MAINTENANCE AREA, SHOPS A IN THE COLUMN HEADINGS FOR OTIGING IN THE RESPECTIVE GROUPS ARE: COLUMN HEADINGS FOR OTIGING IN THESE CATEGORIES ARE: COLUMN HEADINGS FOR OTIGING IN THESE CATEGORIES ARE:	1314 OI] THE REPORTING CYCLE TIME IS CYCLES, A SUMMARY SEPORT IS PRODUCED.
THE COLUMN HEADINGS FOR AIRCRAFT, THERE ARE THE APPROPRIATE COLUMN HEADINGS FOR FORCE COLUMN HEADINGS FOR COLUMN HEADINGS FO	IN THE OPERATIONS AREA, MISSIONS ARE IN
THE APPROPRIATE COLUMN HEADINGS ARE: THE COLUMN HEADINGS FOR THE RESPECTIVE GROUPS ARE: COLUMN HEADINGS FOR THESE CATEGORIES ARE:	THE COLUMN HEADINGS 02/08/09/10/11/12/13/14/15/16/17/18/19/20/21/22/23/24/25/26/27/28/29/30 FOR EACH CATEGORY ARE:
THE APPROPRIATE COLUMN HEADINGS ARE: N THE MAINTENANCE AREA, S THE RESPECTIVE GROUPS ARE: COLUMN HEADINGS FOR THESE CATEGORIES ARE:	070
N THE MAINTENANCE AREA, S THE COLUMN HEADINGS FOR THE RESPECTIVE GROUPS ARE: UPPLY STATISTICS ARE ACCUMI COLUMN HEADINGS FOR THESE CATEGORIES ARE:	THE APPROPRIATE COLUMN HEADINGS ARE:
THE COLUMN HEADINGS FOR THE RESPECTIVE GROUPS ARE. SUPPLY STATISTICS ARE ACCUMICATED THESE CATEGORIES ARE:	W THE MAINTENANCE AREA, SHOPS ARE IN
SUPPLY STATISTICS ARE ACCUMI COLUMN HEADINGS FOR THESE CATEGORIES ARE:	THE COLUMN HEADINGS FOR 607081009101112113114115116117181972012122122122122122122122122122122122122
COLUMN HEADINGS FOR THESE CATEGORIES ARE:	SUPPLY STATISTICS ARE ACCUMULATED IN
	COLUMN HEADINGS FOR THESE CATEGORIES ARE:
EQUIPMENT ITEMS ARE DIVIDED INTO	N 02/08
1 1 HEADINGS ARE: 1 2 3 4 5 6 7 8 9 10 10 10 10 10 10 10	THE APROPIATE COLUMN HEADINGS ARE:

3.8

Figure 38, Format for LCOM 10 cards,

							1	•	3	1						
	P	-	┯	┿	↓	+	+	├	-	┿	+	+		-	-	1
	E	1	<u> </u>	!	٠	-		1	-	₩	-	4	┞	-		1
	E		l	<u> </u>	<u> </u>	<u>l</u>	1		<u> </u>			1			L	1
	F	1		$\overline{}$	T	I	T		T	Т	T	T-		T		1
	1	+		┼	┼	+	+	+-		+-	+	+	-	┼──	 	1
	15	┼—	├		┼	┼─	 	-	├-	+	+-	┼—		┿┈	-	ł
	E			-	↓	↓	+		├-	₩	4—	₩-	↓			Į
	12		L.	l	L					L						J
	2	T	T										Г		Г	1
	-	_	_	_	 	1	 	1	_	1-	 	 	${}^{-}$	 	1	1
	1	├	├	├	├ ─	╂	+	├	⊢	╀-		₩	-	-	ļ	Į
	E	<u> </u>	<u> </u>	 _	<u> </u>	↓	↓	ļ	<u> </u>	╀-	+-	<u> </u>	↓	╄	<u> </u>	1
	18	L_	١	<u></u>		İ	L		1	1	.1	<u> </u>	<u> </u>	<u> </u>	1	ı
	3	Г		Π,	П		T	1		1	T	$\overline{}$		Τ-		1
	1	 		├~~	_	t^-	 	<u> </u>		1	1	1	1	_	1	1
	는		-	┼──		 	+	├─		-	+	 	┼╌	+		1
				 -		┝			<u> </u>	├		 	┝	╄	├-	١.
•	3	L			<u> </u>		L		<u></u>		1	<u>.</u>	l	<u>L</u>	l	AFLC-WPAFB-JAN 74 500
	3	Г					1			П			Π		Ι	7
	1		1		1	1	\vdash	1		_	1	 	T'_			Ę
	믉	 	├		├	┢	├			┼	+	┼	┼─	-	 	1 2
	P		├		Ь	 		<u> </u>	<u> </u>	┞-	+-	 	-			1 ≱
	3	L		<u> </u>				<u></u>	<u> </u>			<u> </u>		<u> </u>	<u> </u>	Ī
	5	1			j	'	1	l .	l	1		1	l	i	1	9
	9					2		_			T			Г		*
	F	 	-	_			 	_	_	_	+	1	1	 	-	1
	۳				\vdash	 >	 			1	+	 	 	├	-	ł
	ă	<u></u>	<u> </u>	 -		<u> </u>	 	└ ┈	<u> </u>	ļ	 	-	├	├	ļ	Į
	3	L			L_	Z			L_	<u> </u>		<u> </u>				ı
	3	1	1	l	<u> </u>	4	1			1			1	L		1
	54 55 54 57 58 39 60 61 62 63 64 65 66 67 66 69 70 71 72 73 74 75 76 77 78 79 50	T		l —	T	1	1	Г		П	1	Τ-	T	Г	1	1
	÷			 	 	-	1		<u> </u>	\vdash	+	 	 			t
	ě.	├—		 		WAS HEANGA	 	<u> </u>		—	+	├	 			ł
	49 50 51 52 53					2										l
	32					A					L^{-}					ı
	E	·			Ī	3	T			•	T	П	1	Г		Ī
	-	-	_	_	_	-5	1		_	н	+	_	Н-	-		t
	-	-			<u> </u>		╌			╌	+	-	 	├		
	•					ASECC	Н.			Н	-	L-	Ц-			
	2					ш		أحصا		Ш	<u></u>	L	LL.	L		
	5					S				П	T^{-}		П			i
	•	_			-		\mathbf{T}				1		1			
	-			_		=	H	<u> </u>		╌╂╌	+		╀╌	Η-		ŀ
	*			<u> </u>		표					1—	L	ш		ш	Ы
	1										1	1				2
	48									П	1					⊠
	2					F				т	 		-			3
	7			-	_	-	├-{-	_		-	+			_	-	2
	*					-	Н.			⊢	+	 	-			
	*										1		Щ			2
	8					PR						İ		L		3
						4										_
	= 1											1				
	<u>.</u>					-	H									בׁו
	37 31															Š
	36 37 31									\blacksquare						PUNCH CARD TRANSCRIPT
	35 36 37 3															PUNC
	14 35 36 37 31															PUNC
	3 34 35 36 37 31					NG 4										PUNC
	33 34 35 36 37 31					NG 4										PUNC
	32 33 34 35 36 37 31															PUNC
	31 32 33 34 33 36 37 31					TRINGA										DNNG
	30 31 32 33 34 35 36 37 30					TRINGA										DNNG
	19 30 31 32 33 34 38 36 37 31					TRINGA										DNNG
	8 27 30 31 32 33 34 35 36 36 37 31					TRINGA										- LING
	7 28 279 300 31 32 33 34 35 36 37 38 379 40 41 42 43 44 45 46 47 48					AITA ITRINGA										PUNCT
						AITA ITRINGA			7							PUNC
						TRINGA			72						0	PUNCI
						AGATA TRINGA			72						00	PUNCT
						AGATA TRINGA			7 2	$oldsymbol{ol}}}}}}}}}}}}}}$					0	PUNCT
						AGATA TRINGA			72	Z				219	000	PUNCT
						AGATA TRINGA			1 72 1 1 1	$oldsymbol{ol}}}}}}}}}}}}}}$		00		259	0	PUNCI
						AGATA TRINGA				Z		00		1559	0	PUNCT
						CASS AGATS TRN64				Z		00		155	1.0	PUNCE
						FCAS4 AGAT4 TRM64				Z		00	_	155	1.0	PUNCE
						FCAS4 AGAT4 TRM64				Z			_	A. 455	1.0	PUNCE
						FCAS4 AGAT4 TRM64			1	Z		00	_	A. 455	1.0	PUNCE
						FCAS4 AGAT4 TRM64			72	Z		00	_	A. 455	00 1	
						T3BFCAS4 AGAT4 TRN64			1 1 1 1 1 1 2	Z		00	_	A. 455	00 1	
						T3BFCAS4 AGAT4 TRN64			1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	Z		00	_	A. 455	00 1	
						T3BFCAS4 AGAT4 TRN64	***		1	Z		00	_	A. 455	00 1	
						T3BFCAS4 AGAT4 TRN64			11	Z		00	_	FDATIAL 455	00 1	
				*		FCAS4 AGAT4 TRM64			11 11 11 11 11 11 11 11 11 11 11	Z		83A00	_	FDATIAL 455	00 1	
				4		AGATSBFCAS4 AGAT4 TRM64				Z	80	83A00	_	FDATIAL 455	00 1	
				*		AGATSBFCAS4 AGAT4 TRM64			1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	Z	3 8	83A00	_	FDATIAL 455	00 1	
						M3 AGAT 3BFCAS4 AGAT4 TRINGA		4		Z	838	83A00	_	484, FDATAL 455	C F74 A OO 1 1.0	
			2			M3 AGAT 3BFCAS4 AGAT4 TRINGA		-		Z	2838	83A00		4484, FDATAL 455	3 C F74 A OO 1.0	
			7.			M3 AGAT 3BFCAS4 AGAT4 TRINGA		\equiv		Z	. 2838	83A00		4484, FDATAL 455	3 C F74 A OO 1.0	
	9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27		•			AGATSBFCAS4 AGAT4 TRM64		=	7회 [Z	1.2838	83A00		4484, FDATAL 455	3 C F74 A OO 1.0	
	8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27		ë	30D 4	6	M3 AGAT 3BFCAS4 AGAT4 TRINGA		A .		Z	.A. 2838	83A00		4484, FDATAL 455	3 C F74 A OO 1.0	
	9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27		¥ ¥		6	M3 AGAT 3BFCAS4 AGAT4 TRINGA		TA.1	7회 [Z	TA.2838	83A00		4484, FDATAL 455	3 C F74 A OO 1.0	PENOLS ESTICAS OF THIS FORM WILL BE USED UNITS STOCK IS ENAUSTED.
	7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27		¥ ¥			DCM3 AGATSBFCAS4 AGAT4 TRN64		TA.1	7회 [Z	ATA. 2838	83A00		4484, FDATAL 455	3 C F74 A OO 1.0	
	6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27	M & D -	¥ ¥	1 30D		DCM3 AGATSBFCAS4 AGAT4 TRN64		TA.1	7회 [Z	DATA. 2838	83A00		4484, FDATAL 455	DCRMT3 C F74AOO 1.0	PREVIOUS EDITIONS OF THIS FORM WILL BE USED UMTH, STOCK IS EDANUSTED.
	3 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27	MØDI	DATA.	1 30D		DCM3 AGATSBFCAS4 AGAT4 TRN64		TA.1	7회 [Z	FDATA. 2838	83A00		4484, FDATAL 455	DCRMT3 C F74AOO 1.0	PREVOUS EDITIONS OF THIS FORM WILL BE USED UNIT, STOCK IS EDRAUSITED.
	4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27	Σ	¥ ¥	0 1 3 0 D		03 DCM3 AGATSBFCASA AGATA TRN64		A .	And I II II II II	Z	FDATA. 2838	CALLS9 B3A00		484, FDATAL 455	DCRMT3 C F74AOO 1.0	PREVIOUS EDITIONS OF THIS FORM WILL BE USED UMTH, STOCK IS EDANUSTED.
	3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27	E A	FDATA.	001 30D	002	603 DCM3 AGATSBFCAS4 AGAT4 TRN64		FDATA. 1	3	Z	T	1 CALLS9 B3AOO		FDATA. 4484, FDATA. 455	DCRMT3 C F74AOO 1.0	PREVIOUS EDITIONS OF THIS FORM WILL BE USED UMTH, STOCK IS EDANUSTED.
	4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27	N Q I	I FDATA.	0 1 3 0 D		03 DCM3 AGATSBFCASA AGATA TRN64		FDATA. 1	And I II II II II	Z	T	CALLS9 B3A00		D FDATA. 4484, FDATA. 455	DCRMT3 C F74AOO 1.0	PREVIOUS EDITIONS OF THIS FORM WILL BE USED UMTH, STOCK IS EDANUSTED.
	3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27	N Q I	I FDATA.	001 30D	002	603 DCM3 AGATSBFCAS4 AGAT4 TRN64		FDATA. 1	3	Z	T	1 CALLS9 B3AOO		D FDATA. 4484, FDATA. 455	DCRMT3 C F74AOO 1.0	PREVIOUS EDITIONS OF THIS FORM WILL BE USED UMTH, STOCK IS EDANUSTED.
	3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27	E A	FDATA.	001 30D	002	603 DCM3 AGATSBFCAS4 AGAT4 TRN64		TA.1	3	Z	*D FDATA. 2838	1 CALLS9 B3AOO		FDATA. 4484, FDATA. 455	DCRMT3 C F74AOO 1.0	

Figure 39. Sample update entries to supplement an FDATA file.

- 10 10 Card specifying the number of different AGE items found on the AFSC/AGE printout from step 3. This card is punched out by the P2 program.
- 10 11 Card(s) naming each type of AGE equipment found on the AFSC/AGE printout from step 3. Additional cards in the same format can be used for entries under column headings 11 20, 21 30, etc. These cards are punched out by the P2 program.

The 13 cards defining resource variables for aircraft, men, and AGE are entered immediately after the 13 header card in the FDATA run, using a *I UPDATE control card.

- A 13 card must be entered for the aircraft. Column 12 is I, and the aircraft name is specified in field 5 10 exactly as it was entered on the Forms 20. The number of aircraft in the simulated organization is entered in field 24 27. This may be modified later in the simulation run.
- A 13 card must be entered for each AFSC listed in the AFSC/AGE print-out from step 3. The AFSC is entered in columns 06 10, column 12 resource type is M, and the report column heading set up in the Forms 10 07 above is entered in columns 14 15. The rest of the card is normally left blank. However, if one AFSC can always substitute for another it can be entered in columns 30 34. Substitute resources should be used with caution. A set of cards without substitute resources is punched out by the P2 program.
- A 13 card must be entered for each AGE type listed on the AFSC/AGE printout from step 3. The AGE title is entered in field 06 10 exactly as it appears on the listing from step 3. Resource type in column 12 is A, report column in columns 14 15 is as specified on the Form 10 above. A set of cards with authorized quantity initially set at 100 in columns 32 34 is punched out by the P2 program. Resource quantities can be adjusted later in the simulation run deck.

The FDATA file already contains 13 cards for the clocks (C cards) and LRU spares (P cards). The P cards should be changed for duplication, and any duplicate eliminated with a *D UPDATE control card. If the LRU report columns in the Form 10 were changed above, comparable changes must be made in the Form 13 P decks using *D UPDATE control cards. The initial spare levels are automatically set to 100, but these can be adjusted later in the simulation run deck.

The next modifications that may be required are in the LCOM 11 cards. The Phase I program automatically chains all F tasks back to CALLS1 through a three digit numeric dummy mode. In some situations, call tasks other than CALLS1 may have been set up in the networks to handle conflicting maintenance contingencies. In the examples shown in Section III, CALLS9 and CALLS 8 represented the CALL tasks for engine maintenance and for landing

gear maintenance requiring jacking. The F tasks that are to be called from these specific CALL tasks must have the connecting 11 card that was created by Phase I deleted, and a card connecting it to the correct CALL section substituted. The record to be deleted will show a three digit number in columns 8-10, columns 11-18 will blank, and the prior node of the F task that needs to be reconnected will appear in columns 20-24. The record is deleted with a *D update control card and an 11 card in the following format entered in its place:

Co1 2 - 3 11
Co1 5 - 10 Name of call task desired
Co1 20 - 24 Prior node of the F task to be called from the call task specified in columns 5 - 10
Co1 26 F

A connecting card change must be made for every clock that is to be called from a main network call section other than CALLS1.

The next set of changes is made to the LCOM 14 cards. These cards specify which clocks are to be advanced and by how much of a sortie each is to be advanced when a specific DCRMT task is processed in a main network. These 14 cards are grouped by DCRMT task. The first 14 card in a group lists the DCRMT task name, a clock it advances, and it is followed by a card for every other clock advanced by the same DCRMT task. These cards specify clock number and advance but do not list the DCRMT task name. After all clocks advanced by the first DCRMT task are listed, the 14 cards for clocks advanced by the second DCRMT task are entered in a similar manner.

The Phase I program creates three series of 14 cards. Each series lists every clock. Two lists have the preflight and postflight decrement advances that were specified on the DBASE run control card, and the third series has a decrement advance of 1.00. The user must enter which main network DCRMT tasks are to advance which clocks, and delete the 14 cards that do not belong with a particular decrement advance. Also, the first 14 card in each list of clock advances must specify that DCRMT task that triggers the advance. The mechanics of the change are to delete the first applicable 14 card in each list and substitute a similar 14 card with the DCRMT task tame added in columns 5 - 10 exactly as it appeared in columns 12 - 17 on the main network extended Form 11.

The procedure is best explained with a specific example. The main network for a ground attack mission shown in Chapter III had a DCRMT1 task for unscheduled maintenance before the sortie, a DCRMT2 task for unscheduled maintenance after the sortie, a DCRMT4 task for scheduled maintenance in postflight, and a DCRMT3 task for unscheduled gun maintenance after a gun mission. If the specified preflight clock advance was .03 and the postflight advance .97, FDATA will initially show a series of 14 cards with

.03 in columns 24-26 for every clock, followed by a series of 14 cards for with .97 in columns 24-26 for every clock, followed by a series of 14 cards with 1.00 in columns 23-26 for every clock. The *D UPDATE control cards are used to delete all scheduled maintenance and gun clocks from the .03 list. The first unscheduled maintenance clock in the .03 list is also deleted with a *D card and a similar card substituted that has DCRMT2 entered in columns 5-10.

The same thing is done with the .97 list, except the new card for the first unscheduled maintenance clock has DCRMT2 in columns 5-10. The 1.00 list applies only to the gun and to scheduled maintenance. The 14 card for the first scheduled maintenance task is deleted with a *D card and a similar card substituted that has DCRMT4 entered in columns 5-10. The 14 card for all unscheduled maintenance clocks in the 1.00 list are deleted with *D UPDATE control cards. The gun clock 14 card is reentered with DCRMT3 in columns 5-10. The end result of the deletions should be a set of 14 cards with clock advance values .03, .97, and 1.00 still in ascending order. A card specifying each DCRMT task is followed by cards for all the clocks decremented by that task.

The optional "PM" program may be used to determine the probability of a maintenance action before and after flight for various values of clock advance. The 13 cards are read from the FDATA file and run through the PM program. A control card specifies five trial clock advance values. The program may be run for the whole aircraft or for individual subsystems. Another optional program is available to read and repunch the 14 cards with new clock advance values. The old 14 cards would then be deleted and new cards entered in a ZAP UPDATE run. The probability decrement value change programs are not usually required, so are not shown in Figure 35. They will be described in a future AFHRL TR.

The final step in building an LCOM simulation input deck is to enter the LCOM 16, 17, 18, and 99999 cards. These follow the last 14 card in the deck and may be entered in a block using a single *I card.

The first LCOM 16 cards specify shift policies. The rest give the initial unconstrained manning for each AFSC entered on a 13 card above. The 16 card entries are as follows:

- A header card with 16 in columns 2 3
- A shift definition card with * in column 5 and the number of hours in each shift starting at midnight. Three eight-hour shifts would be entered with eight in column 17, eight in column 21, and eight in column 25. Two twelve-hour shifts running 0600-1800 would be entered with six in column 17, twelve in columns 20 21, and six in column 25. Entry of more complex shift patterns is described in the LCOM Users Guide (Drake et al., 1970, pp 8-15).
- A card with R in column 5 and seven in column 25 for a seven day work week.

A card for each AFSC that was listed on a 13 card, giving very high values for totally unconstrained shift manning. The format is AFSC in columns 8 - 12 and number of people in columns 15 - 17, 19 - 21, and 23 - 25. A set of cards with 200 people per shift is punched out by the P2 program.

The LCOM 17 cards were described in Section II. A header card with 17 in columns 2-3 and all the 17 cards are inserted at this point.

The LCOM 18 cards specify various simulation parameters. Their correct values are difficult to estimate but they can have subtle but significant effects on the result. When in doubt, the best approach is to render them inoperative. Suggested entries are as follows:

- 18 header card with 18 in columns 2 3
- 18 04 card with two in column 7, one in column 13, and 0 in column 19. This limits preemptions (stopping a job to task resources for a higher priority job) to two per task for the flightline and one per task for phase.
- 18 06 card with .48 in columns 7 9, 13 15, and 19 21. This limits maximum overtime at the end of a shift to just under half an hours. If it is a half hour or more, it distorts the matrix output discussed in the next chapter.
- 18 07 card with 50 in columns 8 9, 100 in columns 13 15, and 100 in columns 19 21. These values practically nullify the LCOM option of increasing priority in proportion to delay, and force the program to follow the established AFM 66-1 priorities.
- 18 08 card with .99 in columns 7 9. This practically nullifies the LCOM option of shortening task times when delays occur.

The final card entered in the ZAP UPDATE run in an LCOM end card with 99999 in columns 1-5. The ZAP control deck must specify the file location name and CY=2 on the UPDATE attach and catalog cards and the file location name and CY=3 on the "TAPE9" catalog card for the LCOM input processor.

The P1 and P2 programs are undergoing continual improvement to produce more of the LCOM input processor deck on the initial FDATA file. Changes to include all 13 and 16 cards in FDATA may be operations in the near future simplifying the above procedure.

Debugging the Input Processor

The LCOM input processor printout from the ZAP run contains several additional diagnostic checks that were not made in Phase I. The first step in checking out the results is to see if the output cataloged in Cycle 3. Then check whether the run ends with the statement, "initialization tape produced." If the tape was not produced, it means the program detected a fatal error. Go through the run, find the diagnostic, and make the necessary corrections.

Check the listing of deletions and inserts at the beginning of the run to verify that the modifications were made as intended. The printout starts with a listing of input cards. The next list show all records deleted indicated by D on the far right side of the page and the records added indicated by I.

Carefully check each page of the following output for error messages and entries that look out of place. Producing an initialization tape is no guarantee that the data base is completely error free. Some diagnostic messages are not fatal in the input processor but warn of entries that might cause problems in the simulation.

Some SIMSCRIPT initialization data follows the data on changes. This need not be checked. Next are listings of the "Report Specifications" (LCOM 10 cards), "Resource Definitions" (LCOM 13 cards), "Task Resource Requirements" (LCOM 12 cards), and "Task Network-Input Data" (LCOM 11 cards) Some useful diagnostics follow that should be thoroughly checked. The first is titled, "The Following Nodes are Network Entry Points." The list under this heading should contain all the entry nodes listed on the Form 17, plus the call tasks, but nothing else. Any other node listed indicates a networking error. Check the DBASE listing and find why the task record leading to such a node was incorrectly entered in the run. Frequently the cause will be a keypunch error in the node number, such as a letter 0 instead of zero.

The output, "The Following Nodes are Undefined," lists nodes entered as next nodes on an extended 11, but never as the beginning node of any following tasks. Check the DBASE listing and find out why. Such next nodes are either unnecessary or should be leading to something.

"The Following Nodes are Multiply Referenced," is followed by a list of all the nodes that have more than one task leading to them. There is nothing wrong with this, but a careful check of each one in DBASE will often disclose an unintended error. They should at least be checked out in the first ZAP run.

No tasks should appear under, "The Following Tasks are Constrained." This refers to use of the B selection mode not previously mentioned in this report. The B was not recommended because it can only be used in restricted situations without introducing errors. Both B selection mode and call sections handle parallel task constraints, but the call sections are more generally applicable.

All the nodes leading to more than one task are listed after the heading, "The Following Nodes are Multiply Defined." Multiple definition is common in networking logic and does not indicate any error. The listing of "Resource Clock Decrements" (LCOM 14 cards) should be checked to see that each DCRMT task is listed once and is followed by the list of the clocks it advances and correct amount of advance. After listings of "Shift Policies," (LCOM 16 cards), "Mission Entry Points-Classes," (LCOM

17 cards), and "Priority Specifications" (LCOM 18 cards), there is a list of "Resources Never Referenced," this should only contain the aircraft name. Check anything else in the AFSC/AGE list produced by the P2 program to trace the error.

The next heading is, "The Following Tasks were Not in the Task Network." Anything appearing here other than call tasks indicates an error made in the ZAP UPDATE control cards. After a meaningless list of cost values there are various tables and indexes used in the simulation program; the numbers assigned in the "Resources" list will be an important reference when setting up the simulation run decks. Any resource level changes made at that time must refer to the resource numbers in this index list.

If the input processor contained any errors, go back to step 3 and rerun Phase I with the necessary DBASE correction cards. The part 2 control deck must now include a purge card for CY=2. Most of the same ZAP change cards will be used in rerunning step 4, except that the UPDATE control cards must refer to FDATA identification numbers on the new FDATA run. This same procedure (rerunning steps 3 and 4) is followed for all. UPDATING changes to the data base. The DBASE file serves as the master control deck of maintenance input and model configuration.

Establishing the Operations File

Form 20s are run through the LCOM input processor using the 20s deck with a catalog card specifying the file location and CY-4. The input data preparation was covered in Section II. These data are entered in the following order:

LCOM 15 header card, with 15 in columns 2 - 3 (use only if Form 15 is required)

LCOM Form 15, if required to specify alert mission distributions LCOM 20 header card, with 20 in columns 2-3

LCOM list card, with list in columns 1 - 4, the number of days of operations data to be generated on file specified in columns 5 - 7, and a scenario title starting in column 9.

LCOM Form 20, ordered by day and take-off time within day. Alert missions with a distribution number in the takeoff column are placed at the end of the indicated day. Ordering the Form 20 card input by day is essential or missions will be missed.

A summary table should appear at the end of the 20S LCOM input processor run. It gives missions, sorties, and flying hour totals (including dummies) and breakouts by mission type. Be sure the totals for 20S real missions match the intended program and scenario, and that the proper number of dummies are included. If the Form 20s need to be updated and rerun, a purge card for CY=4 must be included in the 20S deck.

VII. TESTING AND OPERATING THE SIMULATION

LCOM Run Parameters

Before proceeding with this section, it might be useful for the reader to go back and briefly review Section I on how the LCOM program works.

The LCOM simulation control deck MM must include appropriate attach cards to access the maintenance and operations files. The attach TAPE7 card must specify the location and cycle of the operations data file, and the attach TAPE9 card must specify the location cycle of the maintenance input file. If data is to be stored for a matrix program run, the deck must also include a catalog Tape 11 card specifying the location and cycle of an empty output file.

The LCOM parameter cards are placed behind the SIMSCRIPT initialization cards at the end of the control card deck. Formats for all the cards normally required are shown in Figure 40. Additional options are described in the LCOM USERs guide (Drake et al., 1970, pp 8-34).

The RFREO card specifies the interval in simulated days between performance summary outputs. The RCYC card gives the number of successive reports to be included in an overall summary report. The STOP card specifies the run length in simulated days, plus one tenth. The extra tenth assures that the last day is completed and included in statistical The SWICH 101 card as shown must always be included in runs with the ASD CDC 6600 LCOM program. The PCT card specifies the factor for increasing the remaining time on a job interrupted for a shift change or a higher priority preemption. Experience with in running several LCOM simulations shows that results can be highly sensitive to this value. The PCT card must be included in every run with a parameter value no greater than 1.05 and no less than 1.00. The 45 card indicates the cutoff time, in hours to takeoff, for starting to process an unprepared aircraft for a mission. Experience indicates that one hour is a reasonable value when simulating operations with tactical fighter bombers. It might be wise to recheck the sensitivity of this parameter if a different kind of aircraft is being simulated. The 47 card releases all ready spare aircraft at the specified interval of days. Ready spares are held for the next mission of the same substitution class. Normally, this parameter should be set to equal or exceed the simulation run length so that it is inoperative. • It may be set to release spares at break points where the scenario shifts to a different mission mix. A 47 card must be included in every run.

The AUTH and 46 cards are used to change resource quantities for each iteration of the constraining process. The AUTH card is used to change the number of aircraft, spares, or AGE. The 46 card changes manning by shift. The resource ID number found in the ZAP input processor is used to identify the resource to be changed. The SWICH 123 card turns on output to the matrix tape at the specified time and SWICH 120 turns it off. The manpower and backorder matrices are important tools for the contraining process discussed in Section VIII.

PARAMETER NAME LEFT JUSTIF COLS 1-6	INTEGER VALUE RIGHT JUSTIF COLS 7-12	DECIMAL VALUE DEC PT IN 19 COLS 13-21	ALPHA VALUE COLS 26-31	INTEGER VALUE RIGHT JUSTIF 35-37
RFREQ		INTERVAL		
RCYC	FREQUENCY			
RUN			NAME	
STOP		TIME*		
SWICH	101	0.1		ji iziy√o terkis
PCT		1.05		
45		1.0		
47		INTERVAL		
AUTH	RESOURCE ID NO	QUANTITY		
46	RESOURCE ID NO	SHIFT NO		QUANTITY
SWICH	123	TIME*		
SWICH	120	TIME*		
MNSTAT		TIME*		
BOSTAT		TIME*		73 4
ITEM		TIME*	·	
ISEED	1	SEED		
ISEED	2	SEED		
ISEED	3	SEED		

^{*}TIME entries are in decimal days. The fourth day at 0600 hrs would be entered as 4.25 in Cols 18-21

Figure 40. LCOM run parameters.

The rest of the parameters listed in Figure 40 are only used for debugging, checkout, and sensitivity tests. MNSTAT, BOSTAT, and ITEM give detailed "snapshots" of what is going on in the simulation at the specified point in time. MNSTAT provides a mission status output, BOSTAT displays delayed jobs, and ITEM gives the status of all resources. The three seed cards are used with any different numbers between 1 and 99 to alter the sequence of random numbers drawn during model processing.

Test Deck Setup and Checkout

Sections II through VI explained how to develop and check out the individual elements in the simulation data base. These must now be checked out together before proceding with the full simulation runs. A 30 day form 20 file is constructed for the first test. The Form 20 cards up to Day 30 are duplicated with 30 inserted in place of any number of 30 in columns 71 - 73. The 20S deck is then run with these test Form 20s, using a list card specifying 35 days, and set to catalog the file in CY=5. This will put a 37 day schedule on file with scenario missions for 30 days followed by five days with no missions at all.

A 35-day simulation with diagnostics is then run against this schedule. The LCOM control card deck is set up with:

run time approximately 1,000 seconds
attach TAPE7 card specifying the file location and CY=5 for the
 test LCOM operations input file
attach TAPE9 card specifying the file location and CY=3 for the LCOM
 maintenance input file
no catalog TAPE11 card

The LCOM run parameter cards are set up as shown in Figure 41. This gives a 35 day unconstrained run with reports every five days, a 30 day summary at the end of the flying schedule, mission, resource, and backorder diagnostics on day 21, and again at the end of the last nonflying day.

The operations output on the LCOM performance summary should show at least 98% of all real sorties accomplished and 100% accomplishment of all phases and scheduled inspections. Mission accomplishments should approach 100% for this unconstrained run. Preflights and hangar dummies may have a lower percent accomplished since they are affected by the number of aircraft tied up in long repairs. If these rates are not achieved look at the pattern across each five day period. If the percentages are approximately constant after the first five days, it indicates an operations data problem. If they continue to decline, it indicates a problem in the maintenance input.

The MNSTAT diagnostics are helpful in debugging an operations data problem. Data are shown for each mission in preparation at the time of the report. The type column indicates the aircraft resource ID number. If it is negative, no aircraft is yet available to start processing. Status is 0 if the aircraft is still being prepared and 1 when it is

PARAMETER NAME LEFT JUSTIF COLS 1-6	INTEGER VALUE RIGHT JUSTIF COLS 7-12	DECIMAL VALUE DEC PT IN 19 COLS 13-21	ALPHA VALUE COLS 26-31
RFREQ	0	5.00	-
RCYC	6	0.00	
SWICH	101	0.10	
45	0	1.00	
47	0	36.00	
MNSTAT	0 1	21.20	·
MNSTAT	o	21.30	
MNSTAT	0	21.40	·
MNSTAT	. 0	21.45	
MNSTAT	0	21.55	
MNSTAT	0	21.60	
MNSTAT	0	21.65	
MNSTAT	0	21.65	
ITEM	0	21.75	·
ITEM	0	21.45	
BOSTAT	0	21.75	
MNSTAT	0	34.95	·
ITEM	0	34.95	
BOSTAT	0	34.95	•
PCT	0	1.05	
RUN	0	0.00	TEST
STOP	. 0	35.10	

Figure 41. Example LCOM test run parameter cards

ready to takeoff. If aircraft appear to be available and the performance report shows a high percentage of missions but not sorties accomplished, the Form 20 leadtime is probably too short. If aircraft quantity on the 13 card is correct and mission computations check out but aircraft are not available, the schedule may not allow enough time between first flights and turnaround flights.

The resource status and backorder status outputs are useful in debugging network problems. The resource status report shows the number authorized (AUTH), available for assignment (OH), out on jobs (DIB), and needed but not available (DOB). Resources are identified by ID number listed in the ZAP input processor output. The backorder status report shows the resource ID numbers and quantities required for delayed jobs. The job number shown can be traced to a task through the task index in the ZAP input processor output. If a problem is traced to a particular resource and the available quantity (13 card input) is correct, the AFSC/AGE list output from Phase I may be useful to help trace the network tasks causing the problem.

In addition to showing high percentages of sortie accomplishment, the performance summary should not show any unsatisfied demands for personnel or there is a network error. The number of reparable generations for each item in the shop repair summary should equal the number of units demanded for the same item in the supply summary. If not, there is an error in the equivalent relationship required between 0 tasks and asterisked W,K, and N tasks for that item. The number of items in repair and backlogged should not show any continuing pattern of increase after the first five days. There should not be any cannibalizations, supply backorders, or unsatisfied supply demands. Any unsatisfied demands for equipment, indicate that an AGE 13 card or network task is in error. The diagnostics for the last day of no flying should show no missions, no resources working or needed, and no jobs delayed in backorder. Anything else indicates a data error.

When all the problems have been analyzed and corrections identified, go back to the DBASE file or supplement to FDATA, as necessary, to make the needed changes. Make sure that any Form 20 changes are made to both the full operations file and 30 day test file. Repeat the process of data base building and simulation checkout from the point corrections were made and get another test run. Continue debugging until an unconstrained simulation is obtained that checks out perfectly in all respects.

Establishing Run Length

Simulation runs must be long enough that results clearly measure the long run effects of input conditions, and not change occurrence of random fluctuations. If the model is rerun with the same input but different random seeds, the conclusions should still be the same. An example of criteria for run length would be that sorties accomplished will vary less then 1%; total wing manhours will vary less than 3%, and manhours for any single work center will not deviate by more than 5% (or by the equivalent

of one man if under 20 people). Run lengths can be shorter if less precision is satisfactory for the specific questions to be answered with the simulation run.

Adequate run length is different for each scenario and maintenance model. It is more a function of processed and sorties flown than simulated days. To compound matters, it can also depend on the degree of constraint. A reasonable procedure is to make an initial unconstrained test to approximate an adequate run length (in simulated days) for running a new LCOM model. Use this length for the first simulation study. When final results are obtained, redo the run length test with the final constrained manning and different random seeds. If the approximated run length was too small, the recheck will provide enough data to correct the results and also establish a better fix on run lengths for subsequent simulations of the same aircraft.

Factor this run length by an inverse ratio of total sorties scheduled when simulating different scenarios or unit sizes. The run length in days for simulating a 24 aircraft squadron must be three times the run length for simulating a 72 aircraft wing flying the same sortie rate.

Run length for the initial unconstrained run length test is estimated by:

Run length (days) =
$$\frac{27,000,000}{\text{Jobs Processed in 30 Days}}$$

The number of jobs processed in 30 days is shown on the last page of the LCOM performance summary from the 30 day test run. The test Form 20s can now be purged and the original deck (with 999 in columns 71 - 73 where appropriate) cataloged in its place using a list card specifying the number of days required for the run length test. The simulation control deck is set up with:

Attached TAPE7 specifying the run length test Form 20 file location and cycle

Attach TAPE9 card specifying the LCOM maintenance input file location and cycle

Not catalog TAPE11 card

4

The LCOM parameter cards are set for:

A performance report every 30 days
A summary every third report
SWICH 101 card
45 card
47 card equal to run length to nearest 30 days
No diagnostics
PCT card
Run name = length
Stop at run length to nearest 30 days plus .1

Sorties and manhours by AFSC are representative run length criteria. A 30-day whole man equivalent is the number of manhours per month available for direct productive work (e.g., 85.2 in peacetime, 144 in wartime). Any difference less than 144 manhours per month would be less than a man in a wartime scenario. The results from the performance summary are transcribed to a table similar to Figure 42. The differences between various combinations of 30-day periods, 60-day periods, 90-day periods, etc. are calculated. The smallest time period that shows all differences within their respective criteria is selected. Thirty days are added to allow stabilization before taking data. This estimate can then be used to set run length for the first simulation study.

In the example (Constrained run final check) shown in Figure 42, all measured except engine shop manning were within criteria at 90 days. Engine manhour variability is 6% slightly less than or two equivalent men. It was decided that improving precision by one man in one shop was not worth the cost of simulating another 30-day period on each run, so run length was set at 120 days (30 day stabilization + 90 days accumulating data).

Full Simulation with Matrix Output

4

Figure 43 shows the run sequence for a full simulation. The LCOM program is run for the number of days determined in the run length test. A catalog TAPE11 card specifying a file location and empty cycle is included in the control deck to produce a matrix data file. LCOM parameter cards SWICH 123 and SWICH 120 are used to specify the days matrix data output is turned on and off. These should match the periods of performance summary data that will be analyzed, discarding the first month of data for stabilization. The report frequency specified in the LCOM run deck is the number of work days in a calendar month. Normally, this is equivalent to the number of flying days. For combat simulations, there are 30 days in every month but there may be only 23 work days per month in peacetime.

The MX control deck is run with an ATTACH card specifying the location and cycle of the cataloged matrix file. The program prints matrices show demands and backorders for each AFSC by time of day. These matrices are used in determining manning levels by the methods described in the next section.

The first parameter card at the end of the MX deck is set up as follows:

- Cols 2 4 Total number of AFSCs as specified on the LCOM 10 06 card in the input processor file
- Cols 5 7 Start day of matrix, as indicated on the SWICH 123 card in the LCOM simulation run deck. Entered as the nearest whole number, right justified, no decimal
- Cols 8 10 Stop day of matrix, as indicated on the SWICH 120 card in the LCOM simulation run deck

The rest of the parameter cards for the MX run specify the AFSCs and report columns in the order entered on the LCOM 13 cards. They are entered in eight column block across the entire card. The first five columns of each block give the AFSC and the last two specify report column. For example:

	PERIODS	SCHEDULED SORTIES % FLOWN	TOTAL MAN HRS.	431X1 MAN HRS,	432SO MAN HRS.	421X2 MAN HRS.	WHOLE MAN EQUIY.
30 DAY PERIODS	1 2 3 4 5 6	97.8 98.2 98.4 97.5 98.3 98.1	106,532 100,702 103,142 105,463 105,283 107,602	19537 19834 19445 19683 19685 19761	2688 3306 2889 2937 3325 3214	2982 3196 2894 3092 3030 3138	
30 DAY DIFFERENCES	2-1 4-3 6-5	0.4 0.9 0.2	5,830 2,321 2,319	297 238 76	618 48 111	214 98 108	144 144 144
60 DAY DIFFERENCES	(65)-(12) (65)-(34) (34)-(12)		5,651 4,280 1,371	75 318 243	545 713 168	10 182 192	288 288 288
90 DAY DIFFERENCES	(456)-(123) (246)-(135) (136)-(245)		·	313 591 459	613 555 777		432 432 432
		WITHIN 1%	WITHIN 3%	WITHIN 5%	* 6%	WITHIN 1 MAN	

4866.y

Figure 42. Representative extracts from an analysis of run length test data.

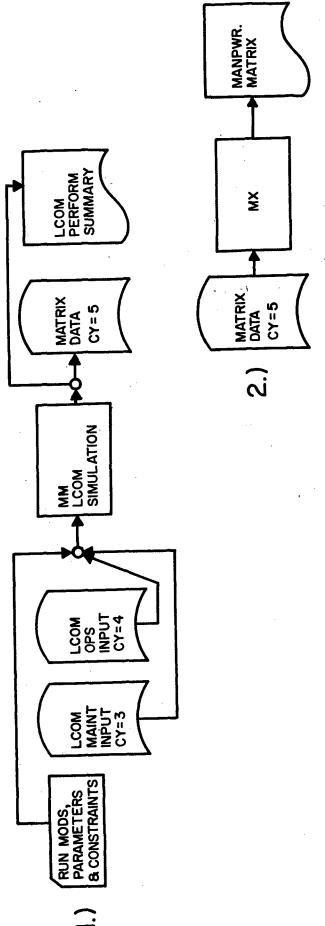


Figure 43. Simulation run sequence.

Cols 1 - 5 First AFSC
Cols 7 - 8 01
Cols 9 - 13 Second AFSC
Cols 15 - 16 02
Etc.

additional cards follow specifying report columns 11 - 20, 21 - 30, etc, as needed.

An appropriate version of the matrix program must be used to provide summaries for the assumed shift pattern. The designated ASD programmer can provide a deck to give summaries at 0800, 1600, and 2400 (for eight hour shifts) or at 0600 and 1800 (for 12-hour shifts).

VIII. ITERATIONS TO CONSTRAIN DIRECT MANNING

General Concept and Method

required flying program.

Manning for certain work centers is determined by existing command standards rather than by the simulation. Examples are work centers such as the crash recovery crew, the machine shop, and the personnel equipment shop. These are treated as an overhead requirement in the Moody manpower program (Section IX).

The simulation is used to determine daily manning requirements for those AFSCs and work centers whose workload is generated by aircraft flying, and who report their work against aircraft work unit codes in MDC. This covers the majority of the field and organizational maintenance AFSCs and includes all those with large manning requirements. The daily manning requirement in these work centers is the greater of:

Manning dedicated to fixed posts, such as runway checkers, alert pad crew chiefs, and engine test cell operators. They must spend a full shift at their assigned posts regardless of workload, and are not available for assignment to any other work during that time. They are included in the simulation rather than treated as fixed overhead since their work directly constrains aircraft availability.

Manning to accomplish the number of direct hours of work required on the aircraft and equipment removed from the aircraft.

Manning to cover the minimum crew sizes for every shift on the flight line and at least one shift per day in the shop. For example, if it takes four 432XOs to change an engine, the engine flight line dispatch crew must have at least four people on each active shift.

Manning to meet peak workloads that are essential to accomplish the

The sortie rate determines which of the above factors drives the manning requirement for each AFSC under a given maintenance model and set

of operations and maintenance assumptions. This relationship is illustrated in Figure 44. Post or minimum crew manning must be provided to fly and do the required maintenance at all. It is shown as a horizontal line representing the fixed portion of the manning requirements.

Another independent curve represents the manning equivalent of the direct labor required to service and maintain aircraft. This is a nearly linear function of sorties flown. The increasing slope at high sortie rate represents a certain amount of rework on jobs preempted by higher priority demands. This "PCT" factor was discussed in Section XII. The likelihood of such interference increases with sortie rate.

The third independent curve in Figure 44 represents manning required to meet peak demands for people working at the same time, which if not met will prevent accomplishment of the required flying program. This depends on a number of interacting factors. Indirect work is assumed to be deferable (i.e., can be done in slack periods), and if adequate spares are available, shop work is deferable also. Under an AFM 66-1 concept where flight line and shop work can be done by the same people as needed, these deferable manhours provide a buffer to cover all except the most severe flight line peak demands. The larger the organization, the more random demands average out and the larger the buffer available to absorb them. However, if the flying program is highly irregular with massed flights at particular times of the day; if there are few or no spare LRUs; if the indirect work allowance is small; or if the flight line and shop work are handled by separate cadres; more people may be needed to cover peak demands than are provided to cover the manhours of work at the assumed percentage of direct labor utilization. The slope and shape of this curve depends on the interaction of the various factors involved. It is entirely simulation determined. as discussed in the fourth paragraph of this section.

Computing Daily Requirements

As discussed above, the number of people required per day is the greater of the number needed for post manning, the minimum number needed to voer crew size requirements on each shift, the number needed to accomplish the manhours of work, or the number needed to meet peak workloads. In the initial computations peak workloads are ignored; they are only brought into consideration if manning based on the other factors proves insufficient.

Minimum crew sizes per shift are found on the AFSC/AGE printout that was produced on the Phase I Data Base Translation Run (Section VI). The largest crew required for a flight line task is usually put on every shift. The largest crew required for a shop task (action type N, W, or K) need only be put on one shift if spare LRUs are available and shop work is deferable. Some judgment is necessary in minimum crew assignment. If only one flight line task needs a large crew size, and it is very infrequent, it may be feasible to man only one shift with the large crew size.

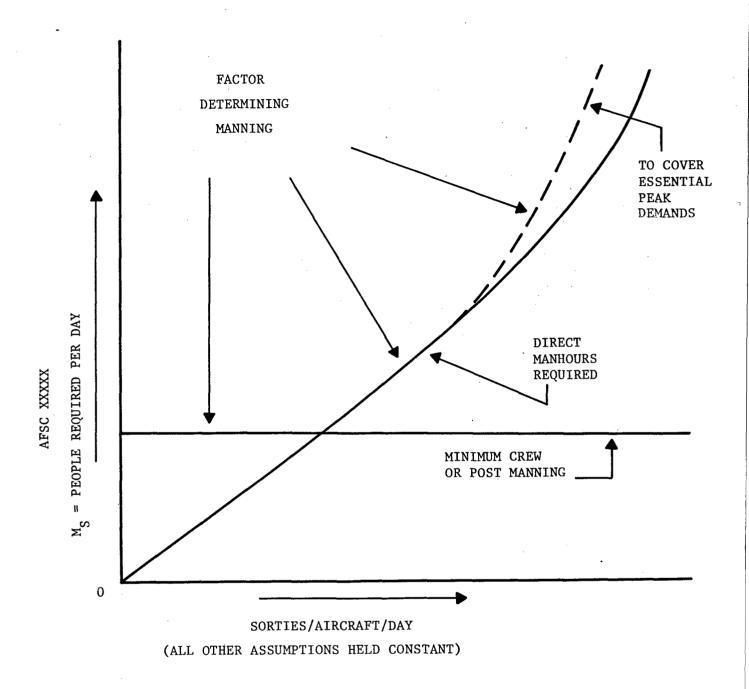


Figure 44. Factors determining daily direct manning requirements for an AFSC.

Post manning is determined by the operations and maintenance assumptions obtained from the using command. End of runway checkers and alert crew chiefs are typically dedicated to post manning. The pilot of the functional check flight may be assigned as post manning for daylight hours only as a way of modeling the constraint that test flights are not done at night.

The daily manning needed to accomplish the required manhours of work on the aircraft and equipment removed from the aircraft depends on the proportion of the maintenance man's available hours that can be used for direct work. Ideally, this is determined by measuring the actual requirement for indirect work and allocating the rest as direct. Lacking such data for new aircraft, the current Air Force AFM 26-3 standard of .60 direct utilization has generally been assumed, but the manning requirements determined can be quite sensitive to this assumption. The operations and maintenance concept obtained from the operating command must define the number of workdays per month and the number and length of shifts per day. The number of people by AFSC that are required per day across all workshifts is:

M_S = Direct Manhours Required/Mo.
(Direct Utilization) (Workdays/Mo.) (Shift Length)

Where direct manhours required per month are obtained from the LCOM performance summary. This is the shift loading, not the total manning requirement.

Allocating Daily Manning to Shifts

Where the daily requirement is based on post manning or crew size, the shift allocation is already determined. However, where it is based on manhours of required work, the total number of people per day must be allocated to shifts. This is done with the aid of the work center matrices. These matrices show how the workload for an AFSC varies with the time of day. Separate matrices are provided for flight line and shop work.

The matrix displays the number of times during the simulated period that the number of people shown on the leftmost vertical axis were working at the time of day shown on the horizontal axis. The time is in half hour increments. The cumulative sum of these data over a workshift is shown in a vertical column at the start of that shift.

An example of a flight line matrix for three eight hours shifts is shown in Figure 45. It shows, for instance, that on 10 of the 90 simulated days there were 17 431Xls working at 1000 in the morning during the second shift (number of people working is indicated on the extreme left vertical axis). The greatest demand for 431Xls occurred at 0300 during the first shift. Once on the 90 days, 35 people were required at that time, and the fewest ever required were 15, which also occurred only once. On 12 of the 90 days, 24 431Xls were working at 0300.

(X%)(No. of UE ACFT)(No. of 1/2 Hrs/Day)(No. of Days)
(No. of Work Centers)(No. of shifts)

. 14

										•	- ~	ᠰ	m	4	7	σ,	<u>ت</u> ہے	3.	2	_	4	٥						0	i
									۰ م	9	ه م	4	6	=	ထ	σ,	_ ~	ົ	4		4							٥.	23
	¥										_	1		Ξ		~	4 <	4	9	6	2 -	n		7	9	4 r	,	2	i
	2											1		_		_	c	٦ د	œ	Ξ	25	2 ~	'n	2	ω.	∞	4		22
	<u> </u>													_	~		N -									4 r.		0	<u> </u>
	OF SIMULATION DATA													~		•	ກ -	- 4	7	9	ထင္	3 14	9	2	7	ر م	1	0	2
	₹									•	_	Γ								œ	տ ը	0 11	, &	4	_			٥,	
	S)							_	•	<u>س</u> د	<u>م</u> م	<u>'</u>	12	5	_	5	2 =	54	2	٠.		_	_	٠.,		_	_	0	20
	6										_ ``										-					_		_	6
	DAYS							_		•	2 4 د	4 2	4								۷ ر و د			_	2			0	-
	20											L	-						•	•							. ~		8
	8								_	_ `	٠	匚	_	4	ω. •	4 4	24	, o.	₹	о О	, c	ο α	2	9	8	2 6	· —	_	[
ئد									_		_	J	٠.	_	*	ω.					<u>ო</u> ი				ω,	_		٥	12
Ē	Ĕ					_			_	_	9	m	4	4	9	20 9	00	9.2	<u>~</u>		E .	5	. ~		•	_		0	
96 Ticks Out.	COVERS	00	00	000	0	~ .	2 A	- ∞	4	φų	- 2	L	6	~	m	•			•						41		m	4	
5									<u>-</u>	2	<u>,</u>	Ю	3	6	27						*48					× *	*		SHIT SHIT
<u>ب</u>	¥						_	•			- -	~	4	_	<u>س</u> ،	4 5	+ 4	0	5	6	7 2	٠ ،	m	r.	4	4 ~		~]	20,
	≨			-	-		-	•		2	Γ	~~	4	4	m ,	- (n (*	•								_		٥	2
	THIS MATRIX											_				•			9	2	9,0	· ~	9	Ξ	330	613	4	۳ 1	-
5184 54	Ė															٠						_	•		•	_		- 4	- 4
2	_								_		-	_	9								212		_	က	٠,	4 4		0	
н	ž									_	_ `					_								_	٠.,	_		0	3
~	4					c	4	,	m	m -	- -	4											_	7		.,		0	_
8	띮				N.	- c	<i>,</i>	·	m	٠,	ماد	۰		۳,				· m		ͺ	_	_		_	_			٠ ا	2
<u>al_</u>	盖					, c	4 6	'n		٠.	1 0	m	œ	4	ω (ກີ	ō _			o o	m -		~					0	
.05)(24)(48)(90) 18 × 3	ON EQUIPMENT MANPOWER MATRIX FOR WORK CENTER 431X1				~	~ ~	v m	~			مار											,	_			_		o †	=
8	Ş							•	_	ო -								, _			v	,				_		0	
2	<u>~</u>					-				2	~	2	~	0	٥,		ט וני	·~	0	_	ע א ני א	_	_		c	7		0	2
3	5									_				=:	₹,		t (*)	ည	5	വ	v <u>₹</u>	-	_	_	ຕຸ	<u>.</u> 4		۲,	_
	ž									(00	4			•	~	- ،	۰ د	7	_	~	y o	ø	2	9	ω σ	ν ~	0	∞┆	. 6
	Ε									•	7							_	_						5.	‡ <u>0</u>	4	٠ <u>:</u>	<u>.</u>
	200	0	00	0 -	- LO	25	3 %	42	24	5 5	ģ	99	56	8	<u>_</u> 5	3 8	9 29	28	<u>ت</u>	8 6	200	8	54	8	9	35	6	Ţ	SHIF
	뽕					1					_	_	C)	α,	_ (7 F	run -	_	~ 1	ο.	+ ~		•	io:	* *	: * າທ	*	↓ †	ິຫິ
	Š					1								,	_,		- 4	_	4	o r	. 0	4	ω	Ξ	ω G	4	Ň,	- !	
	Σ					- 1	_			_						- ،	, 6	2					4			2 0		_ t	^
	E					-	_				2		_	- 6	י מ	ი <	۲ م	n	2	<u> </u>	<u> </u>	2	m	7	m -	-	•	~ ¦	
	₹										2	_	_								ש ע			4	9.0	ว	•	o †	9
	8										2										5 4	4	_	_	۰,	1	•	o į	
	z					∾⊦	-		-	— a	4	œ	2	φ (ω 5	2 ^	'n	2	m				_					0 ;	Ω.
	0			_	2	ľ	າເດ	4	2	2 5	<u>.</u>	σ	φ,	9 1	o,	ם כ	٦,	. rc			_	•					•	ا -	
		_	٠.	m <	. 2						9					_												0 1	•
			7			- 1					=				``	,			,									- 1	m
		m	~ 4	~ m ~	- w						2					_												o i	
			•••																									- 1	2
						-[, (*)				2 9								ر و ر		- + 00	~	S	9		_		o Ì	
						d												_				٠ ح	က					o †	_
						<u>8</u>		_	_	-	7 t	_	4	~ .	- 4	ט ע	~~	<u>6</u>	4	, م	2 ~	4	4		' -	-		5	
		- LO	04	4 u	25	200	٥ م		۰		رما د	0	Q, I	ഹ	-	~ ~	-	•					ഹ	ا بن	ب د	ي ا	Ç.	÷	SHIFI
	* *	: 4x	* *	* *	, K	ωρ * *	13.	*17	*25	*28	\$43	* 49	\$55	36	9;	7.4	*85	*914	86.	: :	6	**5	9	* 5	× *	**26	**	1	్రహ
	35,	•		8	-	- 18	25	1	-	•	Ŝ	-	-		ě	2 ^	-			⊇ ′	-		-	Ü,		-		•	_

HOUR OF THE DAY

Figure 45. Work center matrix

The concept for using data in this form was originally suggested by the RAND Corporation (Bell & Stucker, 1971, pp 227-229). The criterion of deferred demands per shift (X) is computed as a function of aircraft available hours using the equation shown on Figure 45. An example computation with x = .05 is illustrated. The closest value not exceeding this computed criterion is located in the summary column for each shift, and a horizontal line drawn below it. The shift manning for that criterion is indicated immediately below this line on the extreme left axis. For the example shown in Figure 45 the computed criterion is 96 demands or "ticks." The closest number in the first shift cumulative sum column that does not exceed 96 is 68. A line is drawn below 68 and carried over to the left axis. This indicates a relative shift manning of 26 431X1s.

These matrix results are used to determine the proportion of people to put on each shift. The total number of people to be assigned is determined from the direct manhours of work required, as described in paragraph 2 of this section. For the example shown in Figure 45, the number of 431Xls required per day would be multiplied by 26/65 to determine first shift manning. A little experimentation can often locate an X value that corresponds to the total manning to be allocated, and cuts down the amount of manual computation.

Procedure for Constraining Manning

The simulation is first run with no resource constraints, defaulting to the high resource levels originally set in the input processor on LCOM 13 and 16 cards (Section VI). Work center matrices and monthly manhour requirements are obtained from this run and used to compute the first daily manning constraint, as described in paragraph 3 of this section. These constrained levels of shift manning are punched on 46 cards (Section VII, paragraph 1).

The simulation is rerun with the 46 cards included in the run deck. This time the matrix output will include a set of backorder matrices showing the number of demands not satisfied by time of day. The performance summary from the constrained run is checked to see whether any AFSCs show a higher manhour utilization than the assumed utilization criteria for direct work. If so, the manning must be recalculated based on manhours shown, and the simulation rerun until utilization in all work centers falls within the utilization criteria assumed.

If the real sorties accomplished dropped more than 5% from the unconstrained run, additional people may have to be added in one or two bottleneck work centers to meet the required flying program. The bottleneck candidate is picked from an analysis of the backorder matrix, of percent demands unsatisfied from the performance summary, and the difference between the numbers shown on the matrix and actually manned on shifts during the initial shift allocation. Those work centers with the least buffer of indirect and

deferable shop work are the most likely to be the bottleneck. For a given "X%" criterion, they will show the greatest difference between flight line matrix determined manning and computed manning to accomplish required manhours of work. The 431Xls are a likely bottleneck candidate since they do not do any shop work.

The bottleneck work center is constrained using the matrix figures rather than the Ms computation to determine daily manning requirements. The simulation is rerun with new 46 cards giving matrix manning for this work center. The other 46 cards are left as is. The process is repeated using different X values for the matrix manning computation until the sortie loss is close to but not exceeding 5% of the unconstrained run. The 46 utilization rate for the other AFSCs is checked and the simulation rerun for any "fine tuning" adjustment on the final manning constraint.

Computing Direct Manning

The number of direct authorizations necessary to provide the required daily shift manning that was determined by constraining the simulation depends on how many hours per month a man is available to work. Additional people may be necessary to provide full coverage of all shifts for the entire month.

The available hours per month to be assumed in manning computations are established by AFM 26-3 standards. Examples are 242 hours per month for sustained combat flying, or 144 hours per month in peacetime. The direct manning requirement for an AFSC is:

M = M_S (Workdays/Mo.) (Shift Length) Available Hours/Man/Mo.

Where Ms = required daily manning determined from the final constrained simulation run rounding off in these computations is done in accordance with AFM 25-5 criteria (1, P 7-8) shown in Figure 46.

Note that with eight hour shifts in a 30 day per month sustained combat situation where the standards are .6 direct work and 242 available hours per month, these factors will cancel out and:

$$M = M_{S}$$

This is a reasonable set of assumptions for many tactical combat scenarios, and eliminates one step in the manpower computation. However, if shifts are varied to match workload total requirements may change.

Authorized Manpower	Fractional Manpower Cutoff
1	1.077
2	2.154
3	3.231
4	4.308
5	5.385
6	6.462
7	7. 539
8	8.616
9	9.693
10	10.770
11	11.847
12	12.924
13	13.999
Over 13	Authorized Manpower +.999

Figure 46. Criteria for rounding in manpower computations.

Example of Manning Computations

A recommended format for recording and tabulating data is shown in Figure 47. The example illustrated is for a peacetime scenario in which there were 23 flying and maintenance workdays per month with three eight hour shifts per day. The direct utilization criterion was .60 and availability was 142 hours per man per month.

The first column of the tabulation lists the AFSC and the second column gives the resource ID number from the LCOM input processor. This number must appear on the "46" cards for each AFSC. The next three columns give the monthly manhours shown on the LCOM performance summary report for months two, three and four. Note that 23 day months were one of the assumptions of this scenario. Data from the first simulated month is always omitted. The three month manhours are summed and this total divided by 331.2 to get the daily requirement. This figure was obtained by:

$$M_S = \frac{(3 \text{ Mos. LCOM Manhours})}{(3 \text{ Mos.}) (.6) (23) (8)} = \frac{3 \text{ Mos. Manhours}}{331.2}$$

The next column gives the daily total of crew or post manning. The labor of the daily manning columns is used to allocate manning to the three shifts according to the proportion that were shown as an unconstrained matrix program run. Note that daily manning for AFSC 328X3 is determined by crew size rather than manhours.

The computation of direct manning required is:

$$M = M_s \frac{(8) (23)}{142} = 1.295 Ms$$

This would not normally be done until the final iteration. $M_{\rm S}$ values to two decimal places are used to avoid rounding twice with the AFM 25-5 criteria. The X column would be checked in the final tabulation if the AFSC were constrained by Matrix to meet peak demand and the M column would indicate the card number for Moody manpower program input (Section IX).

IX. DETERMINING MANNING REQUIREMENTS

Integrating Simulation Results

Manning requirements should be determined with the simulation for three different sets of form 20s, holding everything constant except sortie rate and corresponding flying hours. The results of these runs are then combined in the regression program to produce manhour and/or matrix based manning equations for each work center. These equations are similar to the curves shown in Figure 44, except that the axes are direct manning requirements and flying hours per month. The conversion is equivalent since the manning assumptions and sortie length are held fixed for a given series of runs.

CONSTRAINT # 1	/INT #														
i	Res.		тсом м	LCOM MAN HOURS		Daily Manning	Daily Post	Per Shift	A110	Allocated/	+	<u> </u>) fract	Direct= 1 295 Ma	1
AFSC	Id. No.	Day 24-47	Day 47–69	Day 70–92	3 Mos. Total	3 Mos. Tot. 331.2	Manning or Min. Crew		Sh	Shift 2	T_	×	Man	Post or Crew	×
322X1	2	4631	4583	6687	14113	(43)	9	2	7	12	27	\parallel	(52)	8	
325X0	3	742	707	691	2140	(2)	9	2	2	2	۳ س		(C)	8	1
325X1	7	0707	2332	2303	6675	(82)	7	2/3	2	80	유	 	78	6	1
328X0	5	957	915	841	2713	(®)	9	2	2	2	4	 	XE.	8	1
328X1	ė	1223	1066	1196	3485	(01)	9	2	2	4	4	-	X(2)	8	1
328X3	7	237	238	150	625	2	(9)	2	2	7	2	\vdash	7~	(8)	
328X4	8	2716	2935	2625	8276	(25)	9	2	2	00	15		(32)	8	
						<				\top	-	+)		1
						 					1	{			1

Figure 47. Example of manning constraint tabulation.

Data from the simulation runs on three scenarios are entered in the following format, one card per AFSC:

Co1 5 Cols 8-10 intercept (normally zero) Cols 11-15 flying hrs/mo, scenario #1 final direct MHR/matrix manning scenario #1 Co1s 18-20 Cols 21-25 flying hrs/mo, scenario #2 final direct MHR/matrix manning, scenario #2 Co1s 28-30 Co1s 31-35 flying hrs/mo, scenario #3 Co1s 38-40 final direct MHR/matrix manning, scenario #3 Co1s 45 Co1s 48-50 intercept as entered in columns 8-10, normally zero Co1s 51-55 AFSC Co1s 59-60 FC Cols 61-64 function code Co1s 69-70 minimum crew or post manning direct manning constant Cols 75 card number for entry into Moody manpower program

The AFSCs entered on these cards are "real" AFSCs corresponding to the work centers defined by the operational command. LCOM AFSCs broken out to distinguish requirements for dedicated cadres or post manning must be combined back together to fit the operating command's function code structure. The minimum crew size requirements and manhour requirements must also be summed when LCOM AFSCs are combined.

If direct manning within any set of LCOM AFSCs being combined was determined on different bases, the post manning or minimum crew size determined direct manning must be added to the manhour determined direct manning, and this total entered as manhour determined direct manning. In this case, the post manning determined direct manning component is entered instead of zero as the intercept. For example, LCOM AFSCs 431A1, 431R1, and 431X1 must be combined as 431X1. The direct manning (431X1 manhours, 431R1 and 431A1 post manning) is all summed and entered as manhour determined direct manning for 431X1. The sum of the post manning determined fixed components for 431A1 and 431R1 is entered as the intercept in this case. The fixed component entered for 431X1 is the sum of minimum crew and post manning for 431X1, 431A1, and 431R1.

Parameters and data are put into the RGR control deck in the following order:

a card with zeros in columns 1 and 5 end of file card data cards for each AFSC, entered in card number order

The regression outputs are a series of punched cards giving work center equations for input to the Moody manpower program, and a printout showing the degree and goodness of fit of these pylonomial regression equations. The run sequence is shown in Figure 48.

Producing a Basic Manpower Authorization Document

The direct manning determined in the various simulation runs and expressed as a regression equation is not a complete manning requirement. All the work centers are not covered by the simulation (Section VIII, paragraph 1). Only direct manning requirements are considered in the simulation but a maintenance organization must include provisions for shop supervision and an administrative staff. Finally, a complete manning document must consider grade levels. The LCOM data base described in this report identifies AFSC by specialty only.

The Moody manpower program is initially set up with standards for work centers not simulated, supervision rates, overhead organization requirements for various unit sizes, and grade spread criteria. This information is obtained from the operating command for the aircraft being simulated. AFHRL-TR-74-97(V) describes how standard data is structured and entered into the manpower program.

To run the Moody manpower program, the user must input a desired flying hour program and unit size, and a matching set of cards that were punched out by the regression program containing direct manning equations and fixed post or crew manning components for each work center. The Moody program then uses the greater of manning from the equation or fixed manning component in each work center, figured at the specified flying hours, as the direct work center manning. It adds in other work centers, at standard, and figures the necessary provision for supervision. After adding in the appropriate overhead structure for the unit size, it figures grade spread. The output is a complete basic authorization document for a maintenance organization, in printout and on punch cards.

The parameter card for a Moody manpower run is prepared in the following format:

- Cols 2-6 Flying hours per month for which a manning document is desired (e.g., for a 72 aircraft unit flying a wartime program of 50 hrs/AC/MO, enter 3600)
- Cols 7-8 Unit size (e.g., 72 aircraft)
- Cols 9-11 AGE manning factor (e.g., 75 spaces per aircraft) as obtained from the operating command. This factor is not used if AGE maintenance is modeled and AGE work center manning is simulated.
- Cols 12-13 A format control: +1 = print and punch, 00 = print
- Cols 14-16 999
- Cols 17-23 Alpha-numeric run title
- Cols 24-25 Hours/aircraft/mo (if unclassified, otherwise 00)

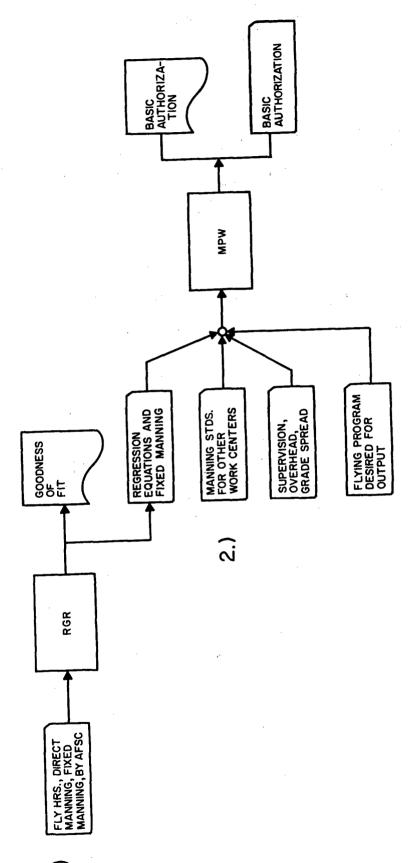


Figure 48. Regression and Moody manpower programs.

Cols 26-28 Sorties/aircraft/day (if unclassified, otherwise 00)

Cols 29-31 Average sortie length

Cols 31-34 Aircraft MDS

The parameter card is followed by the set of work center regression cards for appropriate unit size.

To get a full complement of outputs for manpower planning, three flying hour schedules for each of three different organization sizes should be simulated. A set of regression cards would then be obtained for each unit size.

Use of the regression and manpower programs permits manning for a range of flying programs to be quickly obtained from the simulation of three consistent points. The simulated hours scheduled or flown on any of the three do not have to match the flying hour inquiry, but should be in the same range. The procedure has the further advantage of assuring an optimum scheduling. The answer for any given scenario can vary with the percent of aircraft scheduled over and above the target flying program and the simulation results seldom hit exactly on target. By redefining the flying hours achieved as the scheduled program for regression program input, overschedule becomes an output of LCOM and is consistent through the range of the regression equations.

Variations and Updates

The regression and Moody manpower programs eliminate the need for many additional expensive simulation runs to determine the impact of alternative flying programs, provided other scenario assumptions remain constant. A change in these assumptions does not necessarily require a complete rerun. The regression program includes an option for proportionate shifting of direct manning equations based on the simulation of one new point. The curve continues to pass through the same origin, as shown in Figure 49.

The RGR deck setup for the curve shifting mode is as follows:

Card with 0 in column 1, and three or four in columns to indicate which field new data will appear in

Set of AFSC cards with regression equations that were punched out on original RGR program run

End of file

A set of AFSC input cards with the third (Columns 21-30) or fourth (31-40) data fields changed to show manning and flying hours for the new simulated points, as indicated on the first card above

The curve **shifting** feature is particularly useful for sensitivity testing, since all results can be brought back to the same baseline. It is applicable for most changes where manning is determined from the constant or manhour derived curves which are known to be nearly linear. It should be

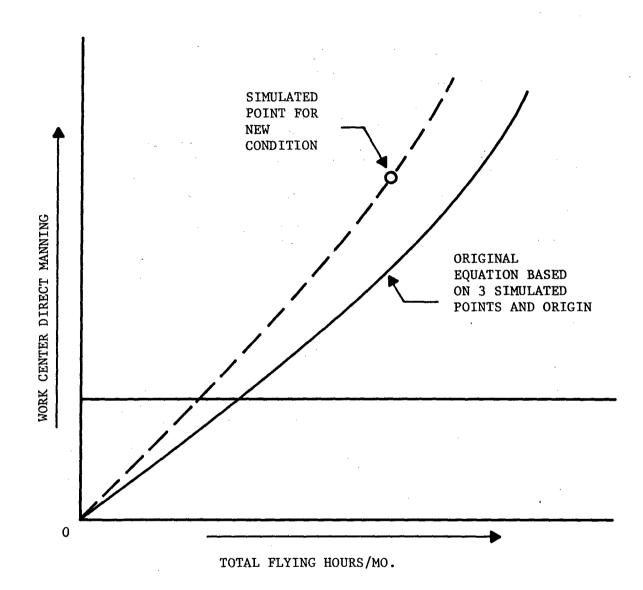


Figure 49. Curve shifting.

used with caution when extrapolating manning on portions of the curve that are matrix determined, since the general shape of peak demand functions is not yet well defined. Neither does this feature eliminate the need for periodic updates of the whole model.

The method of shifing curves in the regression program is explained in AFHRL-TR-74-97(V).

REFERENCES

- Air Force Manual 25-5. Management engineering policies and procedures. Washington, D.C.: Department of the Air Force, 8 August 1973.
- Air Force Manual 26-3. Air Force manpower standards. Washington, D.C.: Department of the Air Force, 27 February 1973.
- Air Force Manual 66-1. Maintenance management policy. Washington, D.C.: Department of the Air Force, 1 August 1972.
- Bell, C.F., & Stucker, J.P. A technique for determining maintenance manpower requirements for aircraft units. RAND Report R-770-PR, RAND Corporation, Santa Monica, California, May 1971.
- Donaldson, T.S., & Sweetland, A.F. The relationship of flight-line maintenance man-hours to aircraft flying hours. RAND Memorandum RM-5701-PR, RAND Corporation, Santa Monica, California August, 1968.
- Drake, W.F., et al. <u>Logistics composite model users reference guide</u>. Air Force Logistics Command Report 70-1, AD-703 328. Headquarters Air Force **Logistics** Command, January 1970.
- Hicks, V.B., & Tetmeyer, D. <u>Data base management programs</u>. AFHRL-TR-74-97(IV). Wright-Patterson AFB, OH.: Advanced Systems Division, Air Force Human Resources Laboratory, December 1974.
- Maher, F.A., & York, M.L. Maintenance manpower management during weapon system development. AFHRL-TR-74-97(I). Wright-Patterson AFB, OH.: Advanced Systems Division, Air Force Human Resources Laboratory, December 1974.
- Moody, W.D., Nichols, S.R., & Tetmeyer, D.C. <u>Manpower program</u>. AFHRL-TR-74-97(V). Wright-Patterson AFB, OH.: Advanced Systems Division, Air Force Human Resources Laboratory, December 1974.
- Nichols, S.R., & Tetmeyer, D.C. <u>Maintenance data analysis programs</u>.

 AFHRL-TR-74-97(III). Wright-Patterson AFB, OH.: Advanced Systems Division, Air Force Human Resources Laboratory, December 1974.
- Tetmeyer, D.C. Estimating and controlling manpower requirements for new systems: A concept and approach. AFHRL-TR-74-31, AD-778 838.

 Wright-Patterson AFB, OH.: Advanced Systems Division, Air Force Human Resources Laboratory, April 1974.

LIST OF SYMBOLS AND CODES

LRU: Line replaceable unit

Main Network Types:

- Mode 1 Preflight to thruflight
- Mode 2 Preflight to postflight
- Mode 3 Thruflight to thruflight
- Mode 4 Thruflight to postflight

Task Codes:

إزورت

- A Obtain and set up powered AGE.
- B Loading or downloading.
- C CALL Section
- D Decrement failure clocks.
- F Failure clock.
- G Fueling or defueling.
- H Inspections, service, scheduled checks.
- J Aircraft handling and moving.
- K In-shop bench check of LRU, find it serviceable.
- L Dummy task for probabilistic determination of which LRU was removed from a failed subsystem.
- M- On-aircraft repair not involving LRU removal.
- N In-shop bench check of LRU, find it broken determine repair can not be made at base level, prepare for shipment and order replacement form depot.
- P Dummy task representing time to obtain replacement LRU from depot.
- Q Draw LRU from base level stock.

- R On-aircraft remove replace of an LRU.
- S Dummy task representing shop entry point.
- T On-aircraft troubleshoot.
- V Inspect or functional check to verify on-aircraft repair.
- W In-shop, bench check and repair LRU.
- X On-aircraft gain access to subsystem and/or LRU.
- Z Fly sortie.

Selection Modes Specifying Network Processiing Logic:

- A Do the task when indicated by a random draw against the specified non-mutually exclusive probability.
- C Do all required task in the defind call section.
- D Do the task.
- E Do the task when indicated by a random draw against the specified mutually exclusive probability.
- F Do the task only when the indicated clock has failed.
- G Do the task when indicated by a random draw against the specified non-mutually exclusive probability, with such draws repeated until at least one task in the set has been selected.
- X Do the task when the following X or F task in the network sequence is to be done (clock within a subsequent call section has failed)

Type Resource Codes:

- I Aircraft
- P Parts
- M Men
- A AGE

Type Task Codes:

- 1 Sortie
- 2 Unscheduled maintenance
- 3 Scheduled maintenance
- 4 Depot repair
- 5 Other